

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1269766

Luminaire Tested: P3AS13R209740DE010 E3DLD1H

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1269766
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-6)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R209740DE010 E3DLD1H
Description: 3in Adjustable LED luminaire with, R20 optic, 4000K CCT AND, 97CRI , E3DLD1H TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 741.0 lumens
Efficiency: N/A
Efficacy: 50.8 lumens/watt
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.83
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1269766

CATALOG NUMBER: P3AS13R209740DE010 E3DLD1H

Luminous Intensity Polar Plot

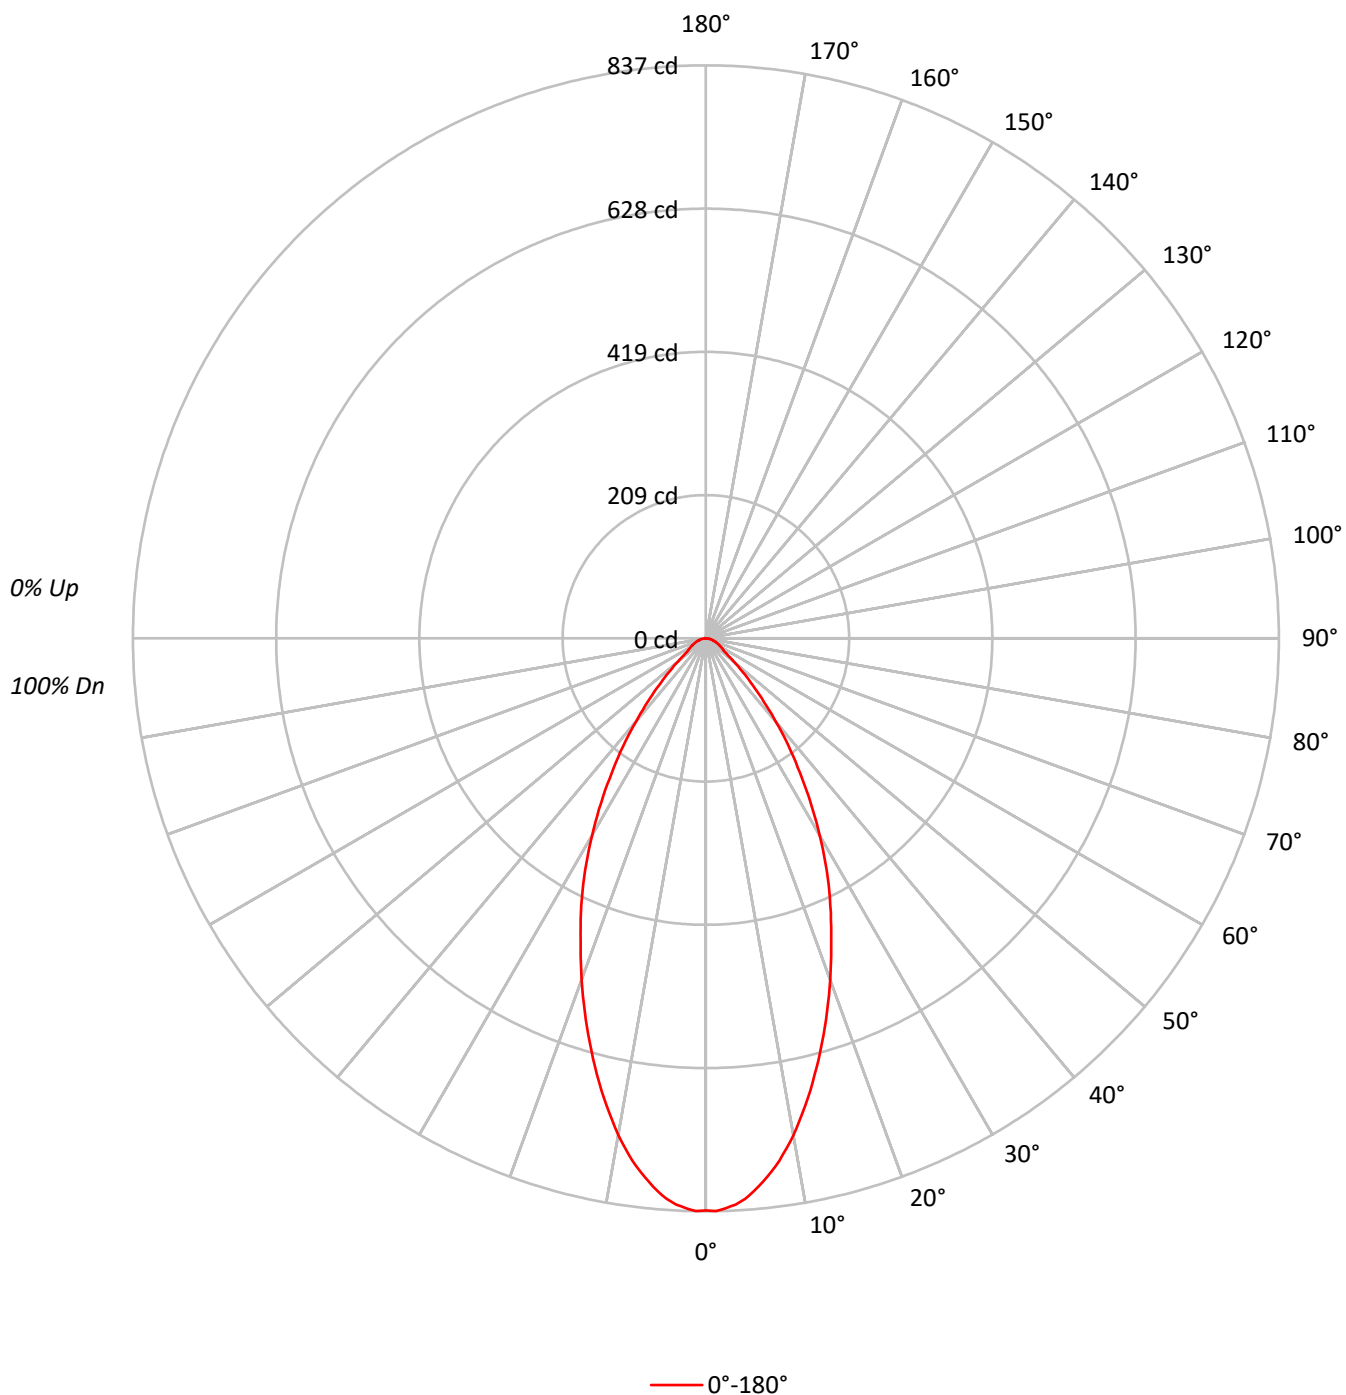

TEST NUMBER: P1269766

CATALOG NUMBER: P3AS13R209740DE010 E3DLD1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	109	106	104	110	107	105	102	103	101	99		99	98	96		96
2	106	100	96	92	104	99	94	91	95	92	89		92	89	87		90
3	100	93	87	82	98	91	86	82	88	84	80		86	82	79		84
4	94	86	79	75	92	85	79	74	82	77	73		80	76	72		78
5	89	80	73	68	87	79	73	68	77	71	67		75	70	67		73
6	84	74	68	63	82	73	67	63	72	66	62		70	65	62		69
7	80	69	63	58	78	69	62	58	67	62	58		66	61	57		65
8	75	65	59	54	74	64	58	54	63	58	54		62	57	53		61
9	72	61	55	50	70	61	55	50	60	54	50		59	54	50		58
10	68	58	51	47	67	57	51	47	56	51	47		56	50	47		55

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	183297
5°	178384
10°	164103
15°	144450
20°	123887
25°	104087
30°	84140
35°	64005
40°	45542
45°	30081
50°	18626
55°	12234
60°	11139
65°	10273
70°	9681
75°	8811
80°	8334
85°	7045

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 30081 cd/sqm

TEST NUMBER: P1269766

CATALOG NUMBER: P3AS13R209740DE010 E3DLD1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	75.0	10.1
10°-20°	177.1	23.9
20°-30°	196.6	26.5
30°-40°	150.0	20.2
40°-50°	76.8	10.4
50°-60°	31.6	4.3
60°-70°	19.7	2.7
70°-80°	11.1	1.5
80°-90°	3.2	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	448.8	60.6
0°-40°	598.8	80.8
0°-60°	707.1	95.4
0°-90°	741.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	741.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	836	
5°	810	75
15°	636	177
25°	430	197
35°	239	150
45°	97	77
55°	32	32
65°	20	20
75°	10	11
85°	3	3
90°	0	

TEST NUMBER: P1269766

CATALOG NUMBER: P3AS13R209740DE010 E3DLD1H

CANDELA DISTRIBUTION (FULL):

0°	
0°	835.9
1°	836.8
2°	833.0
3°	828.3
4°	820.8
5°	810.4
6°	798.2
7°	785.0
8°	770.9
9°	754.0
10°	737.0
12.5°	688.1
15°	636.3
17.5°	583.6
20°	530.9
22.5°	478.2
25°	430.2
27.5°	382.2
30°	332.3
32.5°	285.2
35°	239.1
37.5°	198.6
40°	159.1
42.5°	125.2
45°	97.0
47.5°	73.4
50°	54.6
52.5°	40.5
55°	32.0
57.5°	29.2
60°	25.4
62.5°	22.6
65°	19.8
67.5°	16.9
70°	15.1
72.5°	12.2
75°	10.4
77.5°	8.5
80°	6.6
82.5°	4.7
85°	2.8
87.5°	0.9
90°	0.0

(END OF REPORT)