

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1270038

Luminaire Tested: P3AS13R709740DE010 E3CB1MMS

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1270038
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-48)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R709740DE010 E3CB1MMS
Description: 3in Adjustable LED luminaire with, R70 optic, 4000K CCT AND, 97CRI , E3CB1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1178.0 lumens
Efficiency: N/A
Efficacy: 80.7 lumens/watt
Spacing Criteria (0/90/45): 1.01 / 1.01 / 1.03
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1270038

CATALOG NUMBER: P3AS13R709740DE010 E3CB1MMS

Luminous Intensity Polar Plot

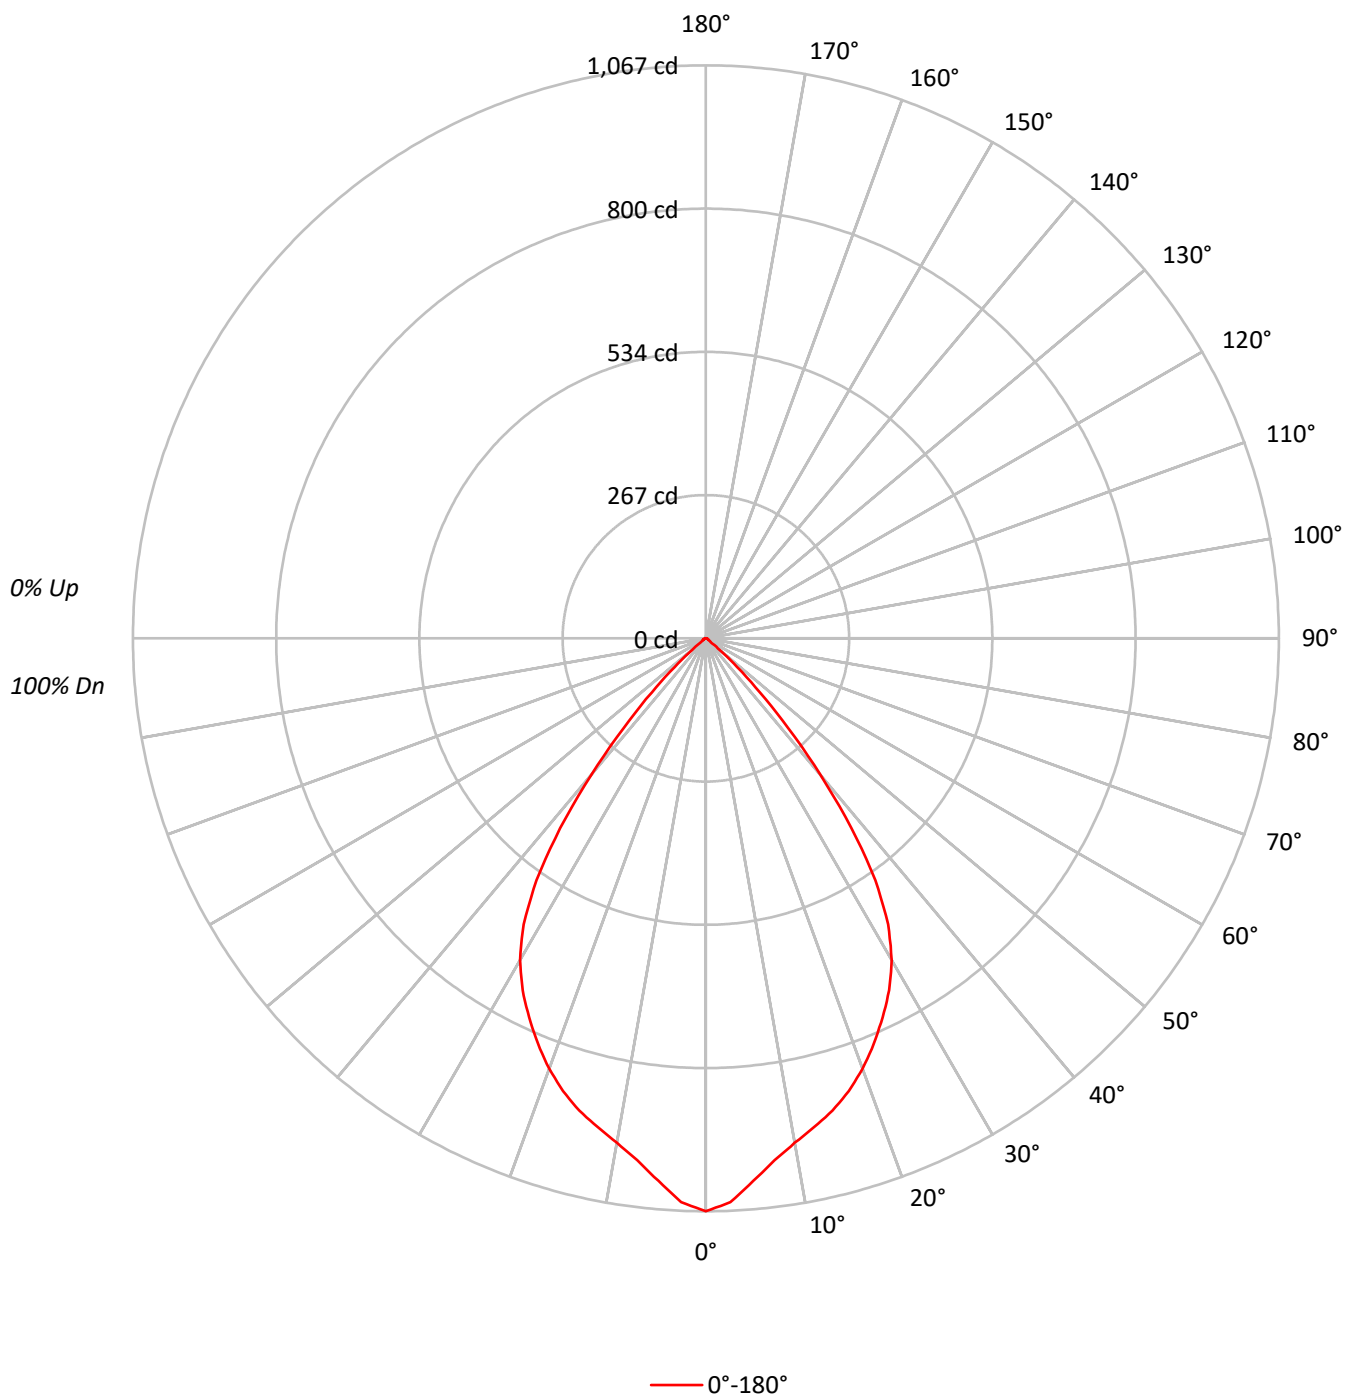

TEST NUMBER: P1270038

CATALOG NUMBER: P3AS13R709740DE010 E3CB1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	105	111	108	106	103	104	102	100		100	99	97		97
2	107	102	97	94	105	100	96	93	97	94	91		94	91	89		91
3	101	94	89	85	99	93	88	84	90	86	83		88	84	81		85
4	95	87	81	77	94	86	81	76	84	79	75		82	78	75		80
5	90	81	75	70	88	80	74	70	78	73	69		77	72	69		75
6	85	75	69	64	83	75	69	64	73	68	64		72	67	63		70
7	80	70	64	59	79	70	64	59	68	63	59		67	62	59		66
8	76	66	59	55	75	65	59	55	64	58	55		63	58	54		62
9	72	62	55	51	71	61	55	51	60	55	51		59	54	50		58
10	68	58	52	47	67	57	51	47	56	51	47		56	51	47		55

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	233929
5°	223200
10°	212376
15°	206698
20°	199051
25°	188382
30°	175217
35°	147204
40°	94863
45°	44098
50°	11565
55°	2867
60°	2895
65°	2439
70°	2436
75°	2372
80°	2399
85°	2264

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 44098 cd/sqm

TEST NUMBER: P1270038

CATALOG NUMBER: P3AS13R709740DE010 E3CB1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	94.9	8.1
10°-20°	255.8	21.7
20°-30°	357.4	30.3
30°-40°	331.4	28.1
40°-50°	118.8	10.1
50°-60°	10.1	0.9
60°-70°	5.0	0.4
70°-80°	3.2	0.3
80°-90°	1.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	708.2	60.1
0°-40°	1039.6	88.3
0°-60°	1168.5	99.2
0°-90°	1178.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1178.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1067	
5°	1014	95
15°	910	256
25°	779	357
35°	550	331
45°	142	119
55°	8	10
65°	5	5
75°	3	3
85°	1	1
90°	0	

TEST NUMBER: P1270038

CATALOG NUMBER: P3AS13R709740DE010 E3CB1MMS

CANDELA DISTRIBUTION (FULL):

0°	
0°	1066.8
2.5°	1050.7
5°	1014.0
7.5°	980.1
10°	953.8
12.5°	932.1
15°	910.5
17.5°	884.1
20°	853.0
22.5°	817.2
25°	778.6
27.5°	739.1
30°	692.0
32.5°	631.8
35°	549.9
37.5°	445.3
40°	331.4
42.5°	226.0
45°	142.2
47.5°	79.1
50°	33.9
52.5°	11.3
55°	7.5
57.5°	6.6
60°	6.6
62.5°	5.6
65°	4.7
67.5°	4.7
70°	3.8
72.5°	3.8
75°	2.8
77.5°	2.8
80°	1.9
82.5°	1.9
85°	0.9
87.5°	0.9
90°	0.0

(END OF REPORT)