

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1270401

Luminaire Tested: P3AS17R709740DE010 E3DLP1LI

Issue Date: 1/30/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1270401  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-45)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS17R709740DE010 E3DLP1LI  
Description: 3in Adjustable LED luminaire with, R70 optic, 4000K CCT AND, 97CRI , E3DLP1LI TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 897.0 lumens  
Efficiency: N/A  
Efficacy: 42.3 lumens/watt  
Spacing Criteria (0/90/45): 0.82 / 0.82 / 0.87  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 21.2  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1270401

CATALOG NUMBER: P3AS17R709740DE010 E3DLP1LI

### Luminous Intensity Polar Plot

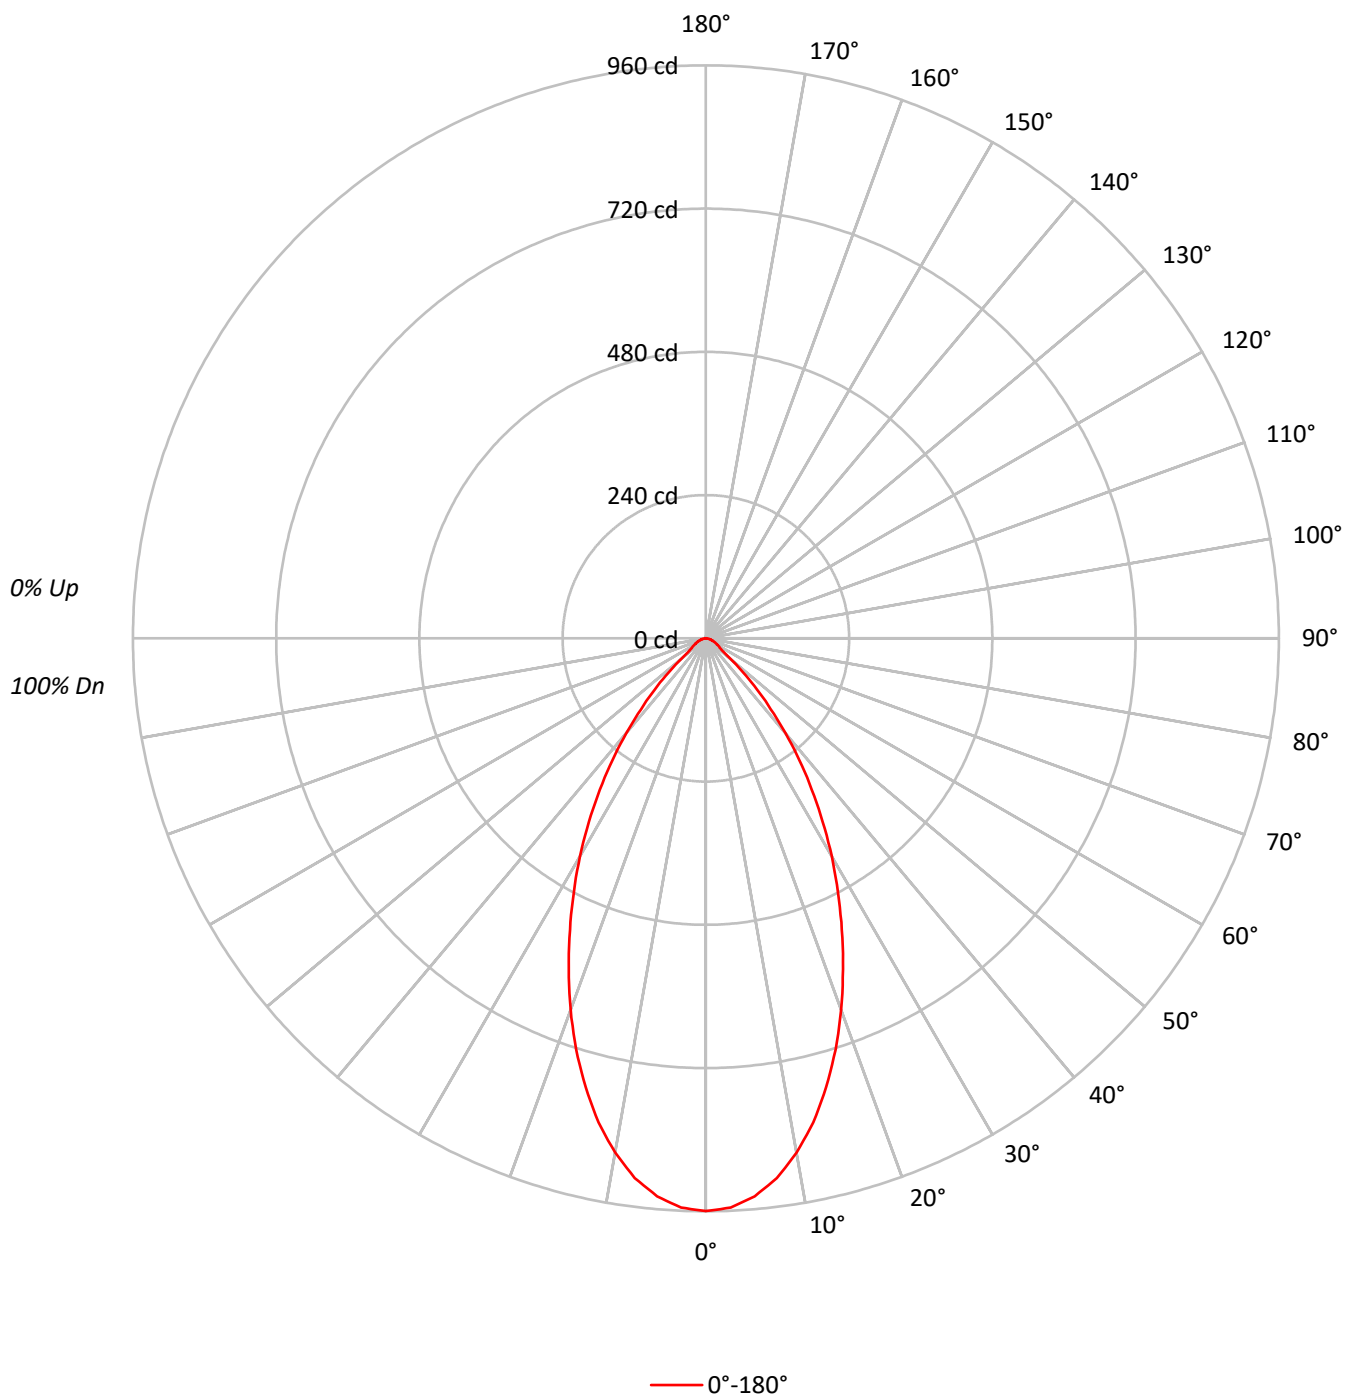

TEST NUMBER: P1270401

CATALOG NUMBER: P3AS17R709740DE010 E3DLP1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|-----|--|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |  | 20  |     |     |  | 20  |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |  | 30  |     |     |  | 10  |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  |
| RCR |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 102 |
| 1   | 113 | 110 | 107 | 104 | 110 | 107 | 105 | 103 | 103 | 101 | 100 |  | 100 | 98  | 97  |  | 96  |
| 2   | 106 | 101 | 97  | 93  | 104 | 99  | 95  | 92  | 96  | 93  | 90  |  | 93  | 90  | 88  |  | 90  |
| 3   | 100 | 93  | 88  | 83  | 98  | 92  | 87  | 83  | 89  | 85  | 81  |  | 87  | 83  | 80  |  | 84  |
| 4   | 95  | 86  | 80  | 76  | 93  | 85  | 80  | 75  | 83  | 78  | 74  |  | 81  | 77  | 73  |  | 79  |
| 5   | 89  | 80  | 74  | 69  | 88  | 79  | 73  | 69  | 78  | 72  | 68  |  | 76  | 71  | 68  |  | 74  |
| 6   | 85  | 75  | 68  | 64  | 83  | 74  | 68  | 64  | 73  | 67  | 63  |  | 71  | 66  | 63  |  | 70  |
| 7   | 80  | 70  | 64  | 59  | 79  | 69  | 63  | 59  | 68  | 62  | 58  |  | 67  | 62  | 58  |  | 66  |
| 8   | 76  | 66  | 59  | 55  | 75  | 65  | 59  | 55  | 64  | 58  | 54  |  | 63  | 58  | 54  |  | 62  |
| 9   | 72  | 62  | 55  | 51  | 71  | 61  | 55  | 51  | 60  | 55  | 51  |  | 59  | 54  | 51  |  | 58  |
| 10  | 69  | 58  | 52  | 48  | 67  | 58  | 52  | 48  | 57  | 51  | 48  |  | 56  | 51  | 48  |  | 55  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 210400 |
| 5°  | 206537 |
| 10° | 194764 |
| 15° | 176755 |
| 20° | 154597 |
| 25° | 130411 |
| 30° | 106776 |
| 35° | 82824  |
| 40° | 59282  |
| 45° | 37523  |
| 50° | 18729  |
| 55° | 11431  |
| 60° | 9868   |
| 65° | 9080   |
| 70° | 8014   |
| 75° | 7371   |
| 80° | 6314   |
| 85° | 6290   |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 37523 cd/sqm

TEST NUMBER: P1270401

CATALOG NUMBER: P3AS17R709740DE010 E3DLP1LI

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 87.6   | 9.8       |
| 10°-20°   | 216.6  | 24.2      |
| 20°-30°   | 246.7  | 27.5      |
| 30°-40°   | 192.9  | 21.5      |
| 40°-50°   | 94.8   | 10.6      |
| 50°-60°   | 29.1   | 3.2       |
| 60°-70°   | 17.3   | 1.9       |
| 70°-80°   | 9.2    | 1.0       |
| 80°-90°   | 2.7    | 0.3       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| <hr/>     |        |           |
| 0°-30°    | 550.9  | 61.4      |
| 0°-40°    | 743.8  | 82.9      |
| 0°-60°    | 867.8  | 96.7      |
| 0°-90°    | 897.0  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 897.0  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°  | Flux |
|-----|-----|------|
| 0°  | 960 |      |
| 5°  | 938 | 88   |
| 15° | 779 | 217  |
| 25° | 539 | 247  |
| 35° | 309 | 193  |
| 45° | 121 | 95   |
| 55° | 30  | 29   |
| 65° | 18  | 17   |
| 75° | 9   | 9    |
| 85° | 2   | 3    |
| 90° | 0   |      |

TEST NUMBER: P1270401

CATALOG NUMBER: P3AS17R709740DE010 E3DLP1LI

**CANDELA DISTRIBUTION (FULL):**

|       | 0°    |
|-------|-------|
| 0°    | 959.5 |
| 2.5°  | 954.5 |
| 5°    | 938.3 |
| 7.5°  | 912.1 |
| 10°   | 874.7 |
| 12.5° | 831.0 |
| 15°   | 778.6 |
| 17.5° | 722.4 |
| 20°   | 662.5 |
| 22.5° | 600.2 |
| 25°   | 539.0 |
| 27.5° | 479.1 |
| 30°   | 421.7 |
| 32.5° | 364.3 |
| 35°   | 309.4 |
| 37.5° | 257.0 |
| 40°   | 207.1 |
| 42.5° | 161.0 |
| 45°   | 121.0 |
| 47.5° | 84.8  |
| 50°   | 54.9  |
| 52.5° | 36.2  |
| 55°   | 29.9  |
| 57.5° | 26.2  |
| 60°   | 22.5  |
| 62.5° | 20.0  |
| 65°   | 17.5  |
| 67.5° | 15.0  |
| 70°   | 12.5  |
| 72.5° | 10.0  |
| 75°   | 8.7   |
| 77.5° | 7.5   |
| 80°   | 5.0   |
| 82.5° | 3.7   |
| 85°   | 2.5   |
| 87.5° | 1.2   |
| 90°   | 0.0   |

(END OF REPORT)