

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1270613

Luminaire Tested: P3AS20R409740D010 E3DLP1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1270613
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-21)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS20R409740D010 E3DLP1GPH
Description: 3in Adjustable LED luminaire with, R40 optic, 4000K CCT AND, 97CRI , E3DLP1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 590.0 lumens
Efficiency: N/A
Efficacy: 20.5 lumens/watt
Spacing Criteria (0/90/45): 0.73 / 0.73 / 0.74
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 28.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1270613

CATALOG NUMBER: P3AS20R409740D010 E3DLP1GPH

Luminous Intensity Polar Plot

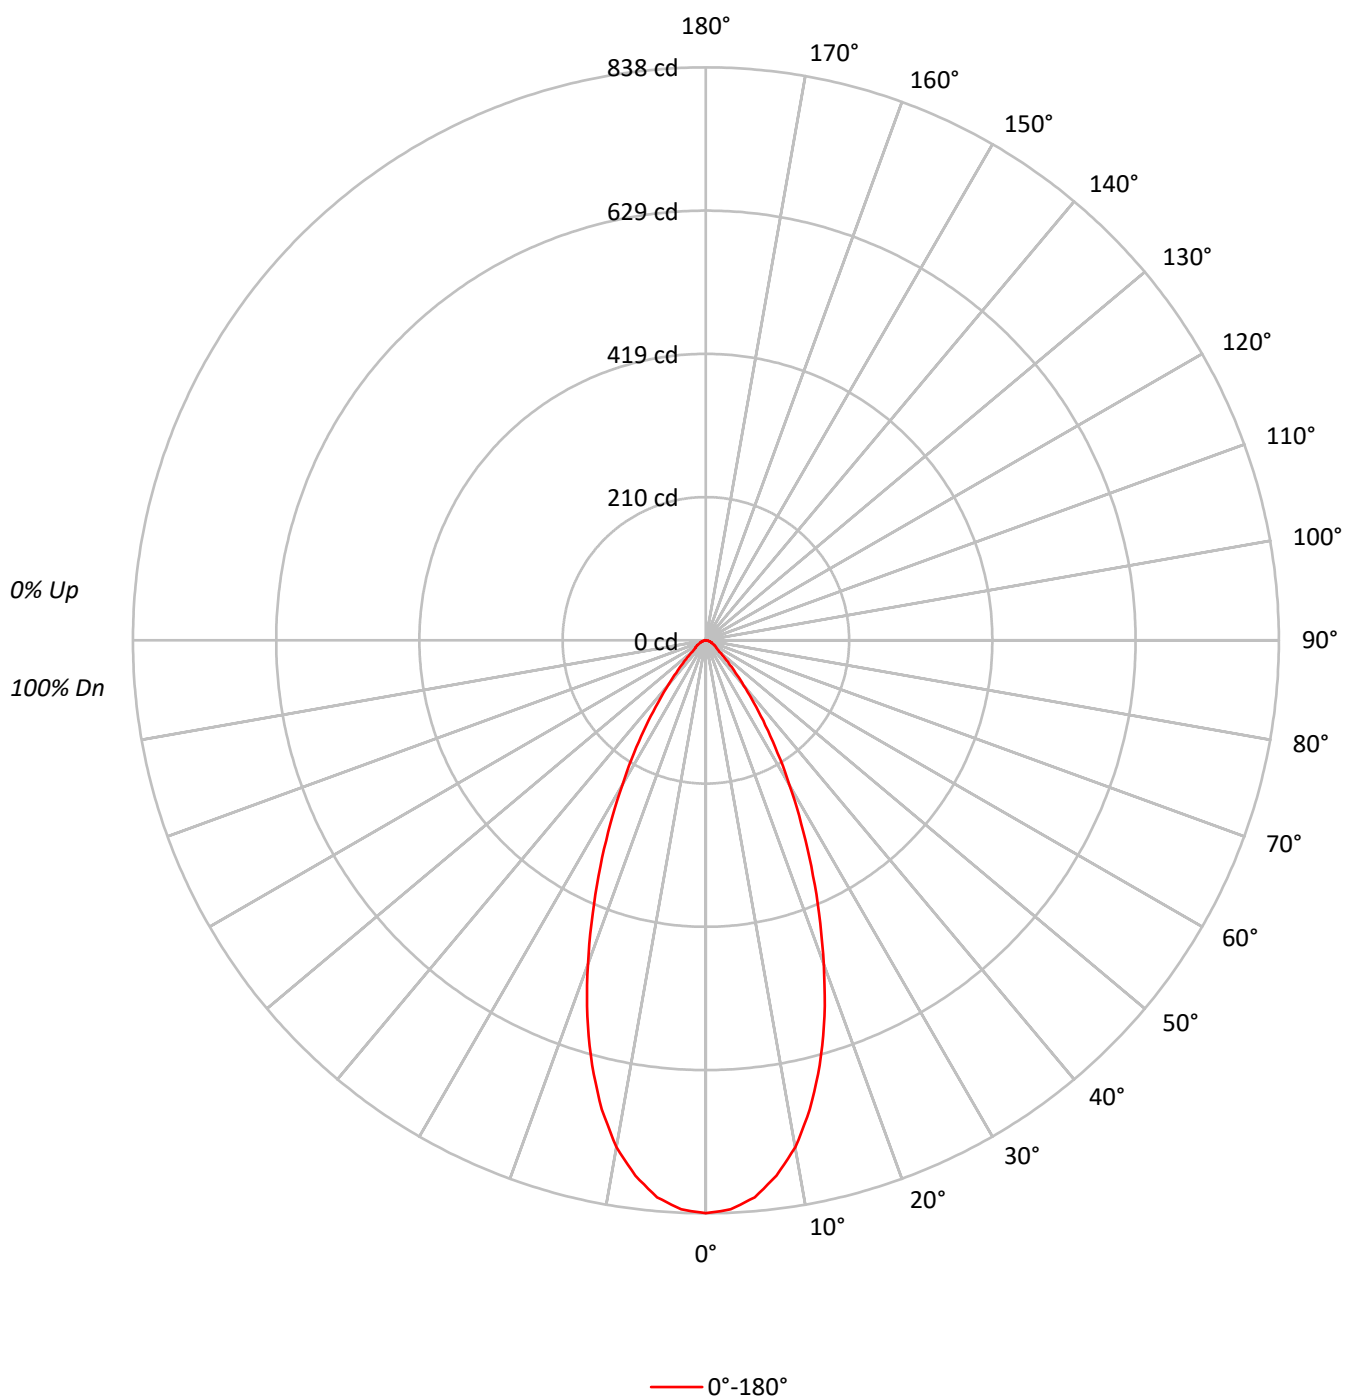

TEST NUMBER: P1270613

CATALOG NUMBER: P3AS20R409740D010 E3DLP1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	108	105	111	108	106	104	104	102	100		100	99	97		97
2	107	102	98	95	105	101	97	94	97	94	91		94	92	89		92
3	102	95	90	86	100	94	89	85	91	87	84		89	85	83		86
4	97	89	83	79	95	88	83	79	86	81	78		84	80	77		82
5	92	83	77	73	90	82	77	73	81	76	72		79	75	71		77
6	87	78	72	68	86	78	72	68	76	71	67		75	70	67		73
7	83	74	68	64	82	73	68	64	72	67	63		71	66	63		70
8	79	70	64	60	78	69	64	60	68	63	59		67	63	59		66
9	76	66	60	56	75	66	60	56	65	60	56		64	59	56		63
10	72	63	57	53	71	62	57	53	62	57	53		61	56	53		60

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	183713
5°	179991
10°	167599
15°	146062
20°	117704
25°	88239
30°	62035
35°	40636
40°	24589
45°	14699
50°	8767
55°	7073
60°	6359
65°	5396
70°	5129
75°	4067
80°	4041
85°	4026

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 14699 cd/sqm

TEST NUMBER: P1270613

CATALOG NUMBER: P3AS20R409740D010 E3DLP1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	75.9	12.9
10°-20°	177.2	30.0
20°-30°	167.0	28.3
30°-40°	96.6	16.4
40°-50°	38.5	6.5
50°-60°	17.1	2.9
60°-70°	10.5	1.8
70°-80°	5.5	0.9
80°-90°	1.7	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	420.1	71.2
0°-40°	516.7	87.6
0°-60°	572.2	97.0
0°-90°	590.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	590.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	838	
5°	818	76
15°	643	177
25°	365	167
35°	152	97
45°	47	38
55°	18	17
65°	10	10
75°	5	5
85°	2	2
90°	0	

TEST NUMBER: P1270613

CATALOG NUMBER: P3AS20R409740D010 E3DLP1GPH

CANDELA DISTRIBUTION (FULL):

	0°
0°	837.8
2.5°	833.0
5°	817.7
7.5°	789.6
10°	752.7
12.5°	702.8
15°	643.4
17.5°	576.7
20°	504.4
22.5°	432.2
25°	364.7
27.5°	302.0
30°	245.0
32.5°	195.2
35°	151.8
37.5°	114.9
40°	85.9
42.5°	64.3
45°	47.4
47.5°	34.5
50°	25.7
52.5°	20.9
55°	18.5
57.5°	16.9
60°	14.5
62.5°	12.0
65°	10.4
67.5°	8.8
70°	8.0
72.5°	6.4
75°	4.8
77.5°	4.0
80°	3.2
82.5°	2.4
85°	1.6
87.5°	0.8
90°	0.0

(END OF REPORT)