

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1270952

Luminaire Tested: P3AS02R359827DE010 E3DLD1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1270952
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-18)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R359827DE010 E3DLD1WMH
Description: 3in Adjustable LED luminaire with, R35 optic, 2700K CCT AND, 98CRI , E3DLD1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 135.0 lumens
Efficiency: N/A
Efficacy: 37.5 lumens/watt
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.87
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1270952

CATALOG NUMBER: P3AS02R359827DE010 E3DLD1WMH

Luminous Intensity Polar Plot

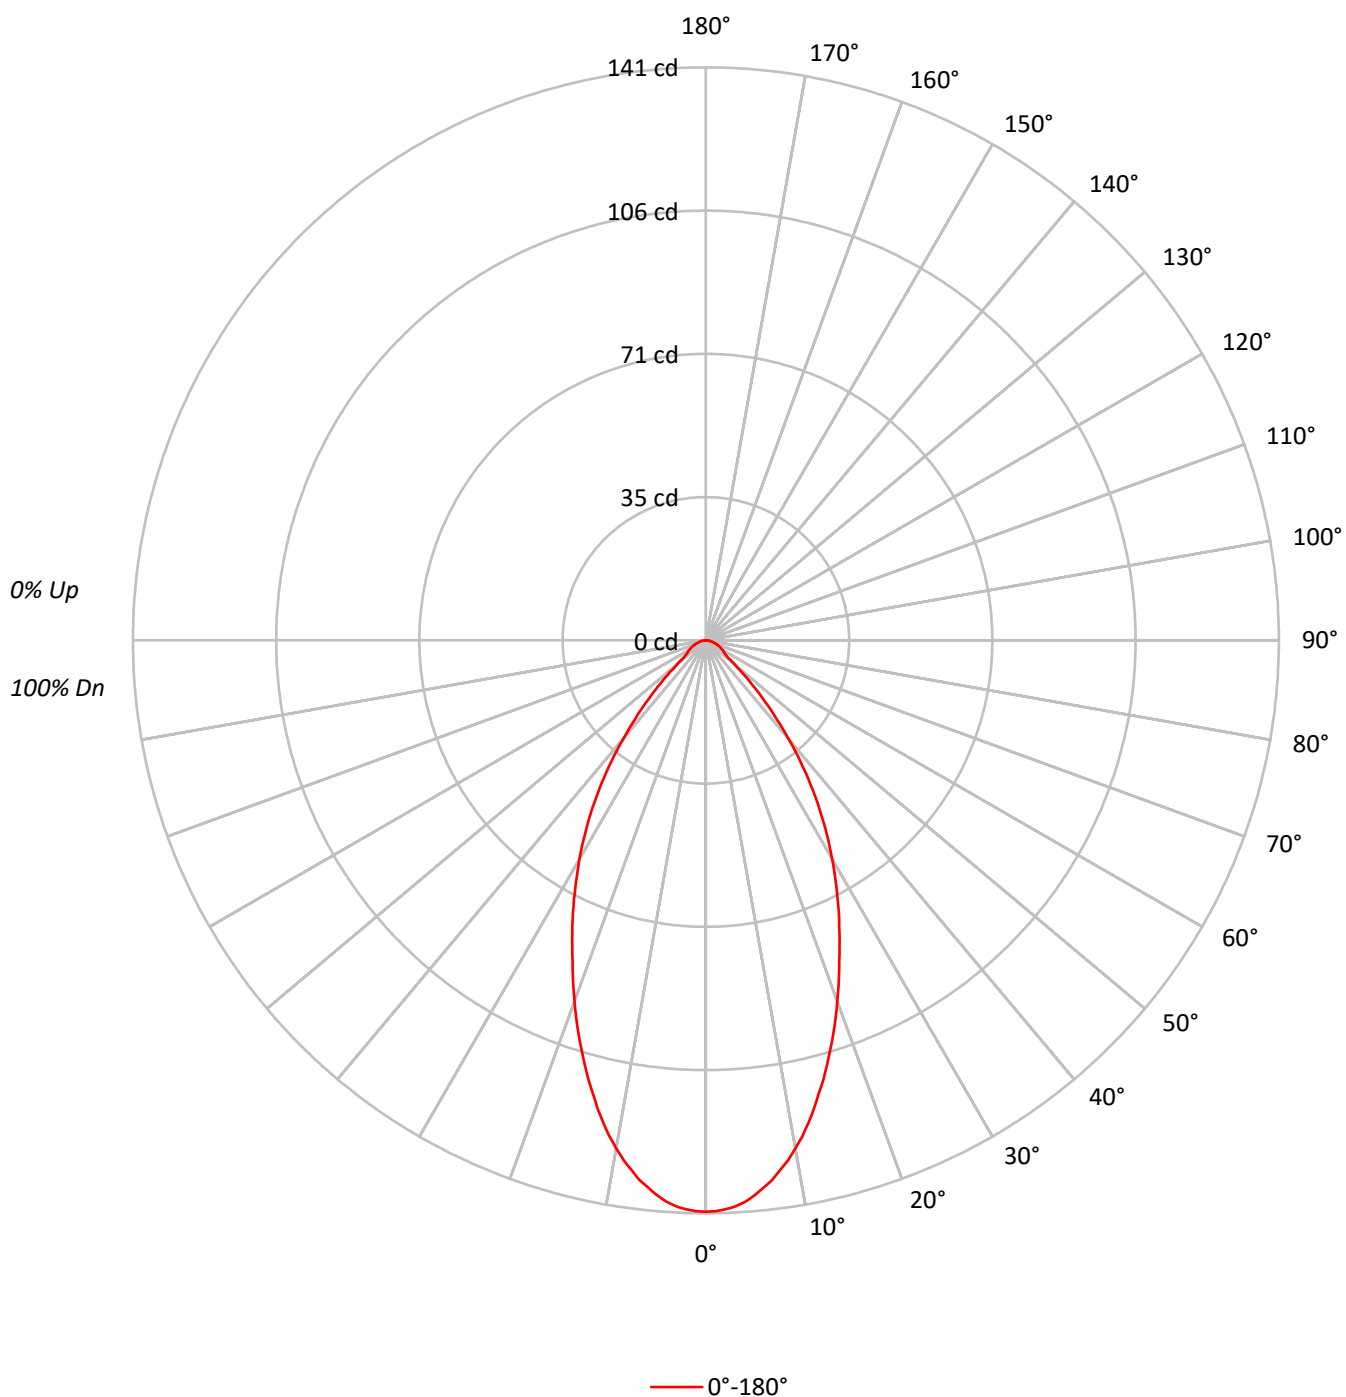

TEST NUMBER: P1270952

CATALOG NUMBER: P3AS02R359827DE010 E3DLD1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	112	109	106	104		110	107	104	102		103	101	99		99	98	96		96	94	93
2	106	100	96	92		104	98	94	91		95	92	89		92	89	87		89	87	85
3	100	92	87	82		98	91	86	81		88	84	80		86	82	79		83	80	78
4	94	85	79	74		92	84	78	74		82	77	73		80	75	72		78	74	71
5	89	79	73	68		87	78	72	67		76	71	67		75	70	66		73	69	66
6	84	74	67	62		82	73	67	62		71	66	61		70	65	61		68	64	61
7	79	69	62	57		78	68	62	57		67	61	57		65	60	57		64	60	56
8	75	64	58	53		74	64	57	53		63	57	53		62	56	53		61	56	52
9	71	60	54	50		70	60	54	50		59	53	49		58	53	49		57	52	49
10	67	57	51	46		66	56	50	46		56	50	46		55	50	46		54	49	46

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	30831
5°	30178
10°	28278
15°	25380
20°	22075
25°	18799
30°	15749
35°	12555
40°	9074
45°	5737
50°	3138
55°	2179
60°	2061
65°	1920
70°	1795
75°	1525
80°	1515
85°	1258

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 5737 cd/sqm

TEST NUMBER: P1270952

CATALOG NUMBER: P3AS02R359827DE010 E3DLD1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	12.8	9.5
10°-20°	31.1	23.0
20°-30°	35.6	26.4
30°-40°	29.1	21.6
40°-50°	14.7	10.9
50°-60°	5.5	4.1
60°-70°	3.7	2.7
70°-80°	2.0	1.5
80°-90°	0.6	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	79.5	58.9
0°-40°	108.6	80.4
0°-60°	128.7	95.4
0°-90°	135.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	135.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	141	
5°	137	13
15°	112	31
25°	78	36
35°	47	29
45°	18	15
55°	6	5
65°	4	4
75°	2	2
85°	0	1
90°	0	

TEST NUMBER: P1270952

CATALOG NUMBER: P3AS02R359827DE010 E3DLD1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	140.6
1°	140.5
2°	140.1
3°	139.5
4°	138.5
5°	137.1
6°	135.5
7°	133.8
8°	131.6
9°	129.5
10°	127.0
11°	124.3
12°	121.4
13°	118.3
14°	114.9
15°	111.8
17.5°	103.3
20°	94.6
22.5°	85.7
25°	77.7
27.5°	69.9
30°	62.2
32.5°	54.6
35°	46.9
37.5°	39.2
40°	31.7
42.5°	24.7
45°	18.5
47.5°	13.3
50°	9.2
52.5°	6.7
55°	5.7
57.5°	5.2
60°	4.7
62.5°	4.2
65°	3.7
67.5°	3.2
70°	2.8
72.5°	2.3
75°	1.8
77.5°	1.5
80°	1.2
82.5°	0.8
85°	0.5
87.5°	0.3



TEST NUMBER: P1270952

CATALOG NUMBER: P3AS02R359827DE010 E3DLD1WMH

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)