

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1271009

Luminaire Tested: P3AS02R459827DE010 E3DLD1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1271009
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-26)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R459827DE010 E3DLD1WMH
Description: 3in Adjustable LED luminaire with, R45 optic, 2700K CCT AND, 98CRI , E3DLD1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 144.0 lumens
Efficiency: N/A
Efficacy: 40.0 lumens/watt
Spacing Criteria (0/90/45): 0.84 / 0.84 / 0.92
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1271009

CATALOG NUMBER: P3AS02R459827DE010 E3DLD1WMH

Luminous Intensity Polar Plot

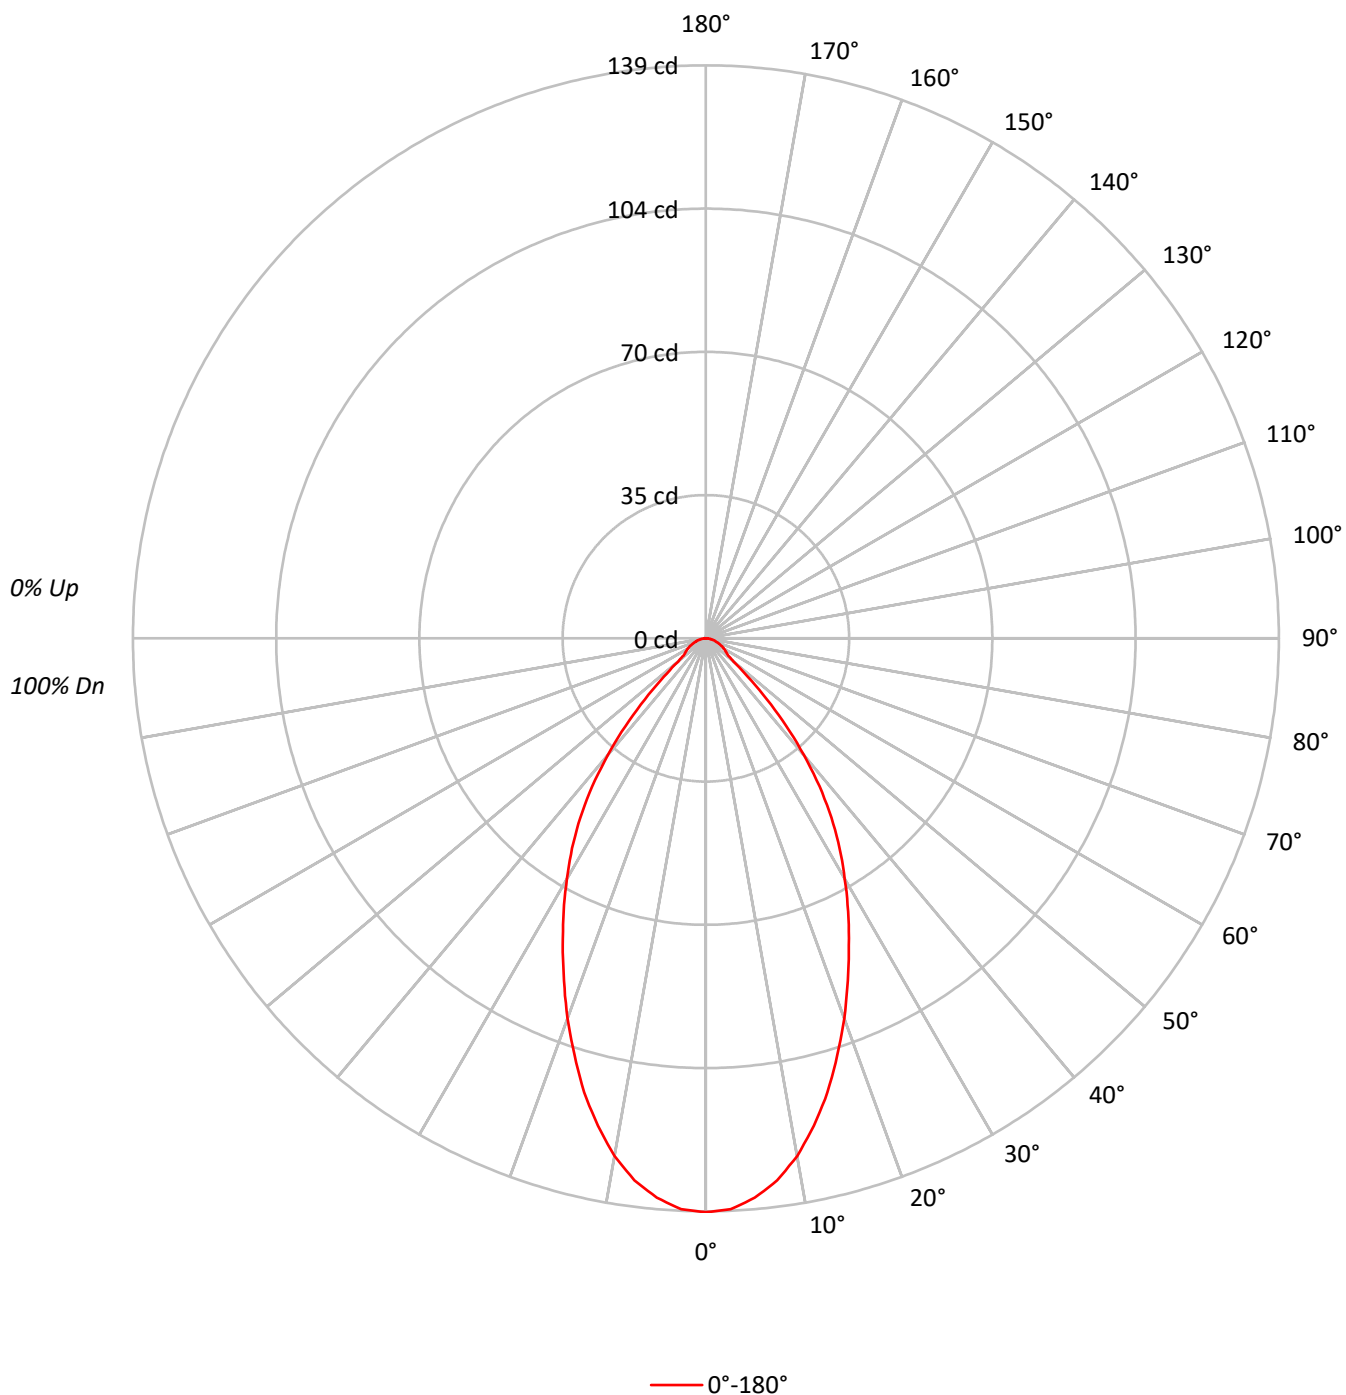

TEST NUMBER: P1271009

CATALOG NUMBER: P3AS02R459827DE010 E3DLD1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		0
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		100
1	112	109	106	104	110	107	104	102	103	101	99		99	97	96		91
2	106	100	95	91	103	98	94	90	95	91	88		92	89	86		83
3	99	92	86	82	97	90	85	81	88	83	80		85	81	78		75
4	94	85	78	74	92	84	78	73	81	76	72		79	75	71		69
5	88	79	72	67	86	78	71	67	76	70	66		74	69	65		63
6	83	73	66	61	81	72	66	61	71	65	61		69	64	60		58
7	78	68	61	57	77	67	61	56	66	60	56		65	60	56		54
8	74	64	57	52	73	63	57	52	62	56	52		61	56	52		50
9	70	60	53	49	69	59	53	49	58	52	48		57	52	48		47
10	67	56	50	45	66	56	49	45	55	49	45		54	49	45		44

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	30524
5°	29980
10°	28390
15°	25880
20°	22892
25°	19864
30°	17066
35°	14214
40°	10591
45°	6481
50°	3002
55°	2332
60°	2237
65°	2075
70°	1923
75°	1864
80°	1642
85°	1258

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 6481 cd/sqm

TEST NUMBER: P1271009

CATALOG NUMBER: P3AS02R459827DE010 E3DLD1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	12.7	8.8
10°-20°	31.7	22.0
20°-30°	37.7	26.2
30°-40°	32.8	22.8
40°-50°	16.4	11.4
50°-60°	5.7	3.9
60°-70°	4.0	2.8
70°-80°	2.3	1.6
80°-90°	0.7	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	82.2	57.1
0°-40°	114.9	79.8
0°-60°	137.1	95.2
0°-90°	144.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	144.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	139	
5°	136	13
15°	114	32
25°	82	38
35°	53	33
45°	21	16
55°	6	6
65°	4	4
75°	2	2
85°	0	1
90°	0	

TEST NUMBER: P1271009

CATALOG NUMBER: P3AS02R459827DE010 E3DLD1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	139.2
2.5°	138.6
5°	136.2
7.5°	132.6
10°	127.5
12.5°	121.1
15°	114.0
17.5°	106.0
20°	98.1
22.5°	89.9
25°	82.1
27.5°	74.7
30°	67.4
32.5°	60.4
35°	53.1
37.5°	45.3
40°	37.0
42.5°	28.9
45°	20.9
47.5°	13.8
50°	8.8
52.5°	6.8
55°	6.1
57.5°	5.6
60°	5.1
62.5°	4.6
65°	4.0
67.5°	3.5
70°	3.0
72.5°	2.5
75°	2.2
77.5°	1.7
80°	1.3
82.5°	1.0
85°	0.5
87.5°	0.3
90°	0.0

(END OF REPORT)