

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1271091

Luminaire Tested: P3AS02R609827DE010 E3DLD1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1271091
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-38)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R609827DE010 E3DLD1GPH
Description: 3in Adjustable LED luminaire with, R60 optic, 2700K CCT AND, 98CRI , E3DLD1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 67.0 lumens
Efficiency: N/A
Efficacy: 18.6 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 1
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1271091

CATALOG NUMBER: P3AS02R609827DE010 E3DLD1GPH

Luminous Intensity Polar Plot

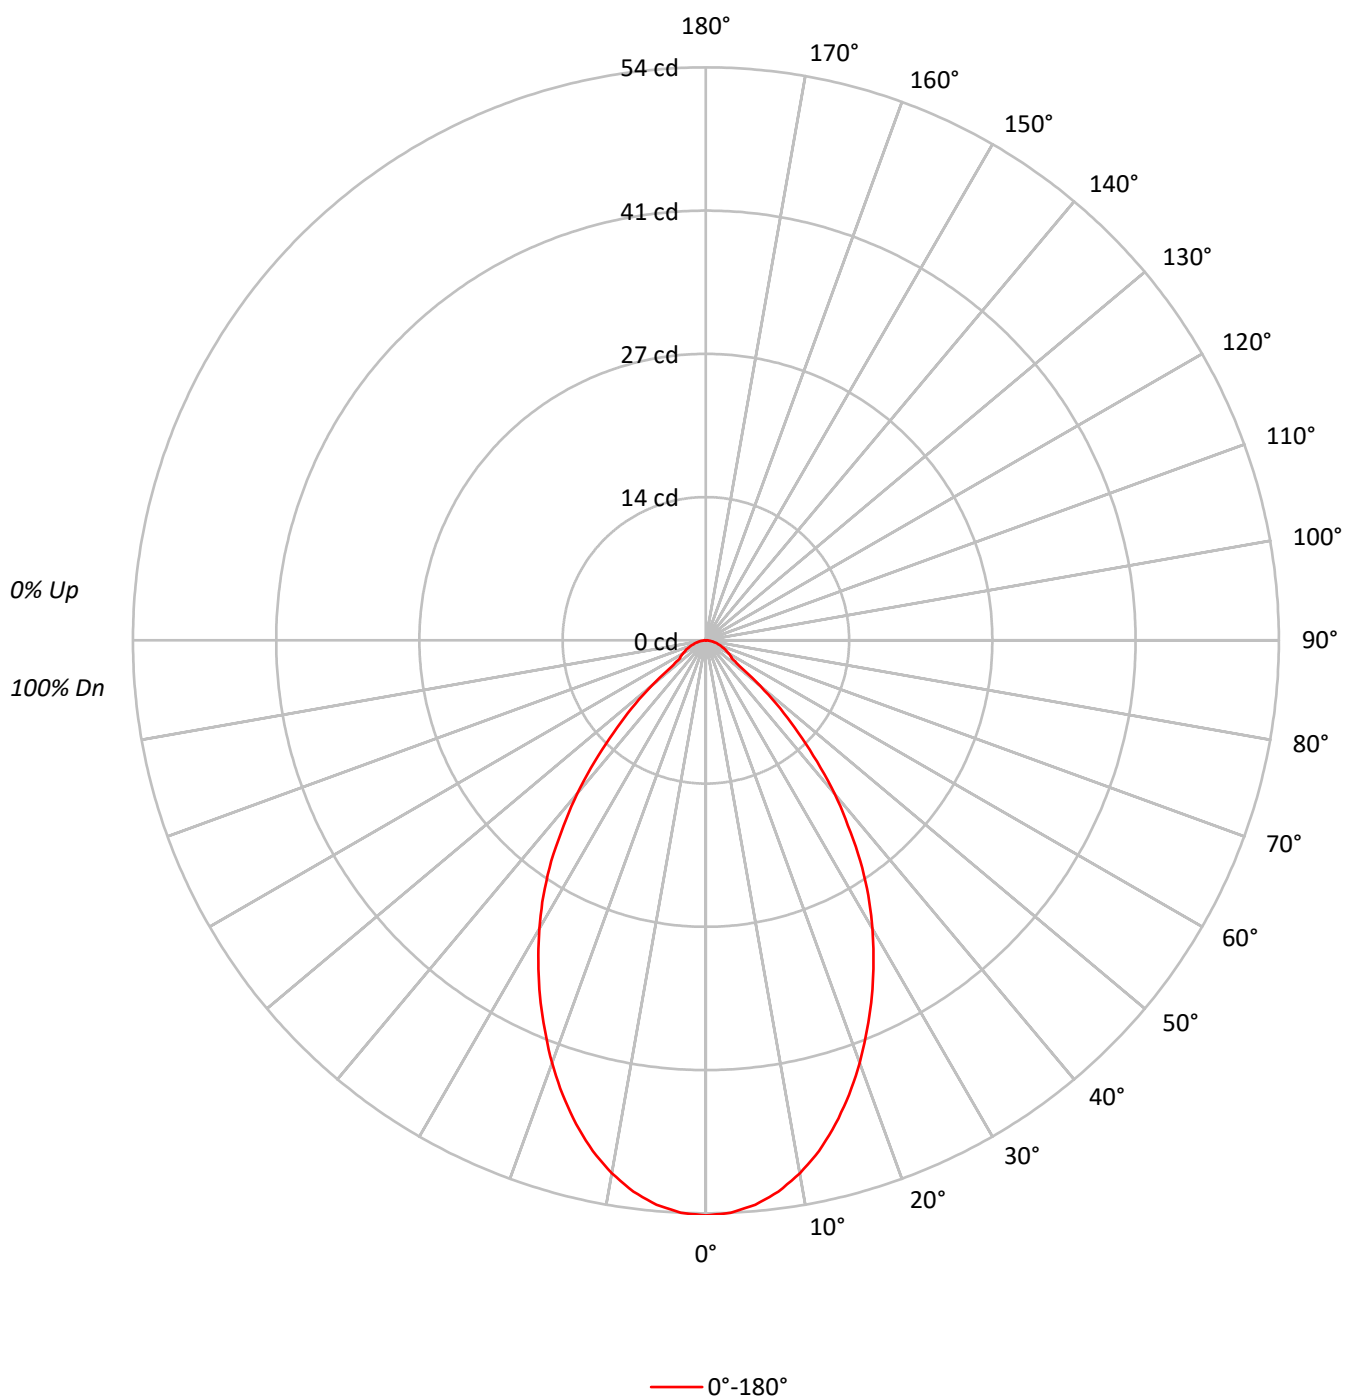

TEST NUMBER: P1271091

CATALOG NUMBER: P3AS02R609827DE010 E3DLD1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	103	110	107	104	101	102	100	98		99	97	95		95
2	105	99	94	90	103	97	93	89	94	90	87		91	88	85		88
3	99	91	85	80	96	89	84	79	87	82	78		84	80	77		82
4	92	83	77	72	90	82	76	71	80	75	70		78	73	70		76
5	87	77	70	65	85	76	69	65	74	68	64		72	67	63		71
6	82	71	64	59	80	70	64	59	69	63	58		67	62	58		66
7	77	66	59	54	75	65	59	54	64	58	54		63	57	53		61
8	72	61	55	50	71	61	54	50	60	54	49		59	53	49		57
9	68	57	51	46	67	57	50	46	56	50	46		55	49	46		54
10	65	54	47	43	64	53	47	43	52	47	43		52	46	42		51

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	11885
5°	11754
10°	11356
15°	10715
20°	9894
25°	8952
30°	7951
35°	6799
40°	5410
45°	3814
50°	2286
55°	1147
60°	1096
65°	1038
70°	962
75°	932
80°	884
85°	503

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 3814 cd/sqm

TEST NUMBER: P1271091

CATALOG NUMBER: P3AS02R609827DE010 E3DLD1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	5.0	7.5
10°-20°	13.2	19.7
20°-30°	17.0	25.3
30°-40°	15.7	23.4
40°-50°	9.6	14.3
50°-60°	3.2	4.8
60°-70°	2.0	2.9
70°-80°	1.1	1.7
80°-90°	0.3	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	35.2	52.5
0°-40°	50.9	75.9
0°-60°	63.7	95.0
0°-90°	67.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	67.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	54	
5°	53	5
15°	47	13
25°	37	17
35°	25	16
45°	12	10
55°	3	3
65°	2	2
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1271091

CATALOG NUMBER: P3AS02R609827DE010 E3DLD1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	54.2
2.5°	54.0
5°	53.4
7.5°	52.4
10°	51.0
12.5°	49.3
15°	47.2
17.5°	44.9
20°	42.4
22.5°	39.7
25°	37.0
27.5°	34.2
30°	31.4
32.5°	28.5
35°	25.4
37.5°	22.0
40°	18.9
42.5°	15.5
45°	12.3
47.5°	9.5
50°	6.7
52.5°	4.0
55°	3.0
57.5°	2.8
60°	2.5
62.5°	2.2
65°	2.0
67.5°	1.7
70°	1.5
72.5°	1.2
75°	1.1
77.5°	0.8
80°	0.7
82.5°	0.4
85°	0.2
87.5°	0.2
90°	0.0

(END OF REPORT)