

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1271185

Luminaire Tested: P3AS05R159827DE010 E3DLP1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1271185
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-1)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R159827DE010 E3DLP1WMH
Description: 3in Adjustable LED luminaire with, R15 optic, 2700K CCT AND, 98CRI , E3DLP1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 212.0 lumens
Efficiency: N/A
Efficacy: 29.4 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.61
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1271185

CATALOG NUMBER: P3AS05R159827DE010 E3DLP1WMH

Luminous Intensity Polar Plot

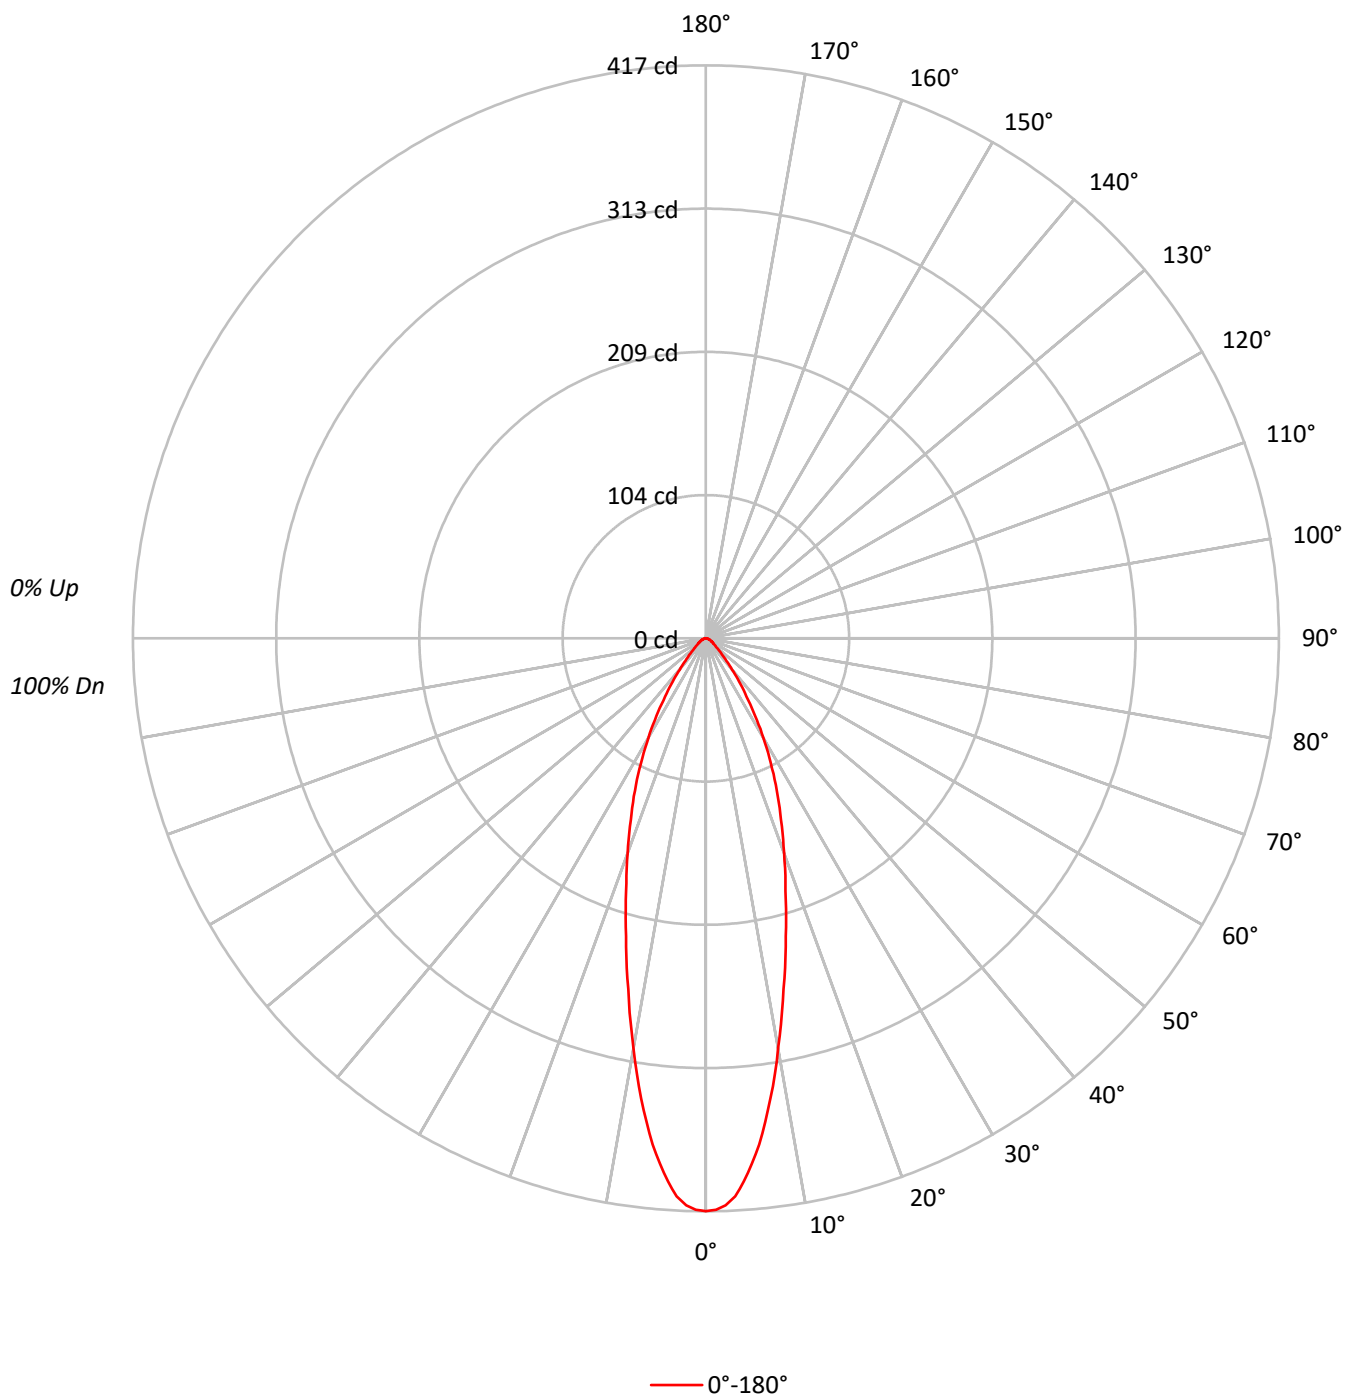

TEST NUMBER: P1271185

CATALOG NUMBER: P3AS05R159827DE010 E3DLP1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	113	110	108	106		111	108	106	104		104	102	101		100	99	98		97	96	95
2	108	103	98	95		105	101	97	94		98	95	92		95	92	90		92	90	88
3	102	96	91	87		100	94	90	86		92	88	85		89	86	83		87	84	82
4	97	90	84	80		95	88	83	79		86	82	78		84	81	78		82	79	77
5	93	84	78	74		91	83	78	74		81	77	73		80	76	72		78	75	72
6	88	79	73	69		87	79	73	69		77	72	69		76	71	68		74	71	68
7	84	75	69	65		83	74	69	65		73	68	64		72	67	64		71	67	64
8	80	71	65	61		79	71	65	61		69	64	61		68	64	61		67	63	60
9	77	68	62	58		76	67	62	58		66	61	58		65	61	57		64	60	57
10	74	64	59	55		73	64	59	55		63	58	55		62	58	55		62	57	54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	91418
5°	84503
10°	67467
15°	50965
20°	38807
25°	29566
30°	21193
35°	13813
40°	8473
45°	5117
50°	3411
55°	2638
60°	2281
65°	1972
70°	1795
75°	1779
80°	1263
85°	755

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 5117 cd/sqm

TEST NUMBER: P1271185

CATALOG NUMBER: P3AS05R159827DE010 E3DLP1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	34.0	16.0
10°-20°	62.7	29.6
20°-30°	55.9	26.3
30°-40°	33.0	15.6
40°-50°	13.5	6.4
50°-60°	6.4	3.0
60°-70°	3.9	1.8
70°-80°	2.1	1.0
80°-90°	0.5	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	152.6	72.0
0°-40°	185.6	87.6
0°-60°	205.6	97.0
0°-90°	212.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	212.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	417	
5°	384	34
15°	224	63
25°	122	56
35°	52	33
45°	16	14
55°	7	6
65°	4	4
75°	2	2
85°	0	0
90°	0	



TEST NUMBER: P1271185

CATALOG NUMBER: P3AS05R159827DE010 E3DLP1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	416.9
1°	415.9
2°	412.8
3°	406.6
4°	396.2
5°	383.9
6°	370.4
7°	354.6
8°	338.1
9°	321.2
10°	303.0
12.5°	261.3
15°	224.5
17.5°	192.8
20°	166.3
22.5°	142.9
25°	122.2
27.5°	102.2
30°	83.7
32.5°	66.8
35°	51.6
37.5°	39.6
40°	29.6
42.5°	22.0
45°	16.5
47.5°	12.7
50°	10.0
52.5°	8.3
55°	6.9
57.5°	5.9
60°	5.2
62.5°	4.5
65°	3.8
67.5°	3.4
70°	2.8
72.5°	2.4
75°	2.1
77.5°	1.4
80°	1.0
82.5°	0.7
85°	0.3
87.5°	0.3
90°	0.0

(END OF REPORT)