

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1271194

Luminaire Tested: P3AS05R209827DE010 E3CD1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1271194
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-8)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R209827DE010 E3CD1MW
Description: 3in Adjustable LED luminaire with, R20 optic, 2700K CCT AND, 98CRI , E3CD1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 435.0 lumens
Efficiency: N/A
Efficacy: 60.4 lumens/watt
Spacing Criteria (0/90/45): 0.35 / 0.35 / 0.34
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1271194

CATALOG NUMBER: P3AS05R209827DE010 E3CD1MW

Luminous Intensity Polar Plot

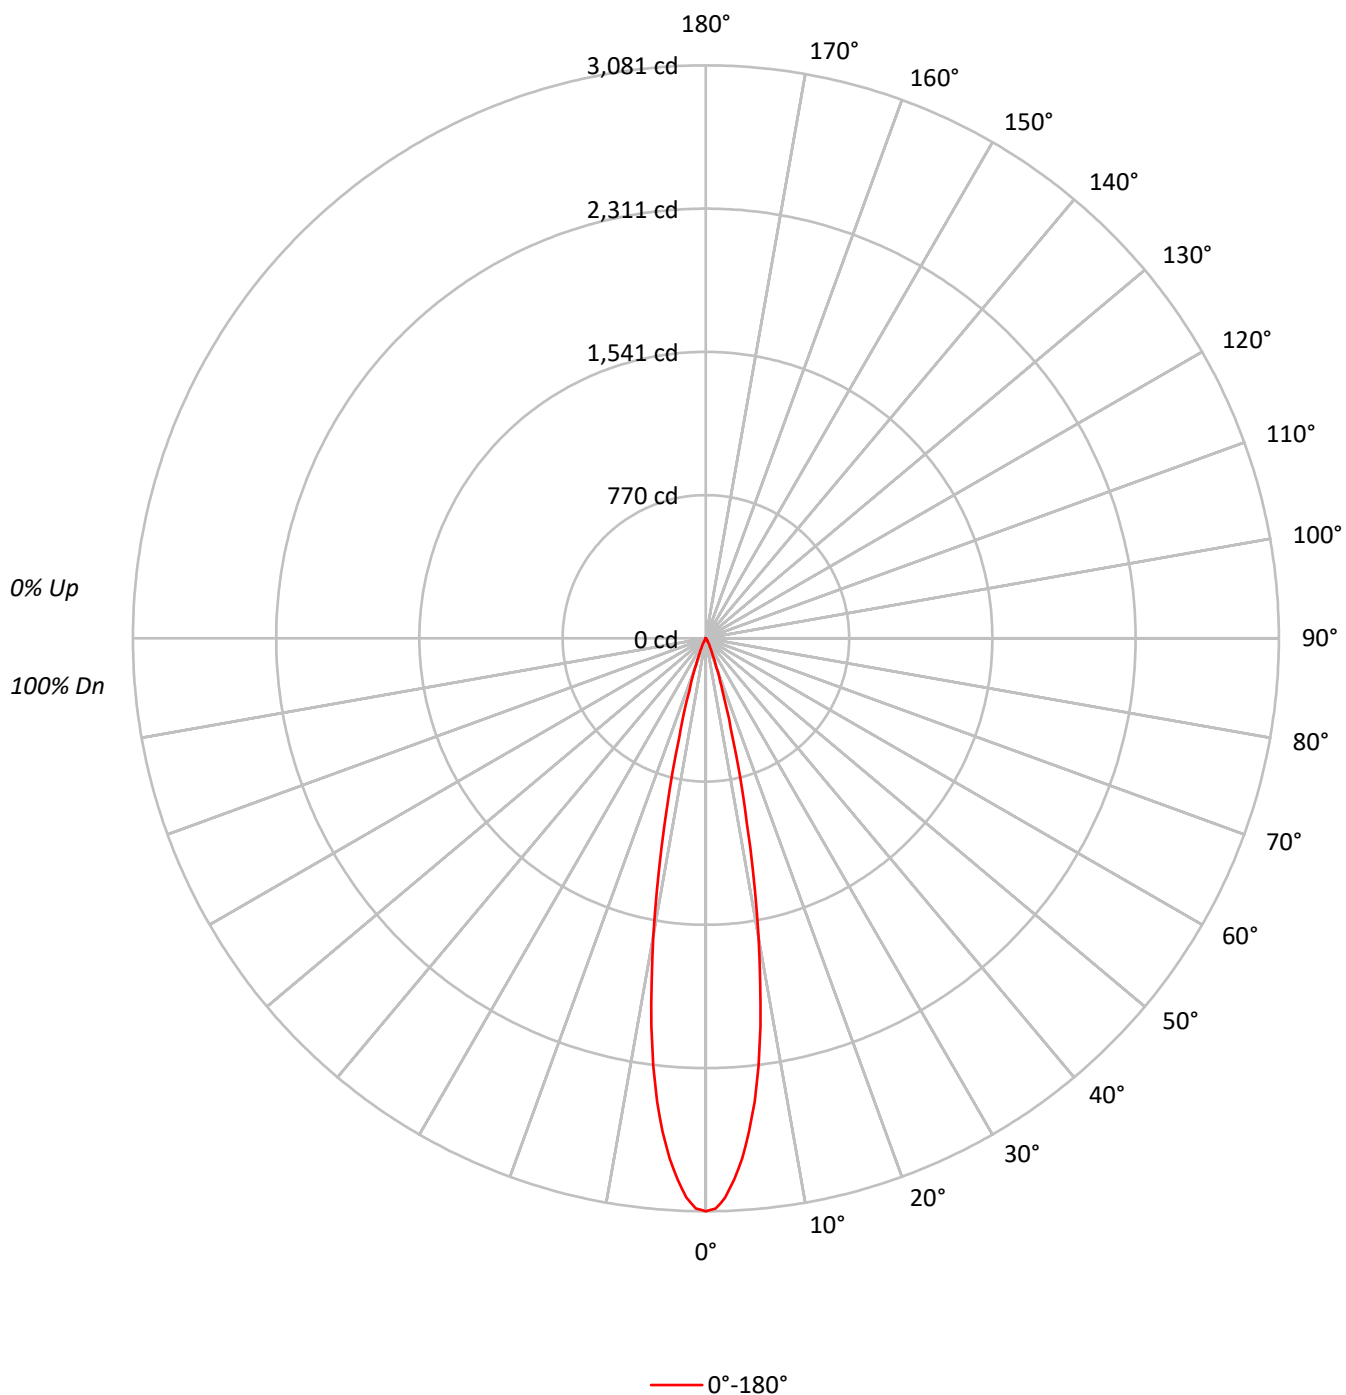

TEST NUMBER: P1271194

CATALOG NUMBER: P3AS05R209827DE010 E3CD1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	116	114	112	110		113	112	110	109		108	106	105		104	103	102		101	100	99
2	112	109	107	104		110	108	105	103		104	103	101		102	100	99		99	98	97
3	109	105	102	100		108	104	101	99		102	99	97		99	98	96		97	96	95
4	107	102	99	96		105	101	98	96		99	97	95		97	95	93		96	94	92
5	104	99	96	93		103	98	95	93		97	94	92		95	93	91		94	92	91
6	102	97	93	91		101	96	93	90		95	92	90		94	91	89		93	90	89
7	100	94	91	88		99	94	91	88		93	90	88		92	89	87		91	89	87
8	98	92	89	86		97	92	89	86		91	88	86		90	88	86		89	87	85
9	96	90	87	85		95	90	87	85		89	86	84		89	86	84		88	86	84
10	94	89	85	83		93	88	85	83		88	85	83		87	84	83		87	84	82

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	675604
5°	586395
10°	362340
15°	125858
20°	38643
25°	13670
30°	5064
35°	2034
40°	1088
45°	434
50°	239
55°	268
60°	307
65°	156
70°	192
75°	254
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 434 cd/sqm

TEST NUMBER: P1271194

CATALOG NUMBER: P3AS05R209827DE010 E3CD1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	221.1	50.8
10°-20°	175.4	40.3
20°-30°	30.4	7.0
30°-40°	5.5	1.3
40°-50°	1.3	0.3
50°-60°	0.6	0.1
60°-70°	0.3	0.1
70°-80°	0.3	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	426.9	98.1
0°-40°	432.4	99.4
0°-60°	434.3	99.9
0°-90°	435.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	435.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3081	
5°	2664	221
15°	554	175
25°	56	30
35°	8	6
45°	1	1
55°	1	1
65°	0	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1271194

CATALOG NUMBER: P3AS05R209827DE010 E3CD1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	3081.0
1°	3066.2
2°	3007.7
3°	2913.7
4°	2803.5
5°	2664.0
6°	2504.3
7°	2318.3
8°	2106.6
9°	1868.6
10°	1627.3
12.5°	1026.4
15°	554.4
17.5°	296.1
20°	165.6
22.5°	94.7
25°	56.5
27.5°	34.4
30°	20.0
32.5°	11.7
35°	7.6
37.5°	5.2
40°	3.8
42.5°	2.4
45°	1.4
47.5°	0.7
50°	0.7
52.5°	0.7
55°	0.7
57.5°	0.7
60°	0.7
62.5°	0.3
65°	0.3
67.5°	0.3
70°	0.3
72.5°	0.3
75°	0.3
77.5°	0.3
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)