

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1271352

Luminaire Tested: P3AS05R459827DE010 E3DLD1MW

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1271352  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-26)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS05R459827DE010 E3DLD1MW  
Description: 3in Adjustable LED luminaire with, R45 optic, 2700K CCT AND, 98CRI , E3DLD1MW TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 299.0 lumens  
Efficiency: N/A  
Efficacy: 41.5 lumens/watt  
Spacing Criteria (0/90/45): 0.84 / 0.84 / 0.92  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 7.2  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1271352  
CATALOG NUMBER: P3AS05R459827DE010 E3DLD1MW

### Luminous Intensity Polar Plot

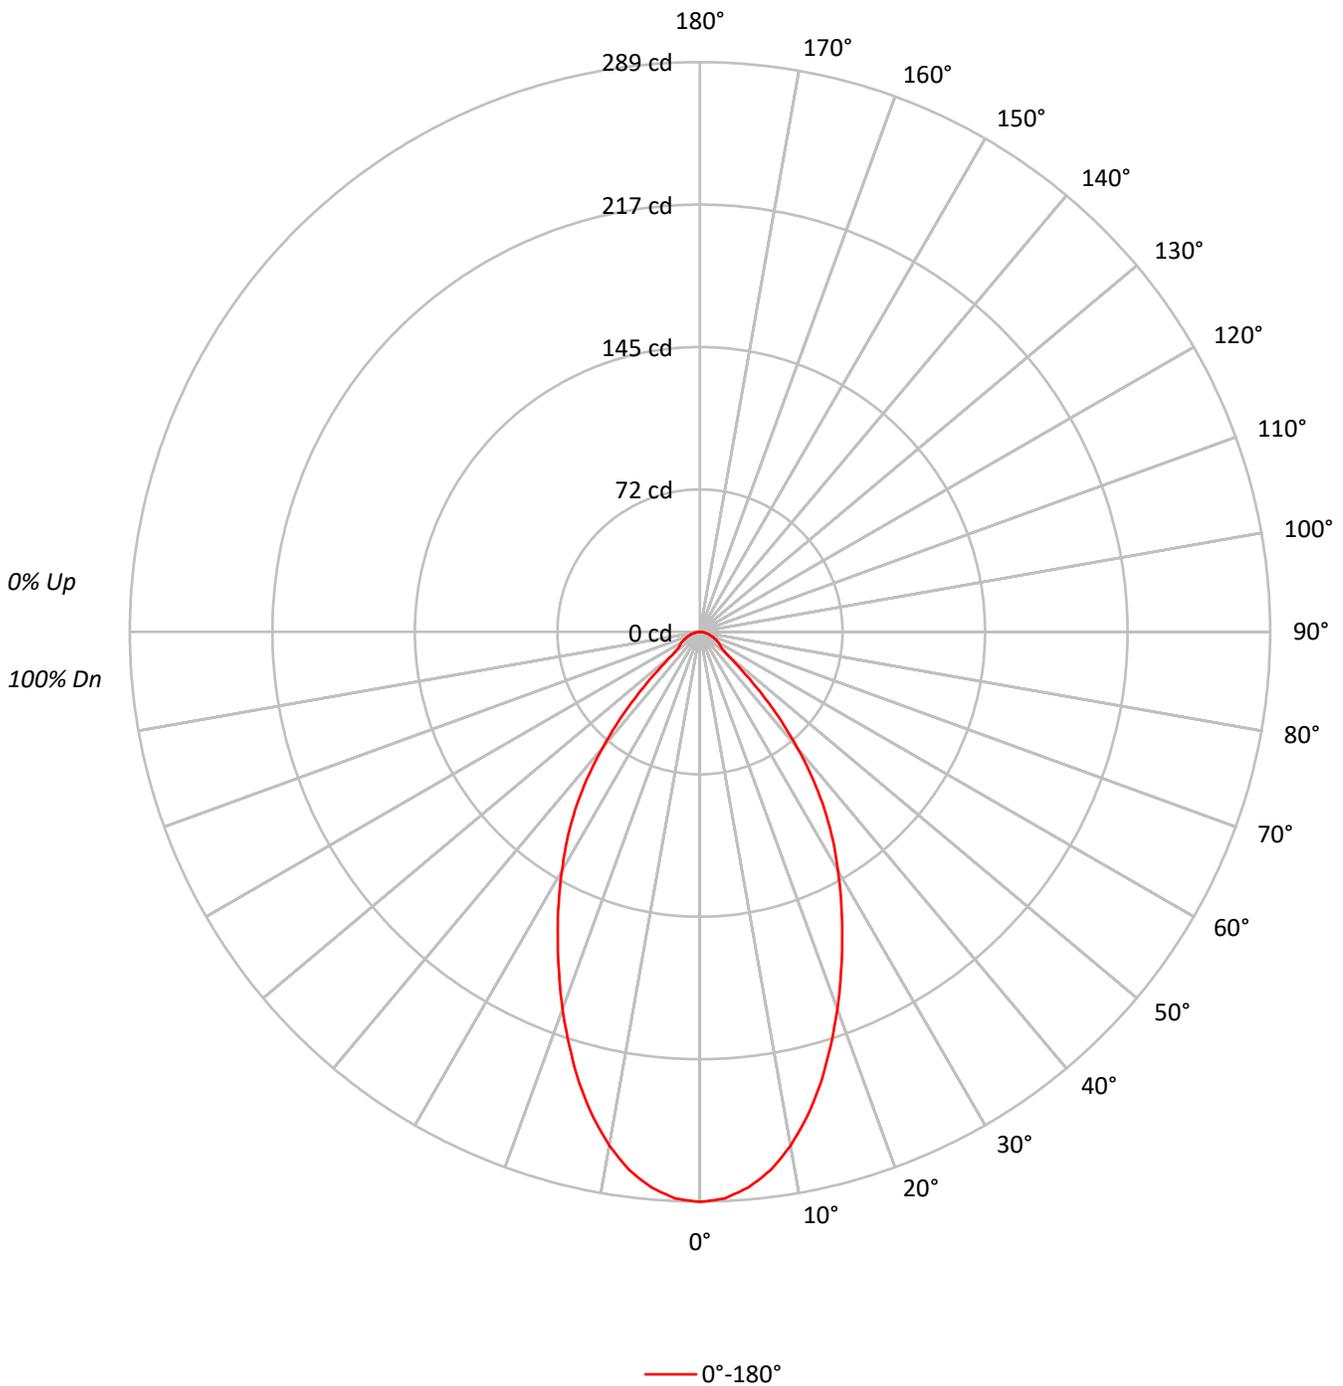



TEST NUMBER: P1271352  
 CATALOG NUMBER: P3AS05R459827DE010 E3DLD1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |    |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|----|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |    |    | 20 |     |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |     | 30  |     |     |     | 10  |     |    |    | 0  |     |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 | 0  |     |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |    |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    |    | 100 |
| 1   | 112 | 109 | 106 | 104 | 110 | 107 | 104 | 102 | 103 | 101 | 99  | 99  | 97  | 96  | 96  | 94  | 93  | 91  |    |    |    | 91  |
| 2   | 106 | 100 | 95  | 91  | 103 | 98  | 94  | 90  | 95  | 91  | 88  | 92  | 89  | 86  | 89  | 87  | 85  | 83  |    |    |    | 83  |
| 3   | 99  | 92  | 86  | 82  | 97  | 90  | 85  | 81  | 88  | 83  | 80  | 85  | 81  | 78  | 83  | 80  | 77  | 75  |    |    |    | 75  |
| 4   | 94  | 85  | 78  | 74  | 92  | 84  | 78  | 73  | 81  | 76  | 72  | 79  | 75  | 71  | 77  | 74  | 71  | 69  |    |    |    | 69  |
| 5   | 88  | 79  | 72  | 67  | 86  | 78  | 71  | 67  | 76  | 70  | 66  | 74  | 69  | 65  | 72  | 68  | 65  | 63  |    |    |    | 63  |
| 6   | 83  | 73  | 66  | 61  | 81  | 72  | 66  | 61  | 71  | 65  | 61  | 69  | 64  | 60  | 68  | 63  | 60  | 58  |    |    |    | 58  |
| 7   | 78  | 68  | 61  | 57  | 77  | 67  | 61  | 56  | 66  | 60  | 56  | 65  | 60  | 56  | 64  | 59  | 55  | 54  |    |    |    | 54  |
| 8   | 74  | 64  | 57  | 52  | 73  | 63  | 57  | 52  | 62  | 56  | 52  | 61  | 56  | 52  | 60  | 55  | 52  | 50  |    |    |    | 50  |
| 9   | 70  | 60  | 53  | 49  | 69  | 59  | 53  | 49  | 58  | 52  | 48  | 57  | 52  | 48  | 56  | 52  | 48  | 47  |    |    |    | 47  |
| 10  | 67  | 56  | 50  | 45  | 66  | 56  | 49  | 45  | 55  | 49  | 45  | 54  | 49  | 45  | 53  | 48  | 45  | 44  |    |    |    | 44  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |       |
|-----|-------|
|     | 0°    |
| 0°  | 63394 |
| 5°  | 62271 |
| 10° | 58917 |
| 15° | 53735 |
| 20° | 47511 |
| 25° | 41277 |
| 30° | 35423 |
| 35° | 29526 |
| 40° | 21984 |
| 45° | 13459 |
| 50° | 6243  |
| 55° | 4855  |
| 60° | 4693  |
| 65° | 4307  |
| 70° | 3975  |
| 75° | 3813  |
| 80° | 3536  |
| 85° | 2516  |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 13459 cd/sqm



TEST NUMBER: P1271352  
 CATALOG NUMBER: P3AS05R459827DE010 E3DLD1MW

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 26.4   | 8.8       |
| 10°-20°   | 65.9   | 22.0      |
| 20°-30°   | 78.3   | 26.2      |
| 30°-40°   | 68.0   | 22.8      |
| 40°-50°   | 34.1   | 11.4      |
| 50°-60°   | 11.8   | 4.0       |
| 60°-70°   | 8.3    | 2.8       |
| 70°-80°   | 4.6    | 1.6       |
| 80°-90°   | 1.4    | 0.5       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 170.6  | 57.1      |
| 0°-40°    | 238.7  | 79.8      |
| 0°-60°    | 284.6  | 95.2      |
| 0°-90°    | 299.0  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 299.0  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°  | Flux |
|-----|-----|------|
| 0°  | 289 |      |
| 5°  | 283 | 26   |
| 15° | 237 | 66   |
| 25° | 171 | 78   |
| 35° | 110 | 68   |
| 45° | 43  | 34   |
| 55° | 13  | 12   |
| 65° | 8   | 8    |
| 75° | 4   | 5    |
| 85° | 1   | 1    |
| 90° | 0   |      |



TEST NUMBER: P1271352  
CATALOG NUMBER: P3AS05R459827DE010 E3DLD1MW

**CANDELA DISTRIBUTION (FULL):**

|       | 0°    |
|-------|-------|
| 0°    | 289.1 |
| 2.5°  | 287.7 |
| 5°    | 282.9 |
| 7.5°  | 275.3 |
| 10°   | 264.6 |
| 12.5° | 251.5 |
| 15°   | 236.7 |
| 17.5° | 220.2 |
| 20°   | 203.6 |
| 22.5° | 186.8 |
| 25°   | 170.6 |
| 27.5° | 155.1 |
| 30°   | 139.9 |
| 32.5° | 125.4 |
| 35°   | 110.3 |
| 37.5° | 94.1  |
| 40°   | 76.8  |
| 42.5° | 60.0  |
| 45°   | 43.4  |
| 47.5° | 28.6  |
| 50°   | 18.3  |
| 52.5° | 14.1  |
| 55°   | 12.7  |
| 57.5° | 11.7  |
| 60°   | 10.7  |
| 62.5° | 9.6   |
| 65°   | 8.3   |
| 67.5° | 7.2   |
| 70°   | 6.2   |
| 72.5° | 5.2   |
| 75°   | 4.5   |
| 77.5° | 3.4   |
| 80°   | 2.8   |
| 82.5° | 2.1   |
| 85°   | 1.0   |
| 87.5° | 0.7   |
| 90°   | 0.0   |

(END OF REPORT)