

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1271417

Luminaire Tested: P3AS05R559827DE010 E3DLP1WH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1271417
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-35)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R559827DE010 E3DLP1WH
Description: 3in Adjustable LED luminaire with, R55 optic, 2700K CCT AND, 98CRI , E3DLP1WH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 376.0 lumens
Efficiency: N/A
Efficacy: 52.2 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.81
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1271417

CATALOG NUMBER: P3AS05R559827DE010 E3DLP1WH

Luminous Intensity Polar Plot

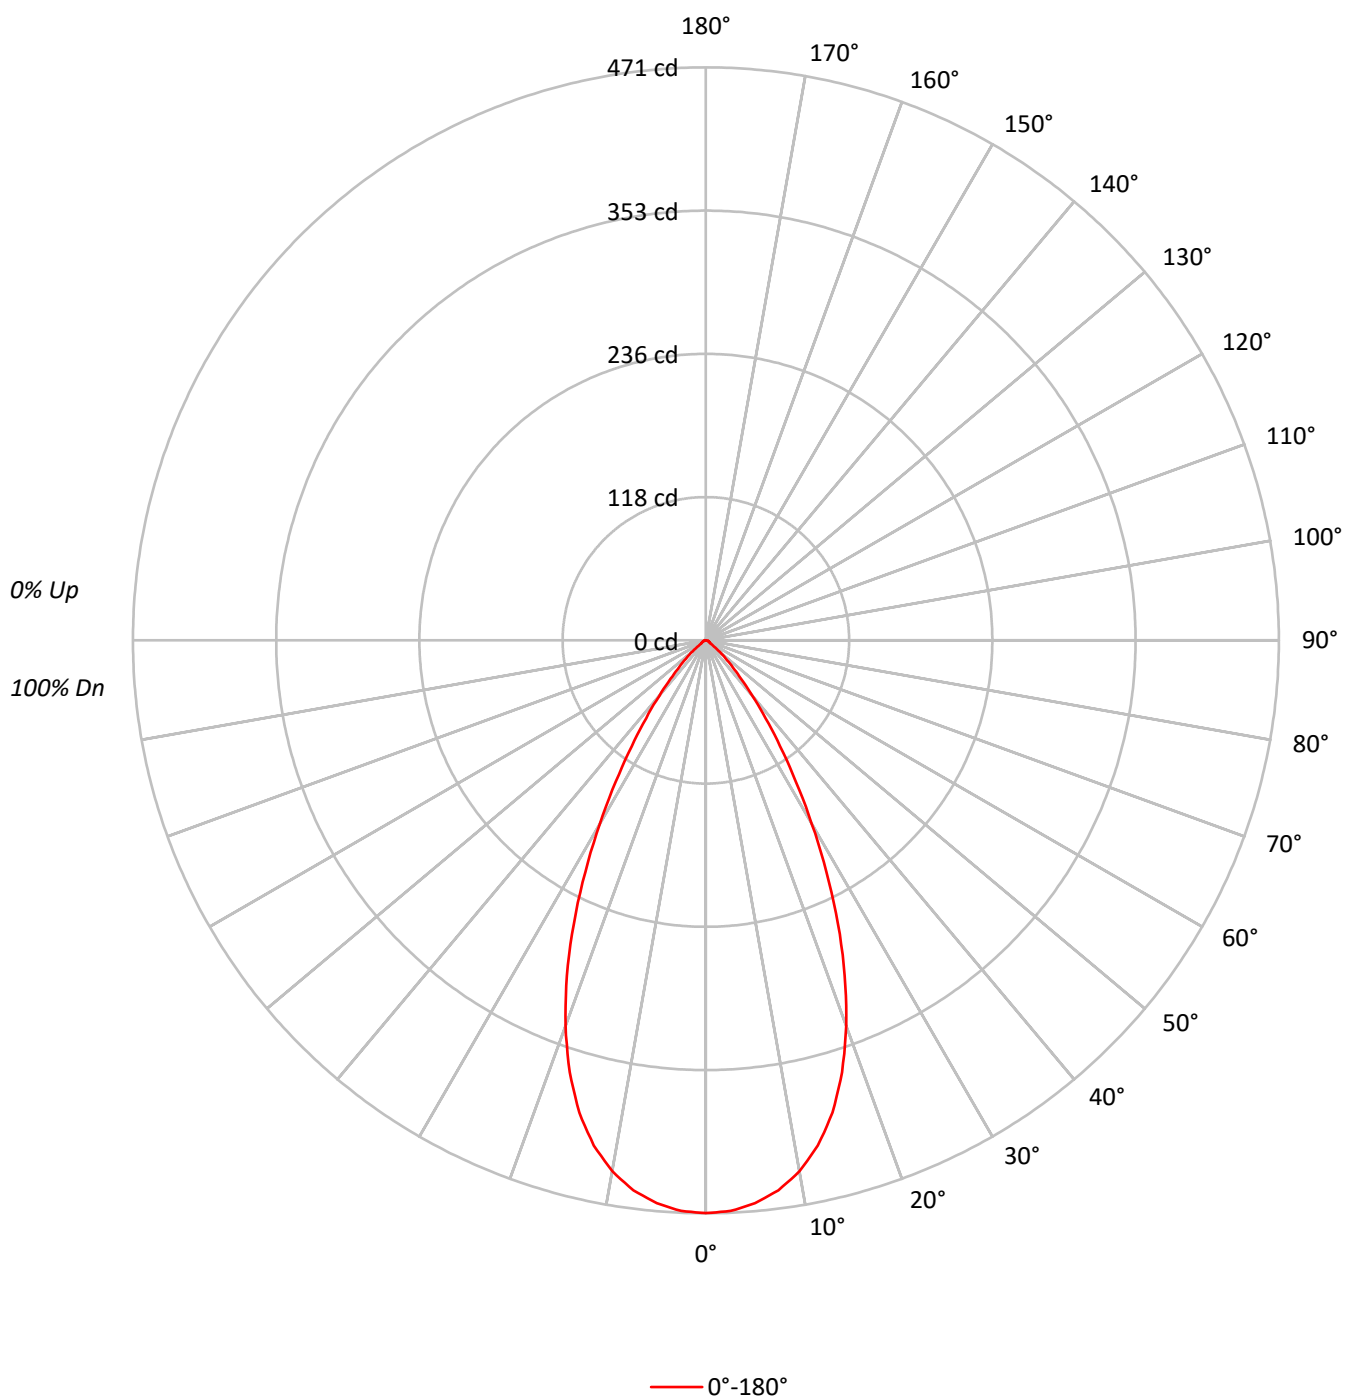

TEST NUMBER: P1271417

CATALOG NUMBER: P3AS05R559827DE010 E3DLP1WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	111	108	106	111	108	106	104	104	103	101		101	99	98		97
2	108	103	99	95	106	101	97	94	98	95	92		95	92	90		92
3	102	96	91	87	100	95	90	86	92	88	85		89	86	84		87
4	97	90	84	80	95	89	83	79	86	82	78		84	81	78		83
5	92	84	78	74	91	83	78	74	81	77	73		80	76	72		78
6	88	79	73	69	86	78	73	68	77	72	68		75	71	68		74
7	84	74	68	64	82	74	68	64	72	67	64		71	67	63		70
8	80	70	64	60	78	70	64	60	69	63	60		68	63	60		67
9	76	66	61	57	75	66	60	56	65	60	56		64	59	56		63
10	73	63	57	53	72	62	57	53	62	57	53		61	56	53		60

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	103237
5°	102201
10°	98684
15°	91238
20°	78734
25°	62181
30°	44108
35°	28429
40°	17089
45°	9613
50°	5185
55°	1835
60°	1667
65°	1608
70°	1539
75°	1440
80°	1263
85°	755

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 9613 cd/sqm

TEST NUMBER: P1271417

CATALOG NUMBER: P3AS05R559827DE010 E3DLP1WH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	43.7	11.6
10°-20°	111.1	29.6
20°-30°	116.5	31.0
30°-40°	67.9	18.1
40°-50°	25.4	6.8
50°-60°	6.0	1.6
60°-70°	3.1	0.8
70°-80°	1.8	0.5
80°-90°	0.5	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	271.3	72.2
0°-40°	339.2	90.2
0°-60°	370.6	98.6
0°-90°	376.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	376.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	471	
5°	464	44
15°	402	111
25°	257	116
35°	106	68
45°	31	25
55°	5	6
65°	3	3
75°	2	2
85°	0	0
90°	0	

TEST NUMBER: P1271417

CATALOG NUMBER: P3AS05R559827DE010 E3DLP1WH

CANDELA DISTRIBUTION (FULL):

	0°
0°	470.8
2.5°	469.5
5°	464.3
7.5°	456.0
10°	443.2
12.5°	425.3
15°	401.9
17.5°	372.2
20°	337.4
22.5°	298.4
25°	257.0
27.5°	214.6
30°	174.2
32.5°	137.6
35°	106.2
37.5°	80.7
40°	59.7
42.5°	42.8
45°	31.0
47.5°	22.4
50°	15.2
52.5°	8.6
55°	4.8
57.5°	4.1
60°	3.8
62.5°	3.4
65°	3.1
67.5°	2.8
70°	2.4
72.5°	2.1
75°	1.7
77.5°	1.4
80°	1.0
82.5°	0.7
85°	0.3
87.5°	0.3
90°	0.0

(END OF REPORT)