

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1271552

Luminaire Tested: P3AS09R209827DE010 E3DLD1LI

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1271552
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-6)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R209827DE010 E3DLD1LI
Description: 3in Adjustable LED luminaire with, R20 optic, 2700K CCT AND, 98CRI , E3DLD1LI TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 401.0 lumens
Efficiency: N/A
Efficacy: 36.5 lumens/watt
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.83
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1271552

CATALOG NUMBER: P3AS09R209827DE010 E3DLD1LI

Luminous Intensity Polar Plot

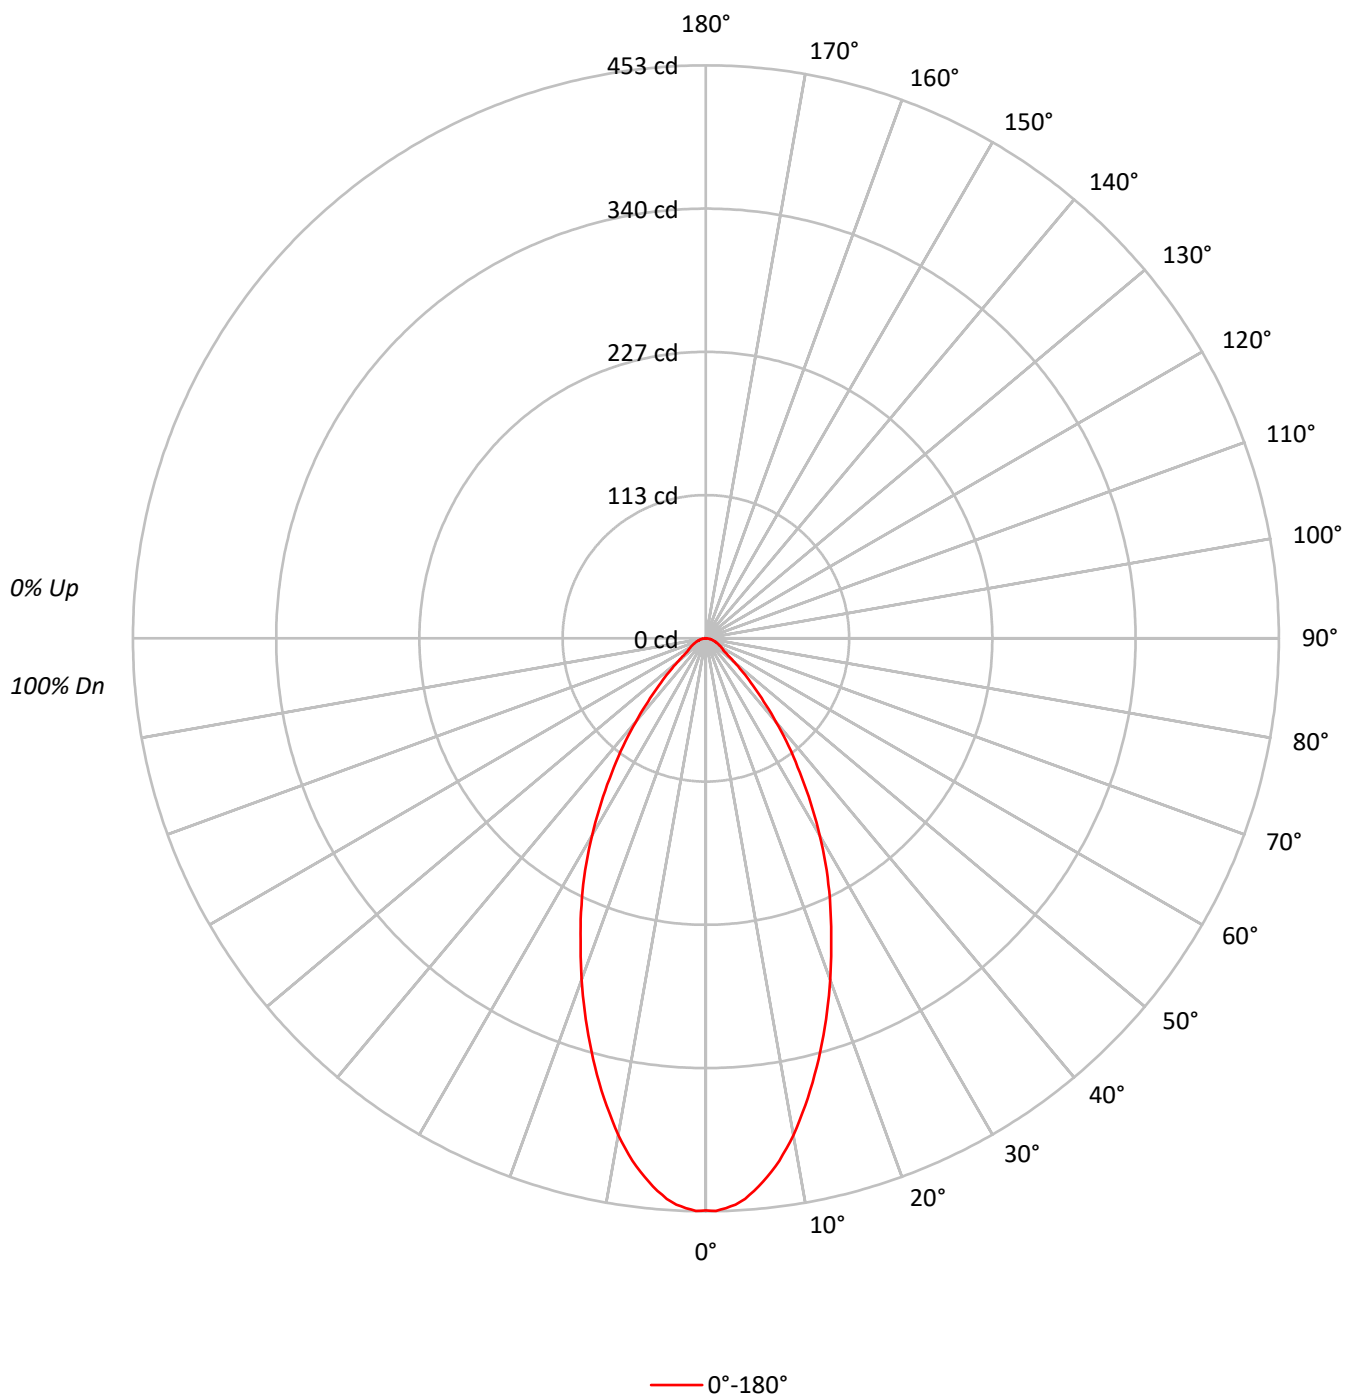

TEST NUMBER: P1271552

CATALOG NUMBER: P3AS09R209827DE010 E3DLD1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	113	109	106	104		110	107	105	102		103	101	99		99	98	96		96	95	93
2	106	100	96	92		104	99	94	91		95	92	89		92	89	87		90	87	85
3	100	93	87	82		98	91	86	82		88	84	80		86	82	79		84	81	78
4	94	86	79	75		92	85	79	74		82	77	73		80	76	72		78	75	72
5	89	80	73	68		87	79	73	68		77	71	67		75	70	67		73	69	66
6	84	74	68	63		82	73	67	63		72	66	62		70	65	62		69	65	61
7	80	69	63	58		78	69	62	58		67	62	58		66	61	57		65	60	57
8	75	65	59	54		74	64	58	54		63	58	54		62	57	53		61	57	53
9	72	61	55	50		70	61	55	50		60	54	50		59	54	50		58	53	50
10	68	58	51	47		67	57	51	47		56	51	47		56	51	47		55	50	47

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	99181
5°	96544
10°	88798
15°	78162
20°	67042
25°	56326
30°	45526
35°	34639
40°	24646
45°	16281
50°	10064
55°	6614
60°	6052
65°	5552
70°	5257
75°	4745
80°	4546
85°	3774

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 16281 cd/sqm

TEST NUMBER: P1271552

CATALOG NUMBER: P3AS09R209827DE010 E3DLD1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	40.6	10.1
10°-20°	95.9	23.9
20°-30°	106.4	26.5
30°-40°	81.2	20.2
40°-50°	41.6	10.4
50°-60°	17.1	4.3
60°-70°	10.7	2.7
70°-80°	6.0	1.5
80°-90°	1.7	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	242.8	60.6
0°-40°	324.0	80.8
0°-60°	382.6	95.4
0°-90°	401.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	401.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	452	
5°	439	41
15°	344	96
25°	233	106
35°	129	81
45°	52	42
55°	17	17
65°	11	11
75°	6	6
85°	2	2
90°	0	

TEST NUMBER: P1271552

CATALOG NUMBER: P3AS09R209827DE010 E3DLD1LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	452.3
1°	452.8
2°	450.8
3°	448.3
4°	444.2
5°	438.6
6°	432.0
7°	424.8
8°	417.2
9°	408.0
10°	398.8
12.5°	372.4
15°	344.3
17.5°	315.8
20°	287.3
22.5°	258.8
25°	232.8
27.5°	206.8
30°	179.8
32.5°	154.3
35°	129.4
37.5°	107.5
40°	86.1
42.5°	67.7
45°	52.5
47.5°	39.7
50°	29.5
52.5°	21.9
55°	17.3
57.5°	15.8
60°	13.8
62.5°	12.2
65°	10.7
67.5°	9.2
70°	8.2
72.5°	6.6
75°	5.6
77.5°	4.6
80°	3.6
82.5°	2.5
85°	1.5
87.5°	0.5
90°	0.0

(END OF REPORT)