

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1271584

Luminaire Tested: P3AS09R259827DE010 E3DLP1H

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1271584
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-9)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R259827DE010 E3DLP1H
Description: 3in Adjustable LED luminaire with, R25 optic, 2700K CCT AND, 98CRI , E3DLP1H TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 327.0 lumens
Efficiency: N/A
Efficacy: 29.7 lumens/watt
Spacing Criteria (0/90/45): 0.62 / 0.62 / 0.68
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1271584
CATALOG NUMBER: P3AS09R259827DE010 E3DLP1H

Luminous Intensity Polar Plot

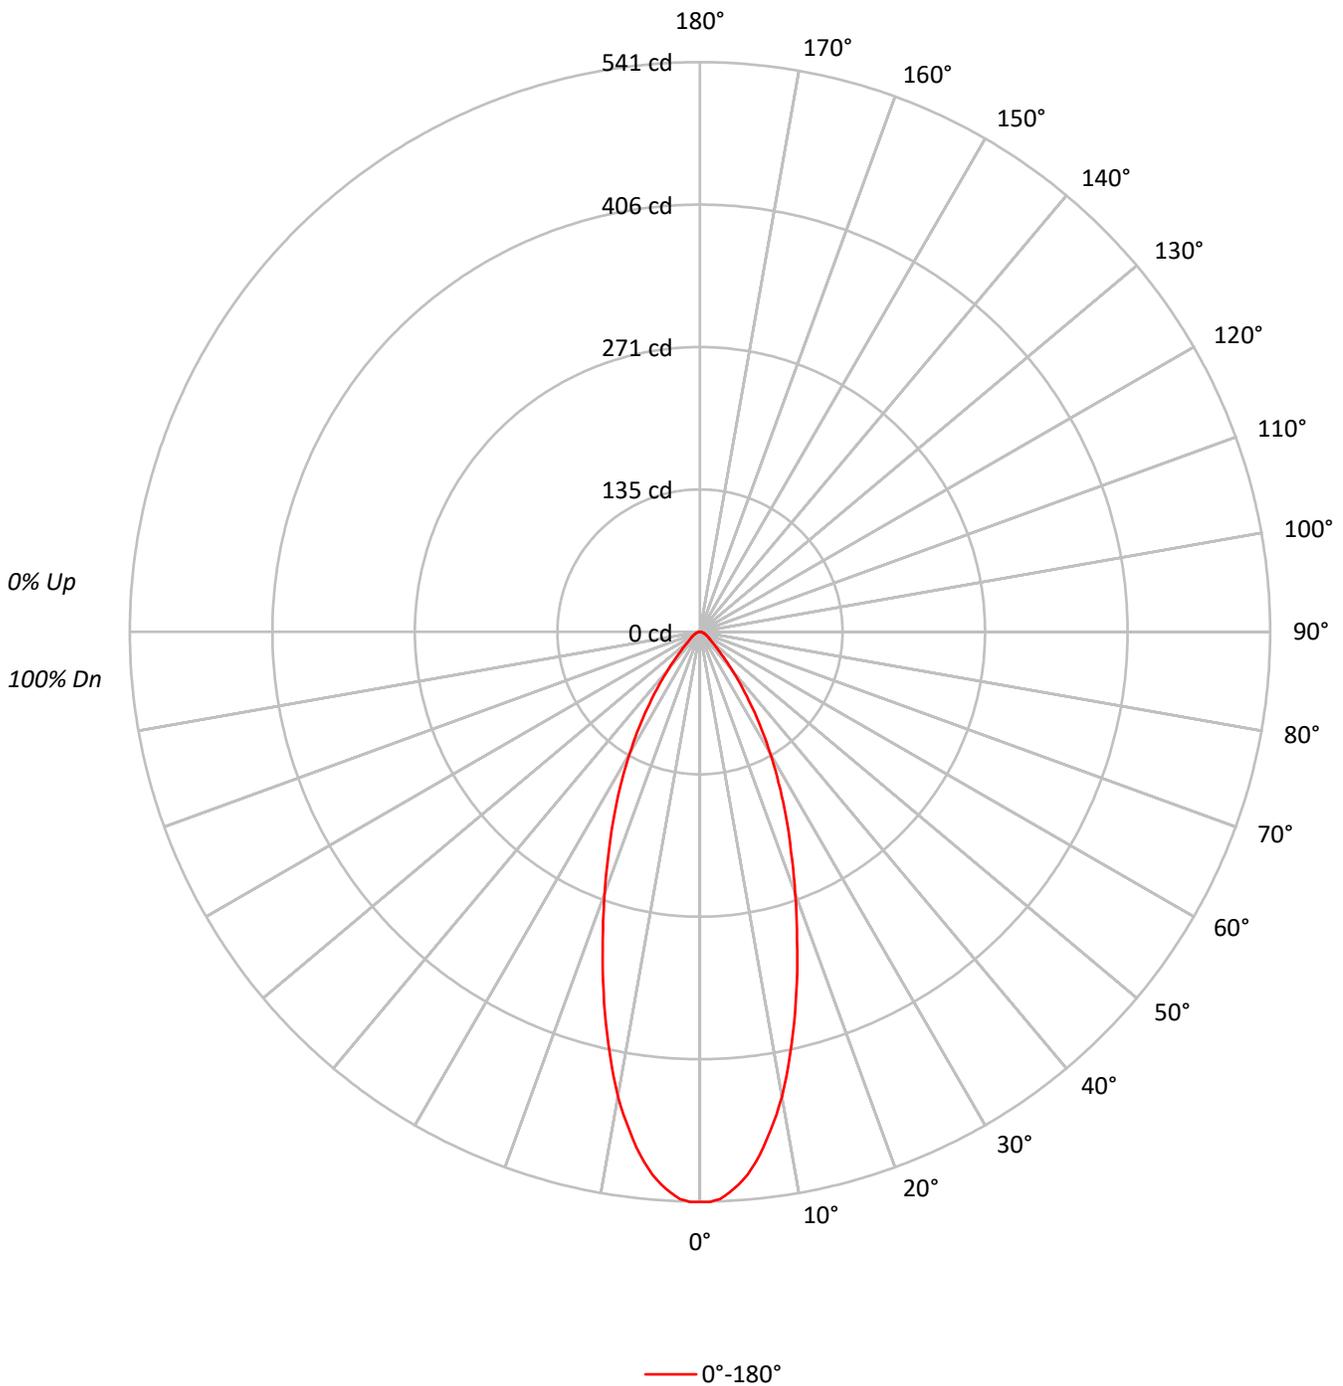



TEST NUMBER: P1271584
 CATALOG NUMBER: P3AS09R259827DE010 E3DLP1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	108	105	111	108	106	104	104	102	101	100	99	98	97	96	95	93	93	93	93
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86	86	86	86
3	102	95	90	86	100	94	89	86	91	87	84	89	86	83	87	84	82	80	80	80	80
4	97	89	84	79	95	88	83	79	86	81	78	84	80	77	82	79	76	75	75	75	75
5	92	84	78	74	91	83	77	73	81	76	73	79	75	72	78	74	71	70	70	70	70
6	88	79	73	69	86	78	72	68	77	72	68	75	71	67	74	70	67	66	66	66	66
7	84	74	68	64	82	74	68	64	72	67	64	71	67	63	70	66	63	62	62	62	62
8	80	70	65	60	79	70	64	60	69	64	60	68	63	60	67	63	60	58	58	58	58
9	76	67	61	57	75	66	61	57	65	60	57	65	60	57	64	59	56	55	55	55	55
10	73	64	58	54	72	63	58	54	62	57	54	62	57	54	61	57	54	52	52	52	52

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	118719
5°	113889
10°	99775
15°	80205
20°	61629
25°	46624
30°	33701
35°	22379
40°	13568
45°	7908
50°	5049
55°	4091
60°	3596
65°	3165
70°	2629
75°	2626
80°	1894
85°	2516

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 7908 cd/sqm



TEST NUMBER: P1271584
 CATALOG NUMBER: P3AS09R259827DE010 E3DLP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	47.1	14.4
10°-20°	97.7	29.9
20°-30°	88.3	27.0
30°-40°	53.1	16.2
40°-50°	21.1	6.5
50°-60°	9.7	3.0
60°-70°	5.9	1.8
70°-80°	3.2	1.0
80°-90°	0.9	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	233.1	71.3
0°-40°	286.2	87.5
0°-60°	317.0	97.0
0°-90°	327.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	327.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	541	
5°	517	47
15°	353	98
25°	193	88
35°	84	53
45°	26	21
55°	11	10
65°	6	6
75°	3	3
85°	1	1
90°	0	



TEST NUMBER: P1271584
CATALOG NUMBER: P3AS09R259827DE010 E3DLP1H

CANDELA DISTRIBUTION (FULL):

0°	
0°	541.4
1°	541.4
2°	538.9
3°	533.2
4°	526.1
5°	517.4
6°	506.2
7°	493.5
8°	478.7
9°	463.9
10°	448.1
11°	429.8
12°	410.9
13°	392.0
14°	373.2
15°	353.3
17.5°	306.4
20°	264.1
22.5°	225.8
25°	192.7
27.5°	161.6
30°	133.1
32.5°	107.1
35°	83.6
37.5°	63.7
40°	47.4
42.5°	34.7
45°	25.5
47.5°	19.4
50°	14.8
52.5°	12.2
55°	10.7
57.5°	9.2
60°	8.2
62.5°	6.6
65°	6.1
67.5°	5.1
70°	4.1
72.5°	3.6
75°	3.1
77.5°	2.5
80°	1.5
82.5°	1.0
85°	1.0
87.5°	0.5



TEST NUMBER: P1271584
CATALOG NUMBER: P3AS09R259827DE010 E3DLP1H

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)