

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1271683

Luminaire Tested: P3AS09R459827DE010 E3CB1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1271683
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-28)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R459827DE010 E3CB1MW
Description: 3in Adjustable LED luminaire with, R45 optic, 2700K CCT AND, 98CRI , E3CB1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 682.9 lumens
Efficiency: N/A
Efficacy: 62.1 lumens/watt
Spacing Criteria (0/90/45): 0.72 / 0.72 / 0.66
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1271683

CATALOG NUMBER: P3AS09R459827DE010 E3CB1MW

Luminous Intensity Polar Plot

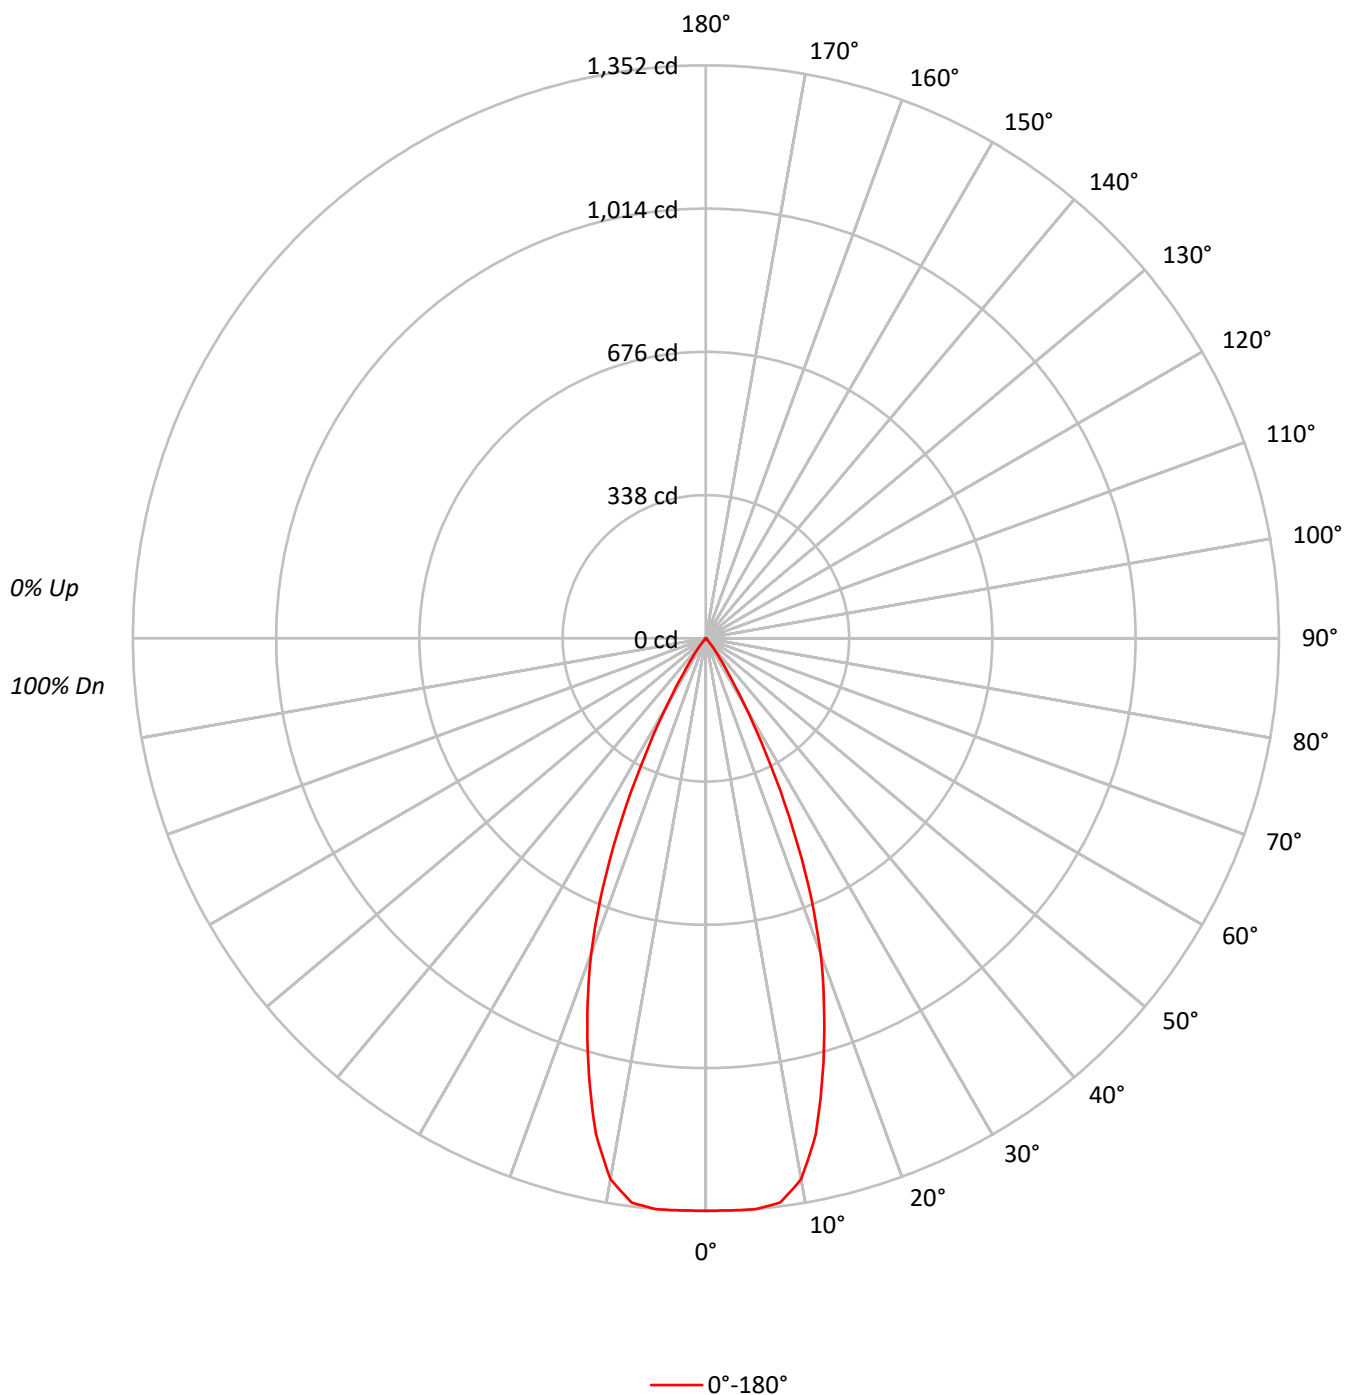

TEST NUMBER: P1271683

CATALOG NUMBER: P3AS09R459827DE010 E3CB1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95		
2	110	106	102	100	108	104	101	98	101	98	96	98	96	94	95	94	92	91		
3	106	100	96	93	104	99	95	92	96	93	91	94	91	89	92	90	88	87		
4	102	95	91	87	100	94	90	87	92	89	86	90	87	85	88	86	84	83		
5	98	91	86	82	96	90	85	82	88	84	81	87	83	81	85	82	80	79		
6	94	87	82	78	93	86	81	78	85	80	77	83	80	77	82	79	76	75		
7	90	83	78	74	89	82	78	74	81	77	74	80	76	74	79	76	73	72		
8	87	79	74	71	86	79	74	71	78	74	71	77	73	70	76	73	70	69		
9	84	76	71	68	83	76	71	68	75	71	68	74	70	67	73	70	67	66		
10	81	73	68	65	80	73	68	65	72	68	65	71	67	65	71	67	65	64		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	296117
5°	297688
10°	288550
15°	241795
20°	184839
25°	112531
30°	46817
35°	14991
40°	4666
45°	961
50°	682
55°	765
60°	658
65°	778
70°	641
75°	847
80°	631
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 961 cd/sqm

TEST NUMBER: P1271683

CATALOG NUMBER: P3AS09R459827DE010 E3CB1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	127.5	18.7
10°-20°	292.7	42.9
20°-30°	210.8	30.9
30°-40°	43.8	6.4
40°-50°	4.0	0.6
50°-60°	1.6	0.2
60°-70°	1.3	0.2
70°-80°	0.9	0.1
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	631.1	92.4
0°-40°	674.9	98.8
0°-60°	680.6	99.7
0°-90°	682.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	682.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1350	
5°	1352	128
15°	1065	293
25°	465	211
35°	56	44
45°	3	4
55°	2	2
65°	2	1
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1271683

CATALOG NUMBER: P3AS09R459827DE010 E3CB1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	1350.4
2.5°	1350.9
5°	1352.4
7.5°	1342.8
10°	1295.9
12.5°	1198.1
15°	1065.1
17.5°	929.1
20°	792.1
22.5°	634.7
25°	465.1
27.5°	306.7
30°	184.9
32.5°	103.4
35°	56.0
37.5°	31.6
40°	16.3
42.5°	7.1
45°	3.1
47.5°	2.0
50°	2.0
52.5°	2.0
55°	2.0
57.5°	1.5
60°	1.5
62.5°	1.5
65°	1.5
67.5°	1.0
70°	1.0
72.5°	1.0
75°	1.0
77.5°	0.5
80°	0.5
82.5°	0.5
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)