

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1271718

Luminaire Tested: P3AS09R509827DE010 E3DL1H

Issue Date: 1/30/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1271718  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-31)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS09R509827DE010 E3DL1H  
Description: 3in Adjustable LED luminaire with, R50 optic, 2700K CCT AND, 98CRI , E3DL1H TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 573.0 lumens  
Efficiency: N/A  
Efficacy: 52.1 lumens/watt  
Spacing Criteria (0/90/45): 0.77 / 0.77 / 0.75  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 11  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1271718

CATALOG NUMBER: P3AS09R509827DE010 E3DL1H

### Luminous Intensity Polar Plot

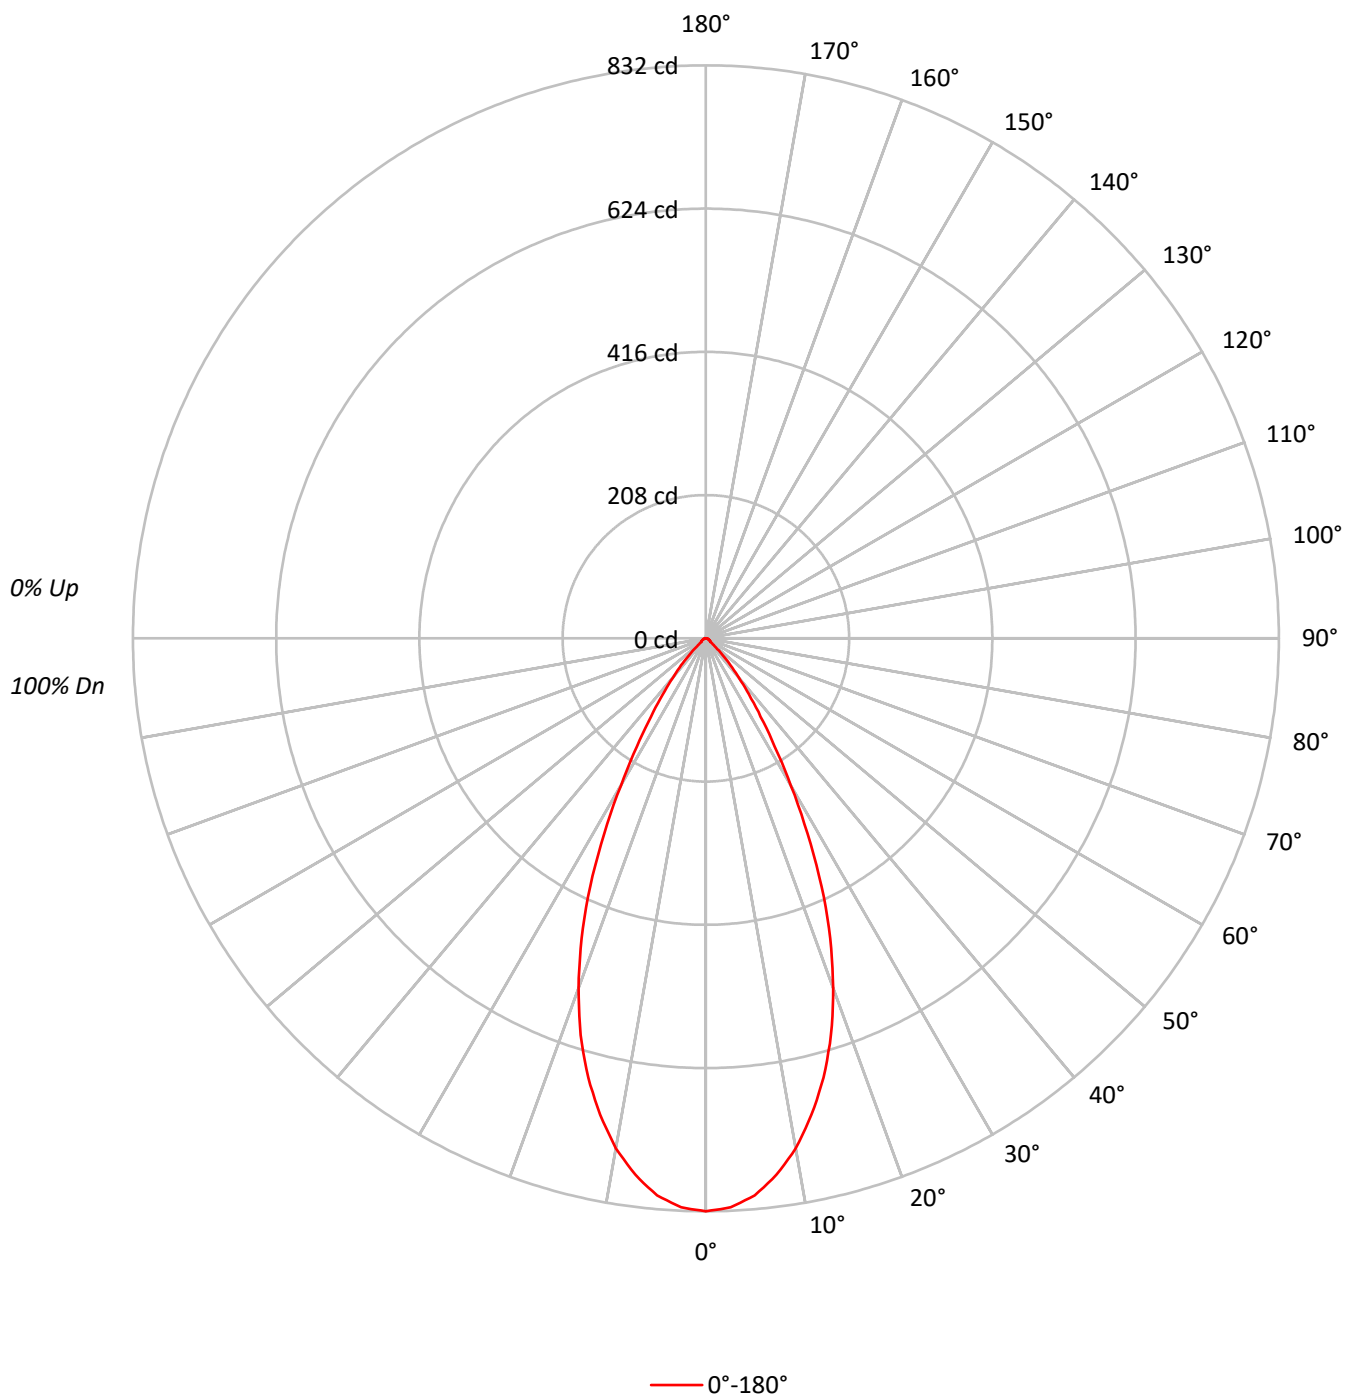

TEST NUMBER: P1271718

CATALOG NUMBER: P3AS09R509827DE010 E3DL1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |  |  |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|--|-----|
| RF  | 20  |     |     |     | 20  |     |     |     |     | 20  |     |     |     |     | 20  |     |     |  |  | 20  |
| RC  | 80  |     |     |     | 70  |     |     |     |     | 30  |     |     |     |     | 10  |     |     |  |  | 0   |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  |  |  | 0   |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |  |  |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 |  |  | 100 |
| 1   | 114 | 111 | 108 | 106 | 111 | 109 | 106 | 104 | 105 | 103 | 101 | 101 | 99  | 98  | 97  | 96  | 95  |  |  | 94  |
| 2   | 108 | 103 | 99  | 96  | 106 | 102 | 98  | 95  | 98  | 95  | 93  | 95  | 93  | 91  | 93  | 91  | 89  |  |  | 87  |
| 3   | 103 | 97  | 92  | 88  | 101 | 95  | 91  | 87  | 93  | 89  | 86  | 90  | 87  | 84  | 88  | 85  | 83  |  |  | 82  |
| 4   | 98  | 91  | 85  | 81  | 96  | 90  | 85  | 81  | 87  | 83  | 80  | 85  | 82  | 79  | 84  | 80  | 78  |  |  | 76  |
| 5   | 93  | 85  | 80  | 75  | 92  | 84  | 79  | 75  | 83  | 78  | 74  | 81  | 77  | 74  | 79  | 76  | 73  |  |  | 72  |
| 6   | 89  | 80  | 75  | 71  | 88  | 80  | 74  | 70  | 78  | 73  | 70  | 77  | 73  | 69  | 75  | 72  | 69  |  |  | 67  |
| 7   | 85  | 76  | 70  | 66  | 84  | 75  | 70  | 66  | 74  | 69  | 66  | 73  | 69  | 65  | 72  | 68  | 65  |  |  | 64  |
| 8   | 81  | 72  | 66  | 62  | 80  | 71  | 66  | 62  | 70  | 65  | 62  | 69  | 65  | 62  | 68  | 64  | 61  |  |  | 60  |
| 9   | 78  | 68  | 63  | 59  | 76  | 68  | 62  | 59  | 67  | 62  | 59  | 66  | 62  | 58  | 65  | 61  | 58  |  |  | 57  |
| 10  | 74  | 65  | 59  | 56  | 73  | 65  | 59  | 56  | 64  | 59  | 55  | 63  | 58  | 55  | 62  | 58  | 55  |  |  | 54  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 182442 |
| 5°  | 178758 |
| 10° | 167443 |
| 15° | 149899 |
| 20° | 126128 |
| 25° | 96272  |
| 30° | 62567  |
| 35° | 37102  |
| 40° | 21440  |
| 45° | 10730  |
| 50° | 3991   |
| 55° | 3135   |
| 60° | 2895   |
| 65° | 2646   |
| 70° | 2629   |
| 75° | 2626   |
| 80° | 2526   |
| 85° | 2516   |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 10730 cd/sqm

TEST NUMBER: P1271718

CATALOG NUMBER: P3AS09R509827DE010 E3DL1H

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 75.6   | 13.2      |
| 10°-20°   | 182.6  | 31.9      |
| 20°-30°   | 179.1  | 31.3      |
| 30°-40°   | 90.3   | 15.8      |
| 40°-50°   | 28.5   | 5.0       |
| 50°-60°   | 7.4    | 1.3       |
| 60°-70°   | 5.2    | 0.9       |
| 70°-80°   | 3.2    | 0.6       |
| 80°-90°   | 1.1    | 0.2       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| <hr/>     |        |           |
| 0°-30°    | 437.3  | 76.3      |
| 0°-40°    | 527.5  | 92.1      |
| 0°-60°    | 563.5  | 98.3      |
| 0°-90°    | 573.0  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 573.0  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°  | Flux |
|-----|-----|------|
| 0°  | 832 |      |
| 5°  | 812 | 76   |
| 15° | 660 | 183  |
| 25° | 398 | 179  |
| 35° | 139 | 90   |
| 45° | 35  | 29   |
| 55° | 8   | 7    |
| 65° | 5   | 5    |
| 75° | 3   | 3    |
| 85° | 1   | 1    |
| 90° | 0   |      |

TEST NUMBER: P1271718

CATALOG NUMBER: P3AS09R509827DE010 E3DL1H

**CANDELA DISTRIBUTION (FULL):**

| 0°    |       |
|-------|-------|
| 0°    | 832.0 |
| 2.5°  | 826.9 |
| 5°    | 812.1 |
| 7.5°  | 785.6 |
| 10°   | 752.0 |
| 12.5° | 708.7 |
| 15°   | 660.3 |
| 17.5° | 604.2 |
| 20°   | 540.5 |
| 22.5° | 471.8 |
| 25°   | 397.9 |
| 27.5° | 319.4 |
| 30°   | 247.1 |
| 32.5° | 186.0 |
| 35°   | 138.6 |
| 37.5° | 102.4 |
| 40°   | 74.9  |
| 42.5° | 53.0  |
| 45°   | 34.6  |
| 47.5° | 19.9  |
| 50°   | 11.7  |
| 52.5° | 8.7   |
| 55°   | 8.2   |
| 57.5° | 7.1   |
| 60°   | 6.6   |
| 62.5° | 6.1   |
| 65°   | 5.1   |
| 67.5° | 4.6   |
| 70°   | 4.1   |
| 72.5° | 3.6   |
| 75°   | 3.1   |
| 77.5° | 2.5   |
| 80°   | 2.0   |
| 82.5° | 1.5   |
| 85°   | 1.0   |
| 87.5° | 0.5   |
| 90°   | 0.0   |

(END OF REPORT)