

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1271722

Luminaire Tested: P3AS09R509827DE010 E3DL1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1271722
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-31)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R509827DE010 E3DL1WMH
Description: 3in Adjustable LED luminaire with, R50 optic, 2700K CCT AND, 98CRI , E3DL1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 573.0 lumens
Efficiency: N/A
Efficacy: 52.1 lumens/watt
Spacing Criteria (0/90/45): 0.77 / 0.77 / 0.75
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1271722

CATALOG NUMBER: P3AS09R509827DE010 E3DL1WMH

Luminous Intensity Polar Plot

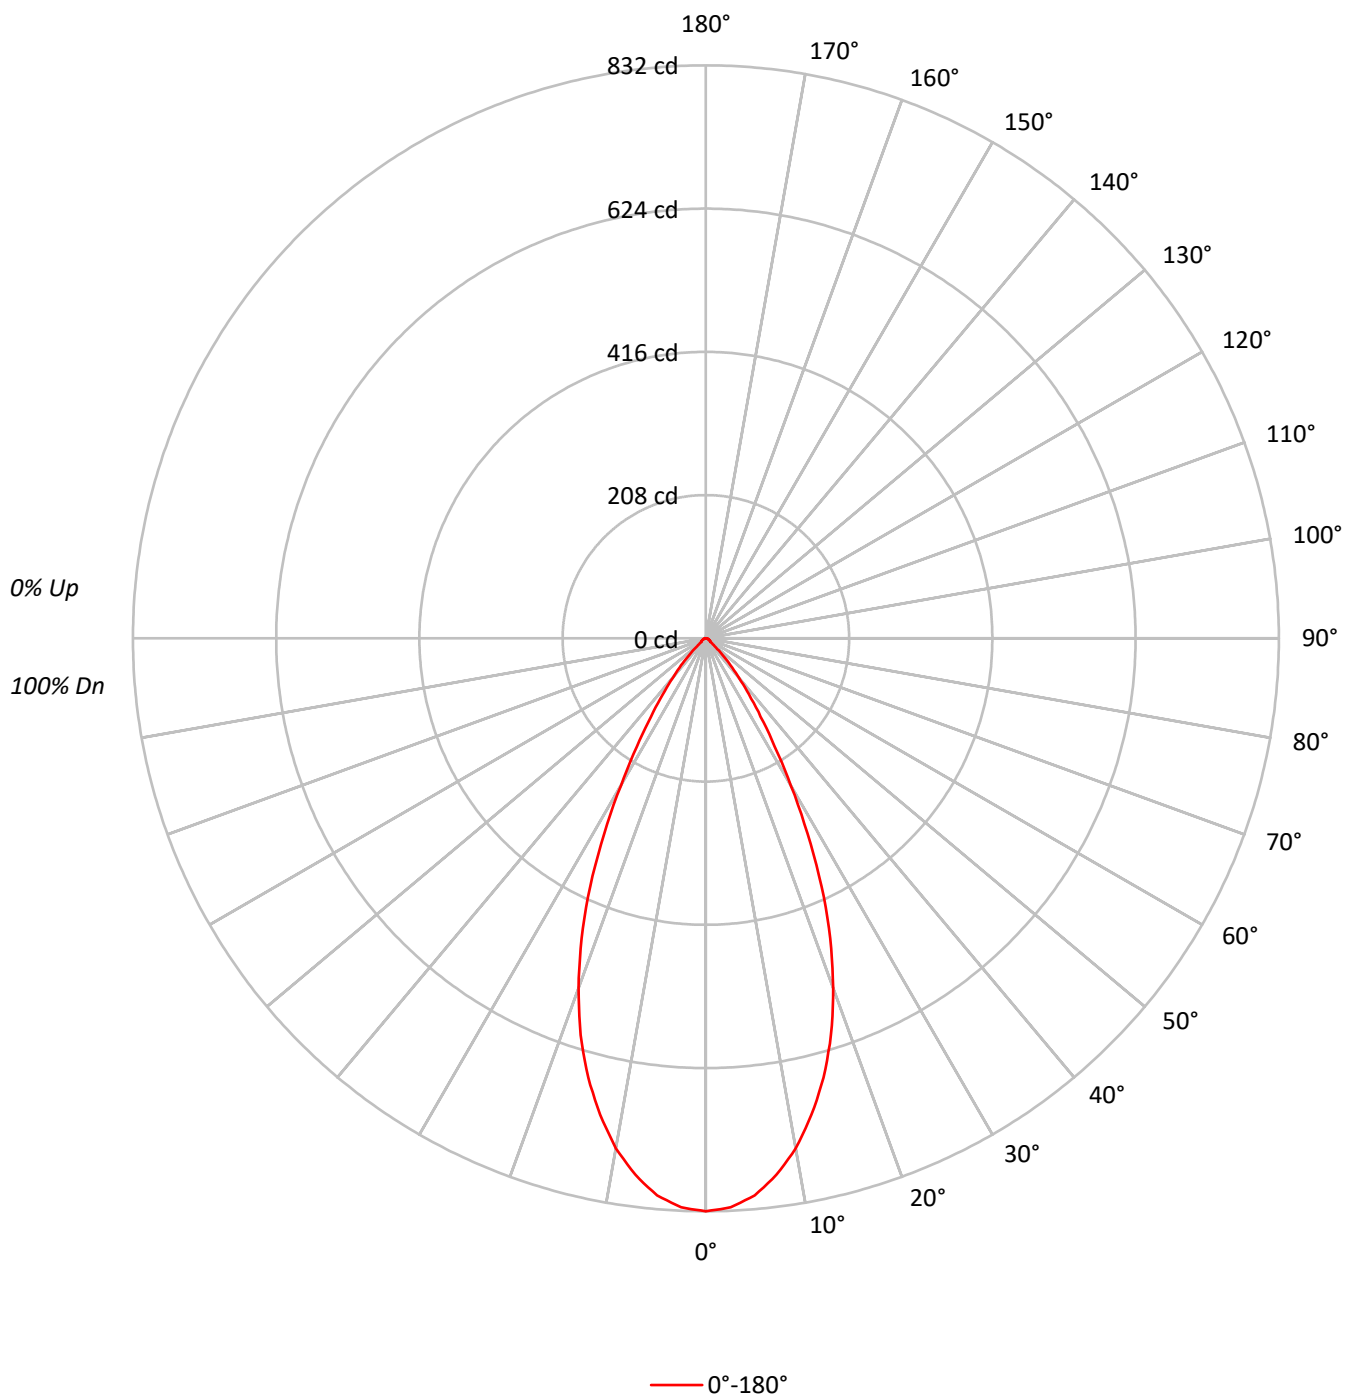

TEST NUMBER: P1271722

CATALOG NUMBER: P3AS09R509827DE010 E3DL1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	111	108	106	111	109	106	104	105	103	101		101	99	98		97
2	108	103	99	96	106	102	98	95	98	95	93		95	93	91		93
3	103	97	92	88	101	95	91	87	93	89	86		90	87	84		88
4	98	91	85	81	96	90	85	81	87	83	80		85	82	79		84
5	93	85	80	75	92	84	79	75	83	78	74		81	77	74		79
6	89	80	75	71	88	80	74	70	78	73	70		77	73	69		75
7	85	76	70	66	84	75	70	66	74	69	66		73	69	65		72
8	81	72	66	62	80	71	66	62	70	65	62		69	65	62		68
9	78	68	63	59	76	68	62	59	67	62	59		66	62	58		65
10	74	65	59	56	73	65	59	56	64	59	55		63	58	55		62

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	182442
5°	178758
10°	167443
15°	149899
20°	126128
25°	96272
30°	62567
35°	37102
40°	21440
45°	10730
50°	3991
55°	3135
60°	2895
65°	2646
70°	2629
75°	2626
80°	2526
85°	2516

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 10730 cd/sqm

TEST NUMBER: P1271722

CATALOG NUMBER: P3AS09R509827DE010 E3DL1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	75.6	13.2
10°-20°	182.6	31.9
20°-30°	179.1	31.3
30°-40°	90.3	15.8
40°-50°	28.5	5.0
50°-60°	7.4	1.3
60°-70°	5.2	0.9
70°-80°	3.2	0.6
80°-90°	1.1	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	437.3	76.3
0°-40°	527.5	92.1
0°-60°	563.5	98.3
0°-90°	573.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	573.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	832	
5°	812	76
15°	660	183
25°	398	179
35°	139	90
45°	35	29
55°	8	7
65°	5	5
75°	3	3
85°	1	1
90°	0	

TEST NUMBER: P1271722

CATALOG NUMBER: P3AS09R509827DE010 E3DL1WMH

CANDELA DISTRIBUTION (FULL):

	0°
0°	832.0
2.5°	826.9
5°	812.1
7.5°	785.6
10°	752.0
12.5°	708.7
15°	660.3
17.5°	604.2
20°	540.5
22.5°	471.8
25°	397.9
27.5°	319.4
30°	247.1
32.5°	186.0
35°	138.6
37.5°	102.4
40°	74.9
42.5°	53.0
45°	34.6
47.5°	19.9
50°	11.7
52.5°	8.7
55°	8.2
57.5°	7.1
60°	6.6
62.5°	6.1
65°	5.1
67.5°	4.6
70°	4.1
72.5°	3.6
75°	3.1
77.5°	2.5
80°	2.0
82.5°	1.5
85°	1.0
87.5°	0.5
90°	0.0

(END OF REPORT)