

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1271742

Luminaire Tested: P3AS09R559827DE010 E3D1LI

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1271742
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-14)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R559827DE010 E3D1LI
Description: 3in Adjustable LED luminaire with, R55 optic, 2700K CCT AND, 98CRI , E3D1LI TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 656.9 lumens
Efficiency: N/A
Efficacy: 59.7 lumens/watt
Spacing Criteria (0/90/45): 0.93 / 0.93 / 0.82
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1271742

CATALOG NUMBER: P3AS09R559827DE010 E3D1LI

Luminous Intensity Polar Plot

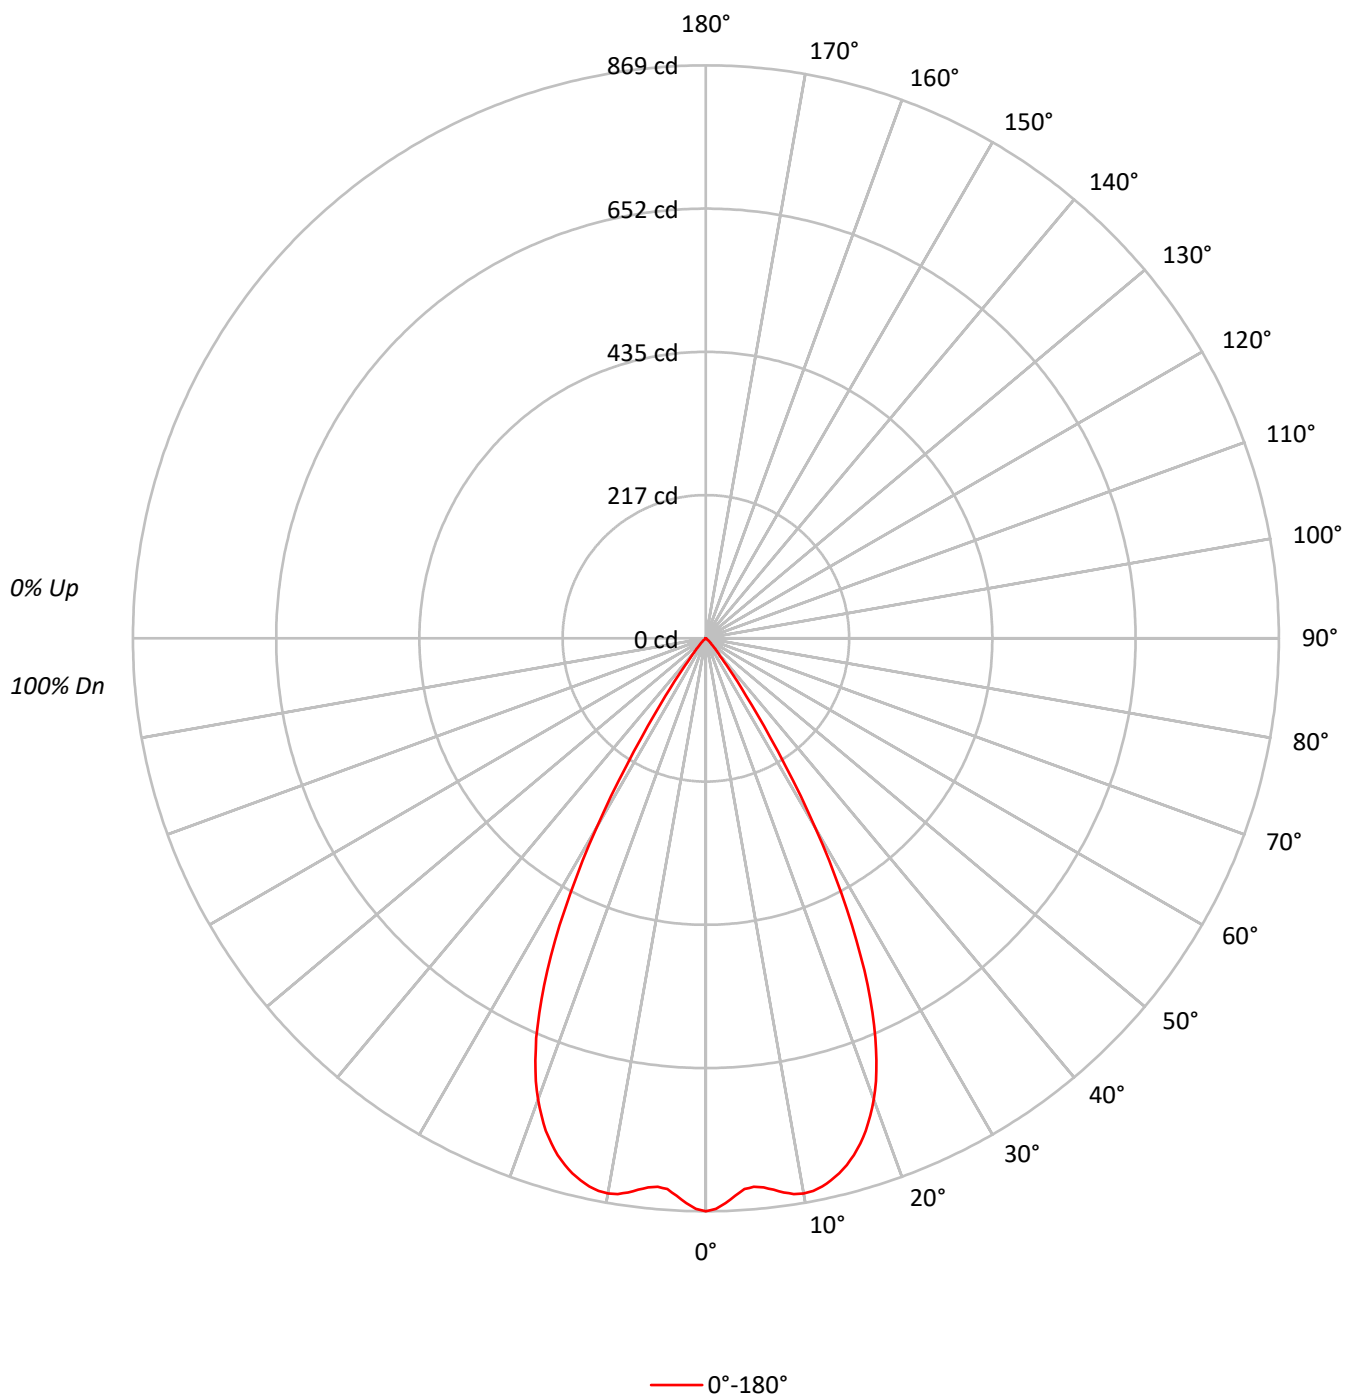

TEST NUMBER: P1271742

CATALOG NUMBER: P3AS09R559827DE010 E3D1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	111	109	107	112	109	107	105	105	104	102		102	100	99		98
2	109	105	101	98	107	103	100	97	100	97	95		97	95	93		94
3	104	98	94	90	102	97	93	90	95	91	88		92	89	87		90
4	100	93	88	84	98	92	87	84	90	86	83		88	84	82		86
5	95	88	83	79	94	87	82	78	85	81	78		84	80	77		82
6	91	83	78	74	90	82	77	74	81	76	73		80	76	73		78
7	87	79	73	70	86	78	73	69	77	72	69		76	72	69		75
8	83	75	69	66	82	74	69	66	73	69	65		72	68	65		71
9	80	71	66	62	79	71	66	62	70	65	62		69	65	62		68
10	77	68	62	59	76	67	62	59	67	62	59		66	62	59		65

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	190533
5°	183777
10°	190355
15°	187674
20°	173685
25°	140476
30°	84190
35°	28536
40°	7872
45°	3473
50°	1023
55°	191
60°	88
65°	104
70°	128
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3473 cd/sqm

TEST NUMBER: P1271742

CATALOG NUMBER: P3AS09R559827DE010 E3D1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	80.8	12.3
10°-20°	230.2	35.0
20°-30°	255.8	38.9
30°-40°	79.6	12.1
40°-50°	9.6	1.5
50°-60°	0.7	0.1
60°-70°	0.2	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	566.8	86.3
0°-40°	646.4	98.4
0°-60°	656.7	100.0
0°-90°	656.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	656.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	869	
5°	835	81
15°	827	230
25°	581	256
35°	107	80
45°	11	10
55°	0	1
65°	0	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1271742

CATALOG NUMBER: P3AS09R559827DE010 E3D1LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	868.9
1°	865.6
2°	857.1
3°	846.6
4°	837.2
5°	834.9
6°	837.4
7°	842.6
8°	848.6
9°	853.4
10°	854.9
11°	853.9
12°	849.9
13°	843.6
14°	836.4
15°	826.7
16°	815.4
17°	801.2
18°	785.2
19°	766.0
20°	744.3
21°	719.6
22°	690.4
23°	658.2
24°	621.3
25°	580.6
26°	535.9
27°	488.5
28°	437.8
29°	385.6
30°	332.5
31°	279.1
32°	226.9
32.5°	203.7
33°	179.7
34°	139.0
35°	106.6
36°	81.1
37°	60.2
37.5°	51.4
38°	44.7
39°	33.9
40°	27.5
42.5°	17.5
45°	11.2

TEST NUMBER: P1271742

CATALOG NUMBER: P3AS09R559827DE010 E3D1LI

CANDELA DISTRIBUTION (continued):

	0°
47.5°	6.7
50°	3.0
52.5°	1.0
55°	0.5
57.5°	0.2
60°	0.2
62.5°	0.2
65°	0.2
67.5°	0.2
70°	0.2
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)