

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1271993

Luminaire Tested: P3AS13R359827DE010 E3DLP1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1271993
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-17)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R359827DE010 E3DLP1WMH
Description: 3in Adjustable LED luminaire with, R35 optic, 2700K CCT AND, 98CRI , E3DLP1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 438.0 lumens
Efficiency: N/A
Efficacy: 30.2 lumens/watt
Spacing Criteria (0/90/45): 0.69 / 0.69 / 0.72
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1271993

CATALOG NUMBER: P3AS13R359827DE010 E3DLP1WMH

Luminous Intensity Polar Plot

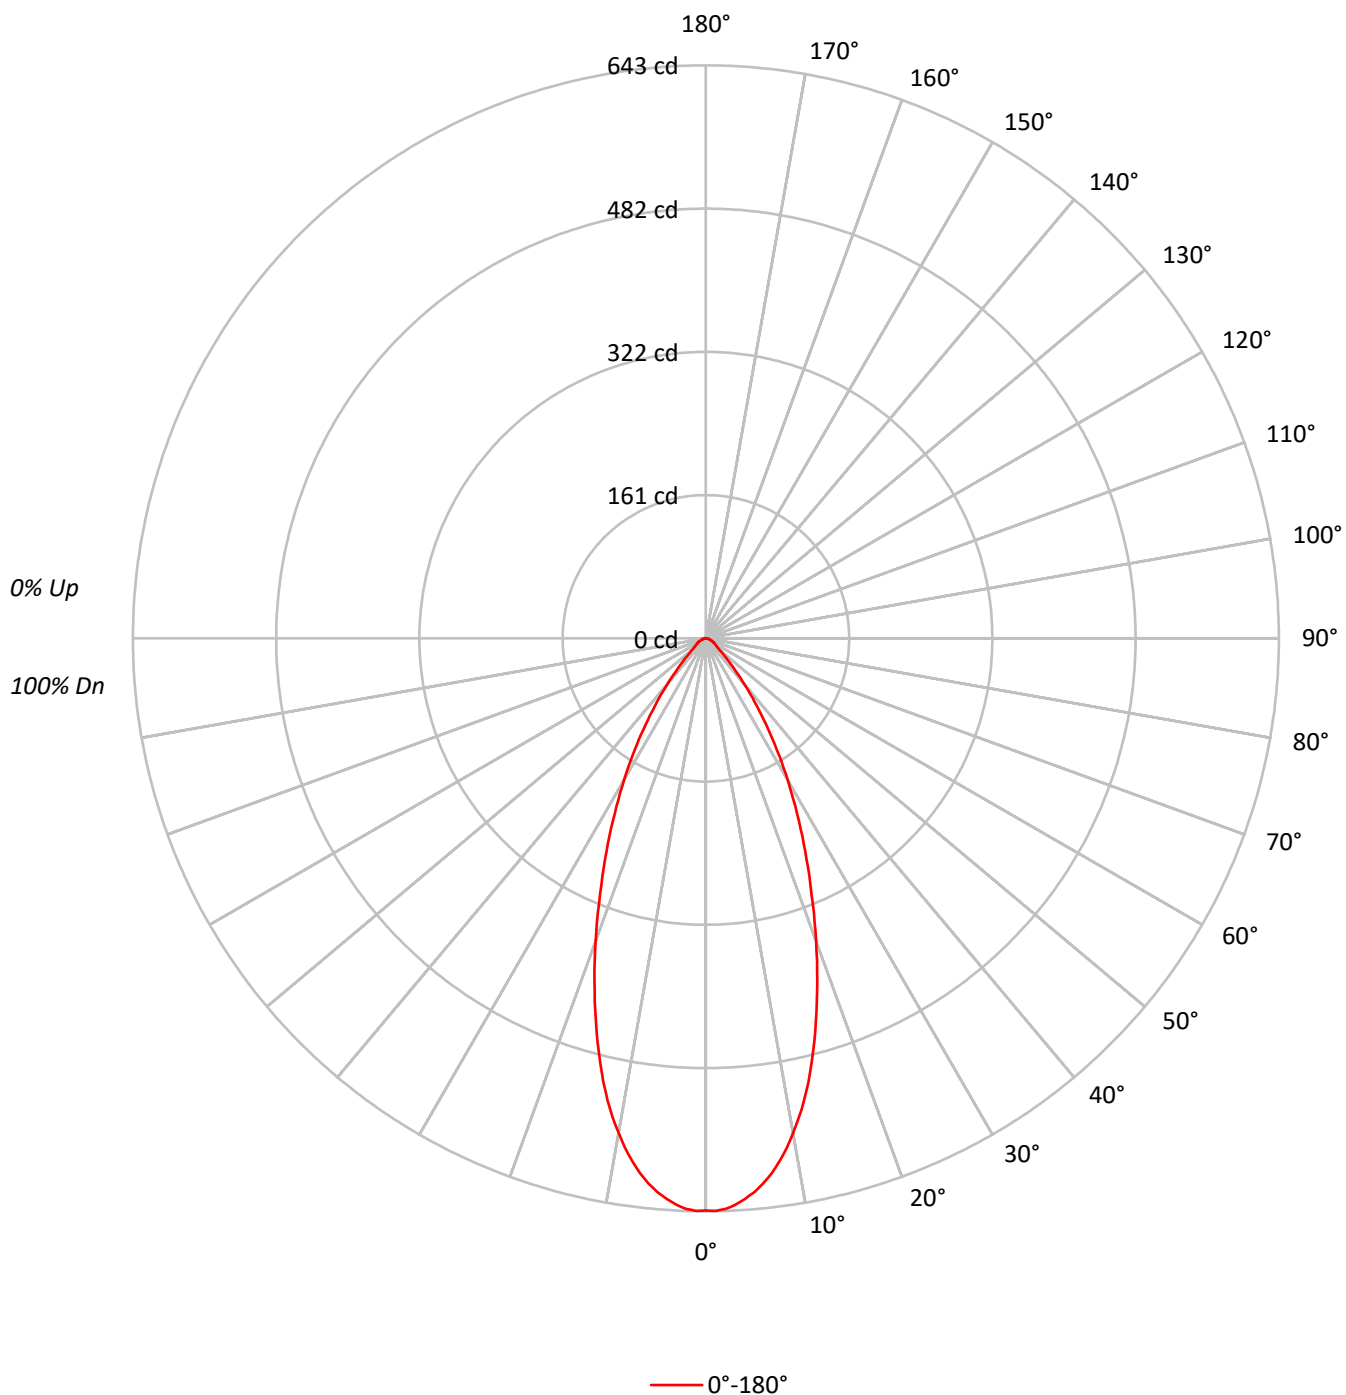

TEST NUMBER: P1271993

CATALOG NUMBER: P3AS13R359827DE010 E3DLP1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	108	105	111	108	106	104	104	102	100		100	99	97		97
2	107	102	98	94	105	100	97	93	97	94	91		94	92	89		91
3	102	95	90	86	100	94	89	85	91	87	84		89	85	82		86
4	97	89	83	79	95	88	82	78	86	81	77		84	80	77		82
5	92	83	77	73	90	82	77	73	81	76	72		79	75	71		77
6	87	78	72	68	86	77	72	68	76	71	67		75	70	67		73
7	83	74	68	63	82	73	67	63	72	67	63		71	66	63		69
8	79	70	64	60	78	69	63	59	68	63	59		67	62	59		66
9	76	66	60	56	75	66	60	56	65	59	56		64	59	56		63
10	72	63	57	53	71	62	57	53	61	56	53		61	56	53		60

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	140778
5°	137310
10°	125538
15°	106561
20°	84357
25°	63802
30°	46438
35°	31400
40°	19293
45°	11071
50°	6686
55°	5429
60°	4736
65°	4203
70°	3462
75°	3389
80°	3410
85°	3271

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 11071 cd/sqm

TEST NUMBER: P1271993

CATALOG NUMBER: P3AS13R359827DE010 E3DLP1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	57.6	13.2
10°-20°	129.4	29.5
20°-30°	121.1	27.6
30°-40°	74.1	16.9
40°-50°	29.2	6.7
50°-60°	12.9	2.9
60°-70°	8.0	1.8
70°-80°	4.3	1.0
80°-90°	1.5	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	308.1	70.4
0°-40°	382.2	87.3
0°-60°	424.3	96.9
0°-90°	438.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	438.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	642	
5°	624	58
15°	469	129
25°	264	121
35°	117	74
45°	36	29
55°	14	13
65°	8	8
75°	4	4
85°	1	1
90°	0	

TEST NUMBER: P1271993

CATALOG NUMBER: P3AS13R359827DE010 E3DLP1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	642.0
1°	642.7
2°	640.7
3°	636.6
4°	630.6
5°	623.8
6°	615.1
7°	604.9
8°	592.8
9°	579.3
10°	563.8
11°	547.6
12°	530.1
13°	511.2
14°	490.3
15°	469.4
17.5°	415.4
20°	361.5
22.5°	309.6
25°	263.7
27.5°	221.2
30°	183.4
32.5°	148.4
35°	117.3
37.5°	89.7
40°	67.4
42.5°	48.6
45°	35.7
47.5°	25.6
50°	19.6
52.5°	16.2
55°	14.2
57.5°	12.1
60°	10.8
62.5°	9.4
65°	8.1
67.5°	6.7
70°	5.4
72.5°	4.7
75°	4.0
77.5°	3.4
80°	2.7
82.5°	2.0
85°	1.3
87.5°	0.7



TEST NUMBER: P1271993

CATALOG NUMBER: P3AS13R359827DE010 E3DLP1WMH

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)