

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1272254

Luminaire Tested: P3AS17R259827DE010 E3CD1MMS

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1272254
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-12)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R259827DE010 E3CD1MMS
Description: 3in Adjustable LED luminaire with, R25 optic, 2700K CCT AND, 98CRI , E3CD1MMS TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1393.0 lumens
Efficiency: N/A
Efficacy: 68.3 lumens/watt
Spacing Criteria (0/90/45): 0.45 / 0.45 / 0.41
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 20.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1272254
CATALOG NUMBER: P3AS17R259827DE010 E3CD1MMS

Luminous Intensity Polar Plot

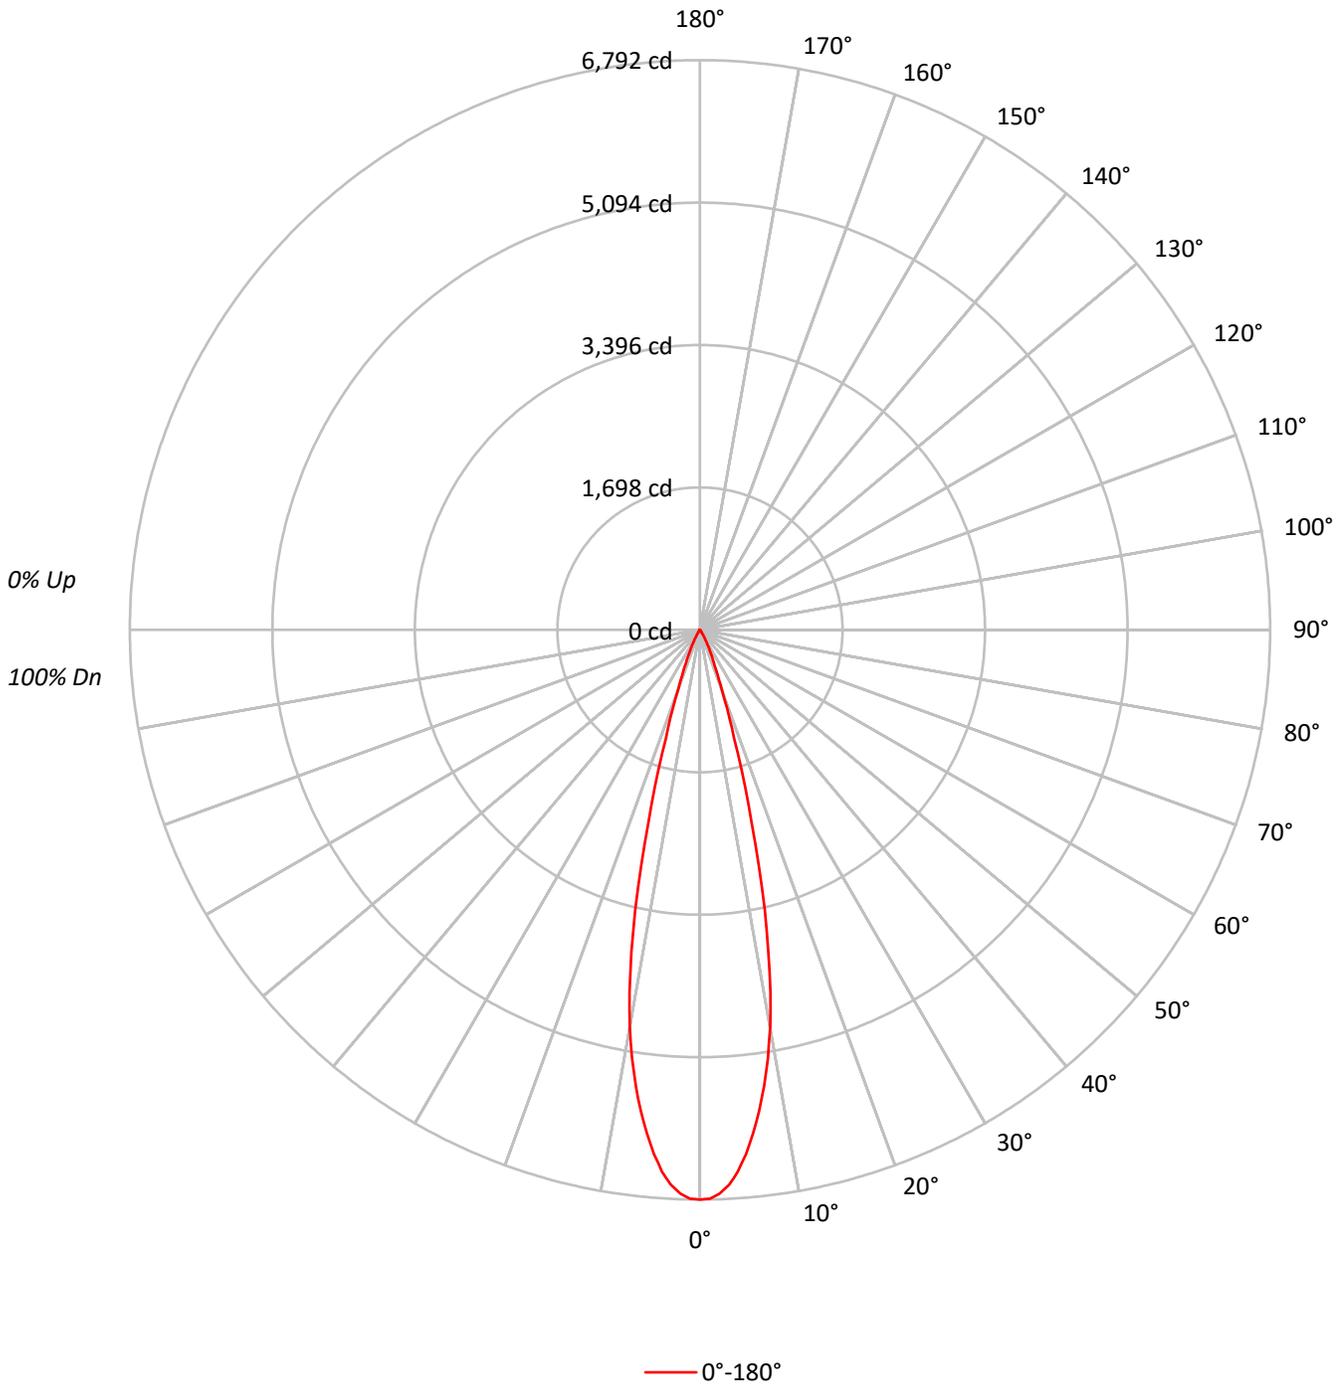



TEST NUMBER: P1272254
 CATALOG NUMBER: P3AS17R259827DE010 E3CD1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	99	99	100
1	115	113	111	110	113	111	109	108	107	106	105	103	103	102	100	99	99	97	97	97	97
2	112	108	105	103	110	107	104	102	104	102	100	101	99	98	98	97	96	96	96	96	94
3	108	104	101	98	107	103	100	97	100	98	96	98	96	94	96	94	93	92	92	92	92
4	105	100	97	94	104	99	96	93	97	95	92	96	93	91	94	92	90	89	89	89	89
5	103	97	93	90	101	96	93	90	95	92	89	93	91	89	92	90	88	87	87	87	87
6	100	94	90	87	99	93	90	87	92	89	87	91	88	86	90	87	86	85	85	85	85
7	97	91	88	85	96	91	87	85	90	87	84	89	86	84	88	85	83	83	83	83	83
8	95	89	85	83	94	89	85	82	88	84	82	87	84	82	86	83	81	81	81	81	81
9	93	87	83	80	92	86	83	80	86	82	80	85	82	80	84	82	80	79	79	79	79
10	91	85	81	78	90	84	81	78	84	80	78	83	80	78	82	80	78	77	77	77	77

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1489311
5°	1381308
10°	1071234
15°	537143
20°	176462
25°	70165
30°	26333
35°	7629
40°	3435
45°	1364
50°	1126
55°	841
60°	965
65°	1141
70°	705
75°	932
80°	1389
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 80°
 Luminance: 1389 cd/sqm



TEST NUMBER: P1272254
 CATALOG NUMBER: P3AS17R259827DE010 E3CD1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	552.0	39.6
10°-20°	658.5	47.3
20°-30°	148.5	10.7
30°-40°	24.1	1.7
40°-50°	4.4	0.3
50°-60°	2.3	0.2
60°-70°	2.0	0.1
70°-80°	1.2	0.1
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1358.9	97.6
0°-40°	1383.0	99.3
0°-60°	1389.7	99.8
0°-90°	1393.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1393.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	6792	
5°	6275	552
15°	2366	659
25°	290	148
35°	28	24
45°	4	4
55°	2	2
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P1272254
CATALOG NUMBER: P3AS17R259827DE010 E3CD1MMS

CANDELA DISTRIBUTION (FULL):

0°	
0°	6791.8
1°	6780.9
2°	6726.2
3°	6625.5
4°	6473.4
5°	6275.3
6°	6038.9
7°	5782.8
8°	5489.5
9°	5168.8
10°	4811.0
11°	4398.4
12°	3923.4
13°	3426.6
14°	2893.6
15°	2366.1
17.5°	1348.3
20°	756.2
22.5°	456.4
25°	290.0
27.5°	178.4
30°	104.0
32.5°	54.7
35°	28.5
37.5°	18.6
40°	12.0
42.5°	7.7
45°	4.4
47.5°	3.3
50°	3.3
52.5°	3.3
55°	2.2
57.5°	2.2
60°	2.2
62.5°	2.2
65°	2.2
67.5°	2.2
70°	1.1
72.5°	1.1
75°	1.1
77.5°	1.1
80°	1.1
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P1272254
CATALOG NUMBER: P3AS17R259827DE010 E3CD1MMS

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)