

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1272295

Luminaire Tested: P3AS17R309827DE010 E3DL1LI

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1272295
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-15)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R309827DE010 E3DL1LI
Description: 3in Adjustable LED luminaire with, R30 optic, 2700K CCT AND, 98CRI , E3DL1LI TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1159.0 lumens
Efficiency: N/A
Efficacy: 56.8 lumens/watt
Spacing Criteria (0/90/45): 0.54 / 0.54 / 0.54
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 20.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1272295

CATALOG NUMBER: P3AS17R309827DE010 E3DL1LI

Luminous Intensity Polar Plot

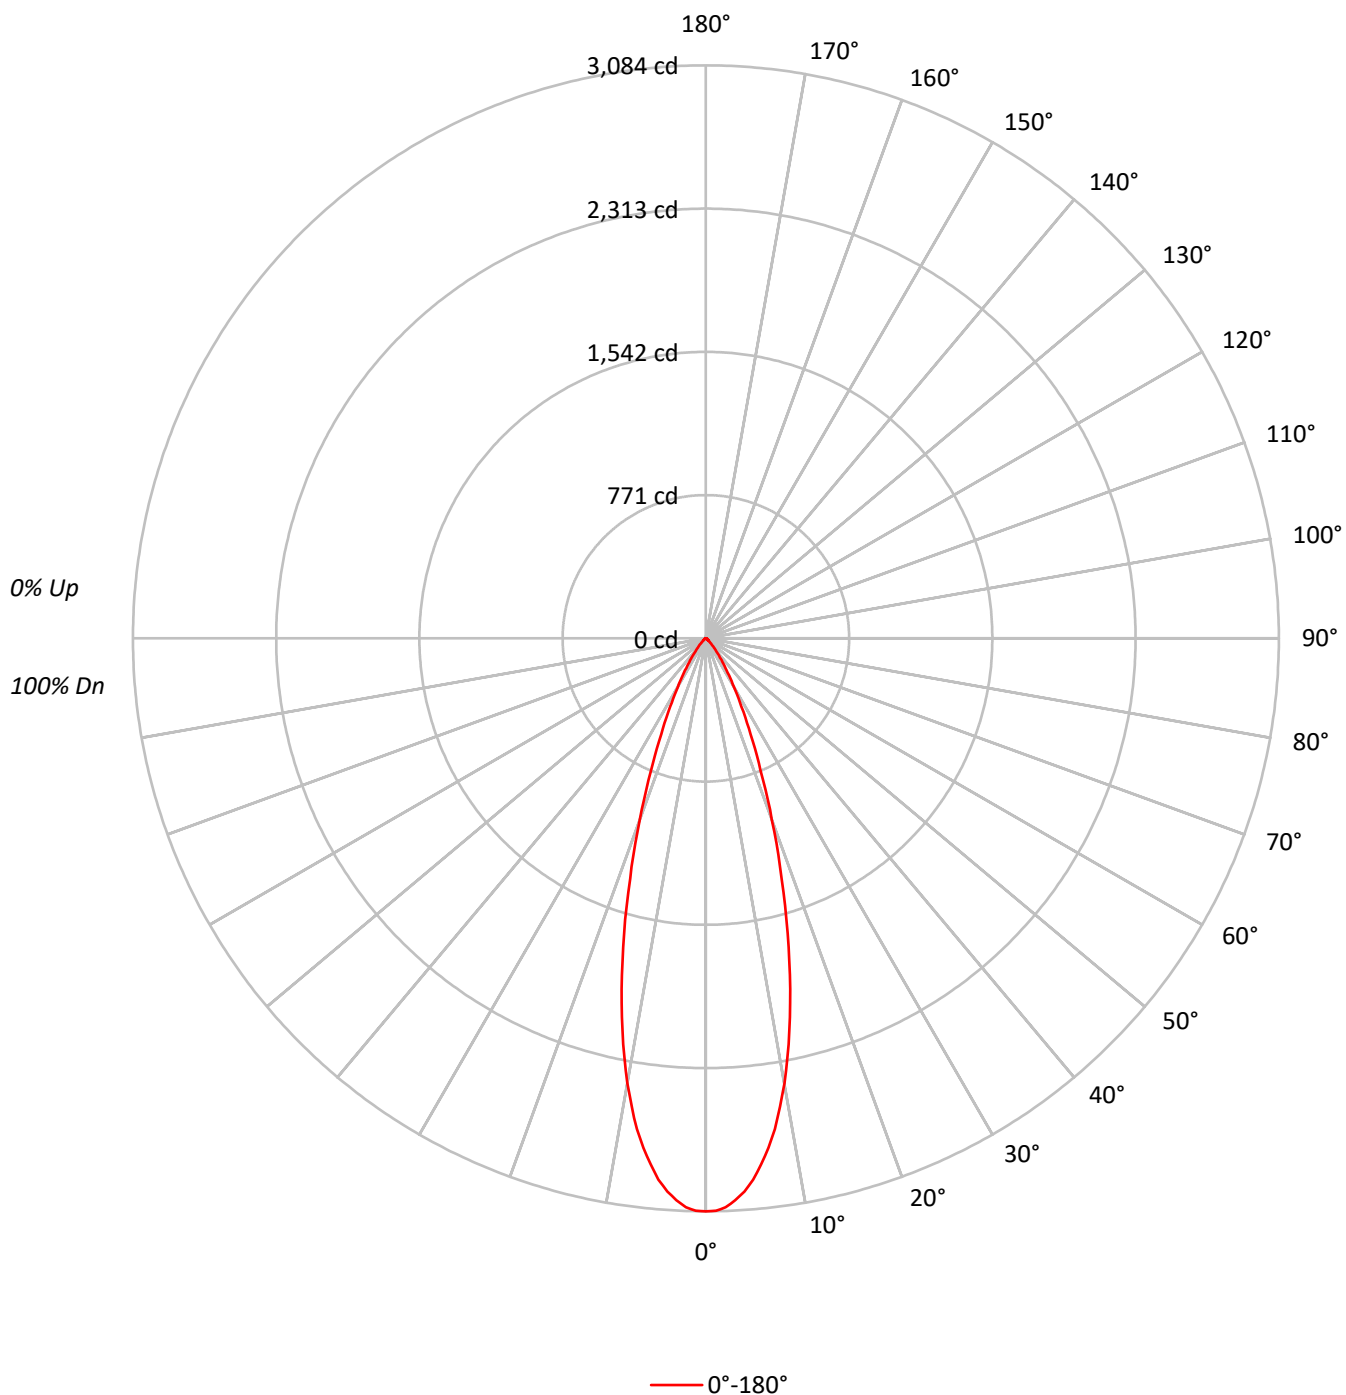

TEST NUMBER: P1272295

CATALOG NUMBER: P3AS17R309827DE010 E3DL1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	110	108	112	110	108	106	106	104	103		102	101	100		99
2	110	105	102	99	107	104	101	98	101	98	96		98	96	94		95
3	105	100	96	92	103	98	95	91	96	93	90		94	91	89		91
4	101	95	90	87	99	94	89	86	92	88	85		90	87	84		88
5	97	90	85	82	96	89	85	81	88	84	81		86	83	80		85
6	94	86	81	78	92	85	81	77	84	80	77		83	79	76		81
7	90	82	77	74	89	82	77	74	81	76	73		80	76	73		78
8	87	79	74	71	86	79	74	71	78	73	70		77	73	70		76
9	84	76	71	68	83	75	71	68	75	70	67		74	70	67		73
10	81	73	68	65	80	73	68	65	72	68	65		71	67	65		71

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	676305
5°	643714
10°	541451
15°	390468
20°	242198
25°	137742
30°	76518
35°	41626
40°	21927
45°	11877
50°	6345
55°	4167
60°	3859
65°	3995
70°	3526
75°	2796
80°	2778
85°	2768

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 11877 cd/sqm

TEST NUMBER: P1272295

CATALOG NUMBER: P3AS17R309827DE010 E3DL1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	263.3	22.7
10°-20°	468.1	40.4
20°-30°	270.5	23.3
30°-40°	102.7	8.9
40°-50°	31.5	2.7
50°-60°	10.6	0.9
60°-70°	7.2	0.6
70°-80°	3.9	0.3
80°-90°	1.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1001.9	86.4
0°-40°	1104.6	95.3
0°-60°	1146.7	98.9
0°-90°	1159.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1159.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3084	
5°	2924	263
15°	1720	468
25°	569	271
35°	156	103
45°	38	32
55°	11	11
65°	8	7
75°	3	4
85°	1	1
90°	0	

TEST NUMBER: P1272295

CATALOG NUMBER: P3AS17R309827DE010 E3DL1LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	3084.2
1°	3082.0
2°	3063.4
3°	3028.4
4°	2984.6
5°	2924.4
6°	2847.7
7°	2762.3
8°	2667.1
9°	2553.2
10°	2431.7
11°	2300.3
12°	2161.3
13°	2015.6
14°	1867.8
15°	1720.0
17.5°	1356.5
20°	1037.9
22.5°	769.7
25°	569.3
27.5°	413.9
30°	302.2
32.5°	217.9
35°	155.5
37.5°	108.4
40°	76.6
42.5°	53.6
45°	38.3
47.5°	26.3
50°	18.6
52.5°	13.1
55°	10.9
57.5°	9.9
60°	8.8
62.5°	7.7
65°	7.7
67.5°	6.6
70°	5.5
72.5°	4.4
75°	3.3
77.5°	3.3
80°	2.2
82.5°	2.2
85°	1.1
87.5°	0.0



TEST NUMBER: P1272295
CATALOG NUMBER: P3AS17R309827DE010 E3DL1LI

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)