

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1272307

Luminaire Tested: P3AS17R309827DE010 E3DLP1LI

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1272307
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-13)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R309827DE010 E3DLP1LI
Description: 3in Adjustable LED luminaire with, R30 optic, 2700K CCT AND, 98CRI , E3DLP1LI TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 706.0 lumens
Efficiency: N/A
Efficacy: 34.6 lumens/watt
Spacing Criteria (0/90/45): 0.66 / 0.66 / 0.7
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 20.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1272307

CATALOG NUMBER: P3AS17R309827DE010 E3DLP1LI

Luminous Intensity Polar Plot

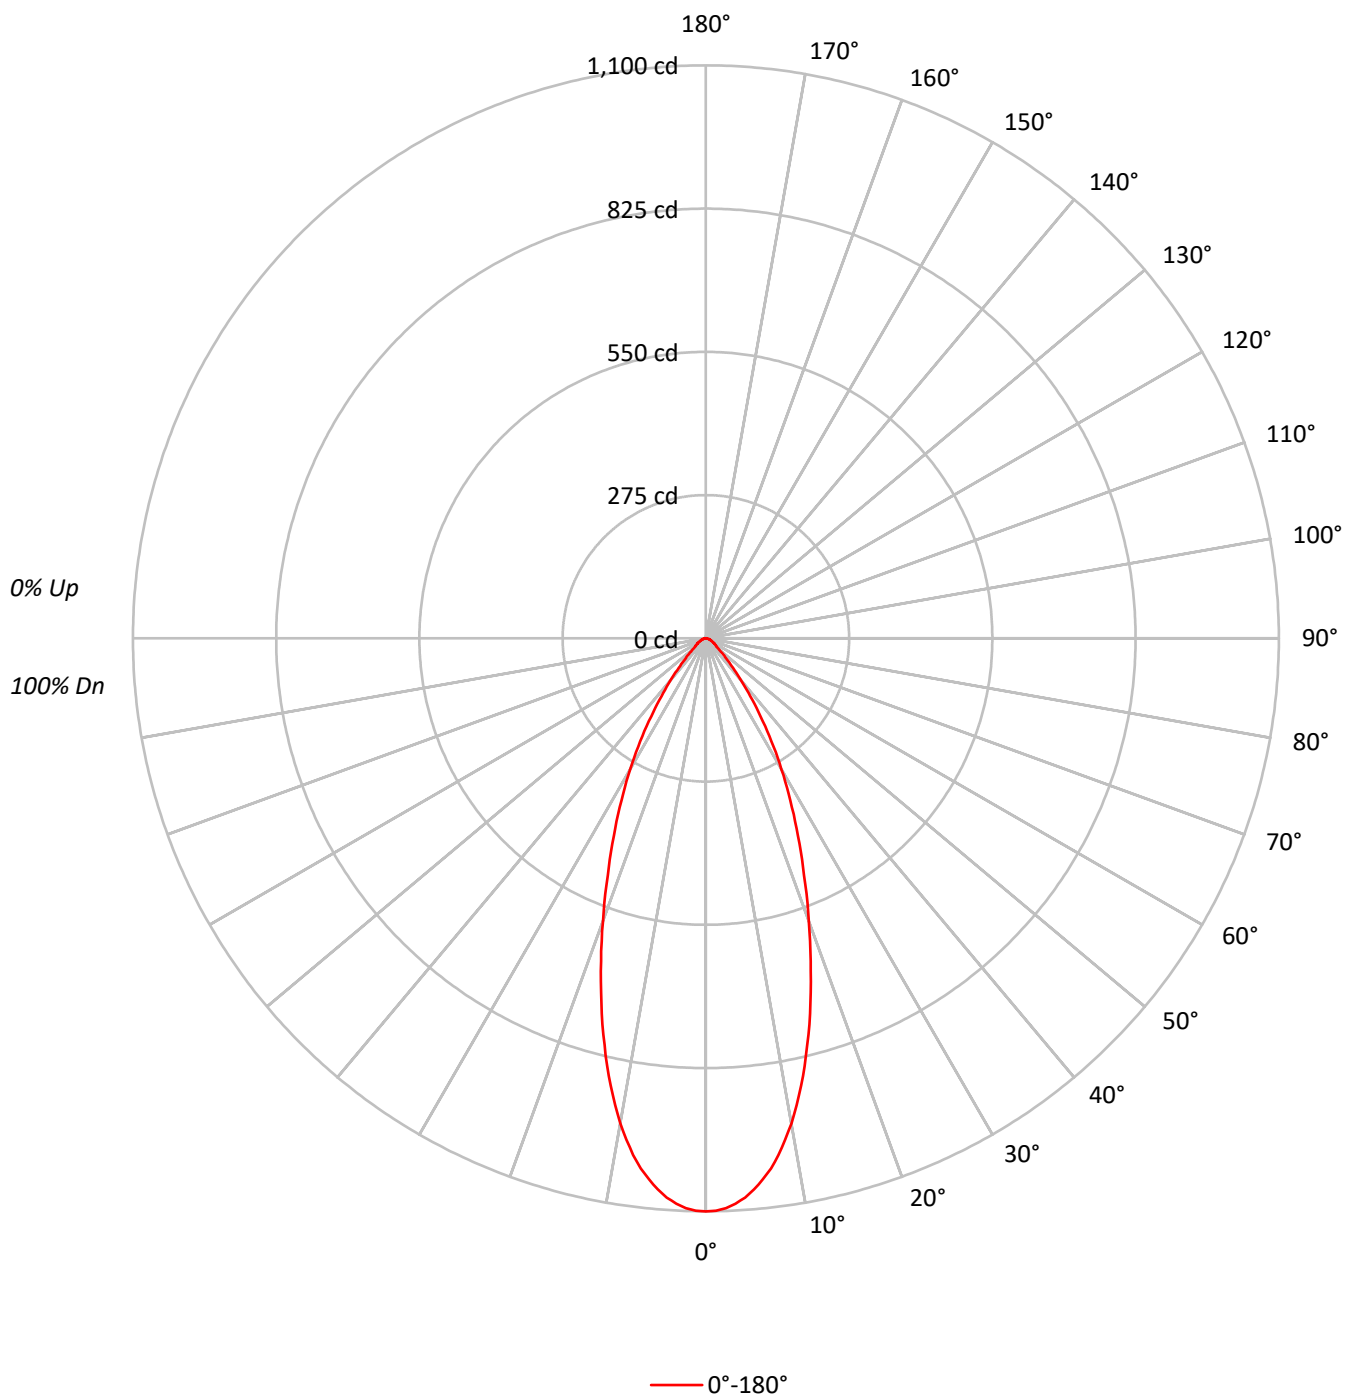

TEST NUMBER: P1272307

CATALOG NUMBER: P3AS17R309827DE010 E3DLP1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	108	105	111	108	106	104	104	102	100		100	99	97		97
2	107	102	98	95	105	101	97	94	97	94	92		94	92	90		92
3	102	95	90	86	100	94	89	85	91	87	84		89	86	83		87
4	97	89	84	79	95	88	83	79	86	81	78		84	80	77		82
5	92	84	78	73	90	83	77	73	81	76	72		79	75	72		78
6	88	79	73	68	86	78	72	68	76	71	68		75	71	67		74
7	83	74	68	64	82	74	68	64	72	67	63		71	67	63		70
8	80	70	64	60	78	70	64	60	69	63	60		67	63	60		67
9	76	67	61	57	75	66	60	57	65	60	56		64	60	56		63
10	73	63	58	54	72	63	57	54	62	57	54		61	57	53		61

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	241253
5°	233744
10°	210595
15°	174212
20°	134878
25°	101183
30°	73454
35°	48934
40°	30085
45°	17645
50°	10814
55°	8793
60°	7675
65°	6226
70°	5642
75°	5592
80°	4167
85°	5535

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 17645 cd/sqm

TEST NUMBER: P1272307

CATALOG NUMBER: P3AS17R309827DE010 E3DLP1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	97.7	13.8
10°-20°	211.4	29.9
20°-30°	192.3	27.2
30°-40°	116.3	16.5
40°-50°	46.6	6.6
50°-60°	20.6	2.9
60°-70°	12.4	1.8
70°-80°	6.8	1.0
80°-90°	1.9	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	501.3	71.0
0°-40°	617.6	87.5
0°-60°	684.8	97.0
0°-90°	706.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	706.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1100	
5°	1062	98
15°	767	211
25°	418	192
35°	183	116
45°	57	47
55°	23	21
65°	12	12
75°	7	7
85°	2	2
90°	0	

TEST NUMBER: P1272307

CATALOG NUMBER: P3AS17R309827DE010 E3DLP1LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	1100.2
1°	1099.1
2°	1094.7
3°	1087.1
4°	1076.1
5°	1061.9
6°	1044.4
7°	1025.8
8°	1001.7
9°	974.3
10°	945.8
11°	913.0
12°	878.0
13°	842.9
14°	804.6
15°	767.4
17.5°	670.0
20°	578.0
22.5°	492.6
25°	418.2
27.5°	350.3
30°	290.1
32.5°	234.3
35°	182.8
37.5°	140.1
40°	105.1
42.5°	76.6
45°	56.9
47.5°	42.7
50°	31.7
52.5°	25.2
55°	23.0
57.5°	19.7
60°	17.5
62.5°	14.2
65°	12.0
67.5°	10.9
70°	8.8
72.5°	7.7
75°	6.6
77.5°	5.5
80°	3.3
82.5°	2.2
85°	2.2
87.5°	1.1



TEST NUMBER: P1272307

CATALOG NUMBER: P3AS17R309827DE010 E3DLP1LI

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)