

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1272329

Luminaire Tested: P3AS17R359827DE010 E3DLD1LI

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1272329
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-18)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R359827DE010 E3DLD1LI
Description: 3in Adjustable LED luminaire with, R35 optic, 2700K CCT AND, 98CRI , E3DLD1LI TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 885.0 lumens
Efficiency: N/A
Efficacy: 43.4 lumens/watt
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.87
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 20.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1272329

CATALOG NUMBER: P3AS17R359827DE010 E3DLD1LI

Luminous Intensity Polar Plot

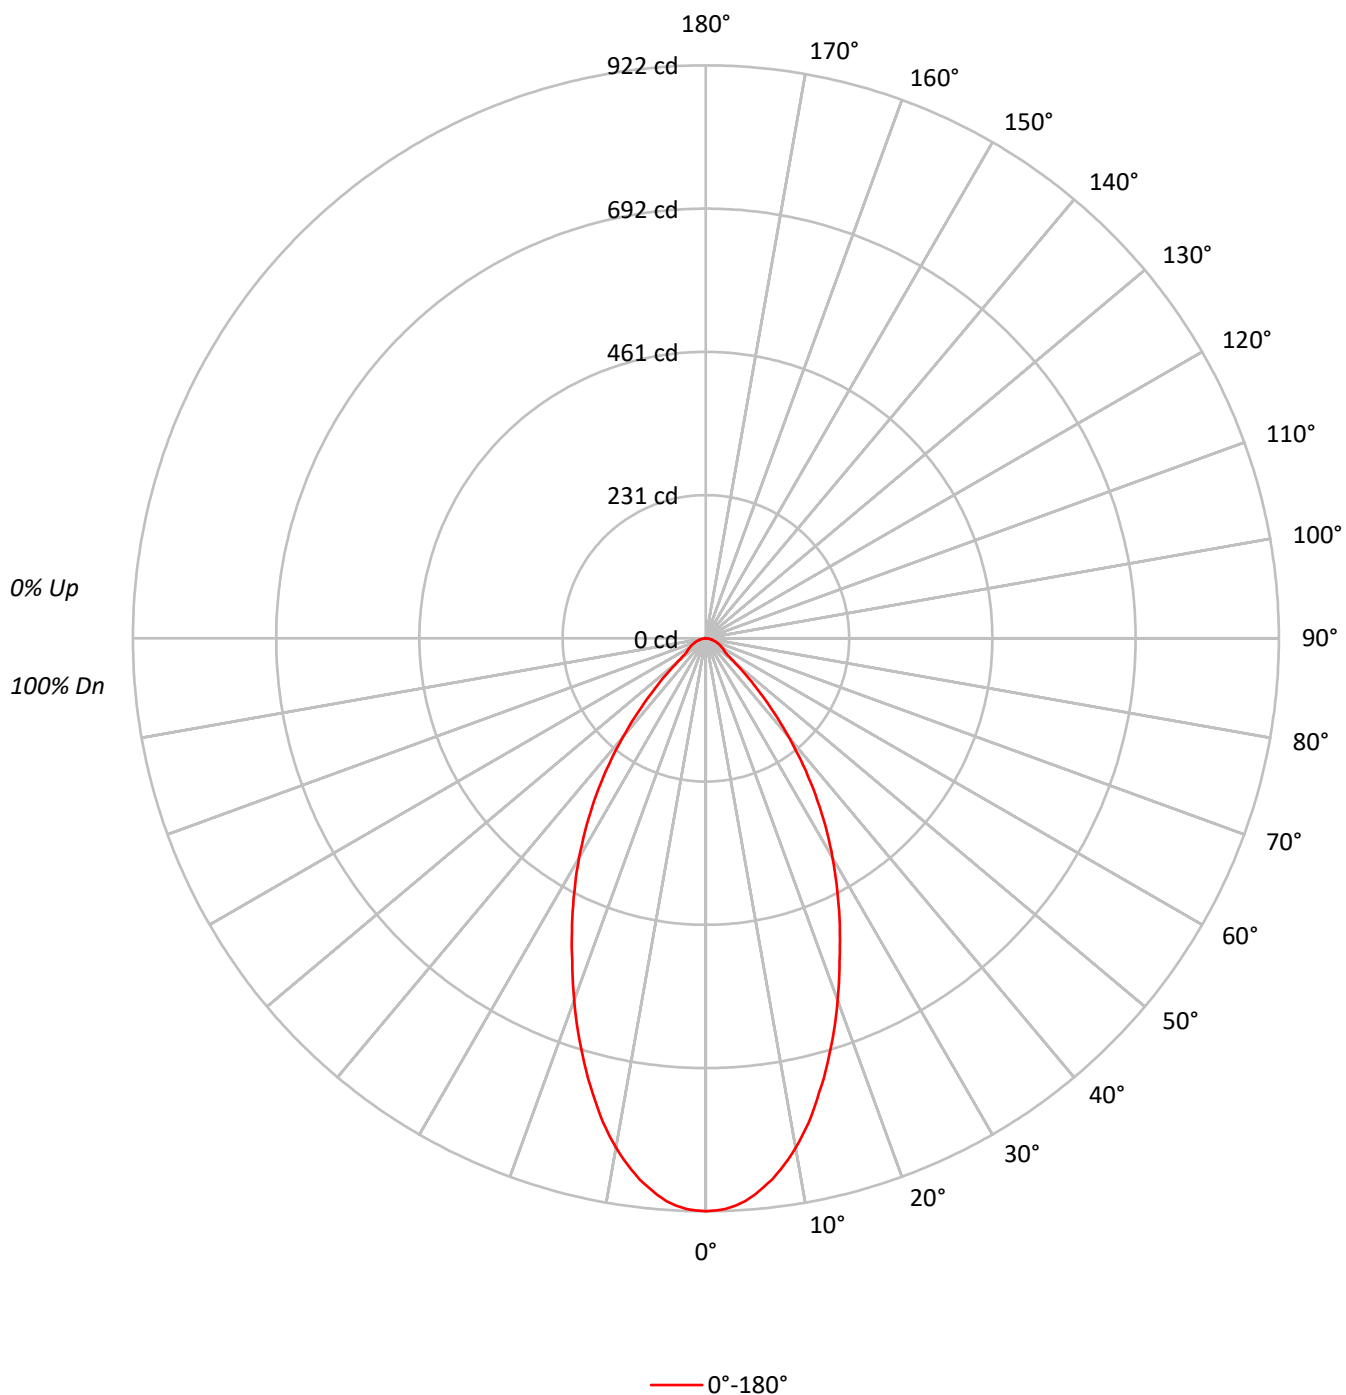

TEST NUMBER: P1272329

CATALOG NUMBER: P3AS17R359827DE010 E3DLD1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	104	110	107	104	102	103	101	99		99	98	96		96
2	106	100	96	92	104	98	94	91	95	92	89		92	89	87		89
3	100	92	87	82	98	91	86	81	88	84	80		86	82	79		83
4	94	85	79	74	92	84	78	74	82	77	73		80	75	72		78
5	89	79	73	68	87	78	72	67	76	71	67		75	70	66		73
6	84	74	67	62	82	73	67	62	71	66	61		70	65	61		68
7	79	69	62	57	78	68	62	57	67	61	57		65	60	57		64
8	75	64	58	53	74	64	57	53	63	57	53		62	56	53		61
9	71	60	54	50	70	60	54	50	59	53	49		58	53	49		57
10	67	57	51	46	66	56	50	46	56	50	46		55	50	46		54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	202155
5°	197886
10°	185301
15°	166335
20°	144703
25°	123297
30°	103282
35°	82262
40°	59483
45°	37647
50°	20503
55°	14222
60°	13420
65°	12505
70°	11925
75°	10167
80°	9723
85°	8303

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 37647 cd/sqm

TEST NUMBER: P1272329

CATALOG NUMBER: P3AS17R359827DE010 E3DLD1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	83.7	9.5
10°-20°	203.9	23.0
20°-30°	233.7	26.4
30°-40°	190.7	21.5
40°-50°	96.2	10.9
50°-60°	35.7	4.0
60°-70°	23.9	2.7
70°-80°	13.2	1.5
80°-90°	4.0	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	521.2	58.9
0°-40°	711.9	80.4
0°-60°	843.8	95.3
0°-90°	885.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	885.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	922	
5°	899	84
15°	733	204
25°	510	234
35°	307	191
45°	121	96
55°	37	36
65°	24	24
75°	12	13
85°	3	4
90°	0	

TEST NUMBER: P1272329

CATALOG NUMBER: P3AS17R359827DE010 E3DLD1LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	921.9
1°	920.8
2°	918.6
3°	914.3
4°	907.7
5°	899.0
6°	888.0
7°	877.1
8°	862.9
9°	848.7
10°	832.2
11°	814.8
12°	796.2
13°	775.4
14°	753.5
15°	732.7
17.5°	677.0
20°	620.1
22.5°	562.1
25°	509.6
27.5°	458.2
30°	407.9
32.5°	357.6
35°	307.3
37.5°	257.0
40°	207.8
42.5°	161.9
45°	121.4
47.5°	87.5
50°	60.1
52.5°	43.7
55°	37.2
57.5°	33.9
60°	30.6
62.5°	27.3
65°	24.1
67.5°	20.8
70°	18.6
72.5°	15.3
75°	12.0
77.5°	9.8
80°	7.7
82.5°	5.5
85°	3.3
87.5°	2.2



TEST NUMBER: P1272329

CATALOG NUMBER: P3AS17R359827DE010 E3DLD1LI

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)