

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1272375

Luminaire Tested: P3AS17R459827DE010 E3CD1MMS

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1272375
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-28)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R459827DE010 E3CD1MMS
Description: 3in Adjustable LED luminaire with, R45 optic, 2700K CCT AND, 98CRI , E3CD1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1468.0 lumens
Efficiency: N/A
Efficacy: 72.0 lumens/watt
Spacing Criteria (0/90/45): 0.72 / 0.72 / 0.66
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 20.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1272375

CATALOG NUMBER: P3AS17R459827DE010 E3CD1MMS

Luminous Intensity Polar Plot

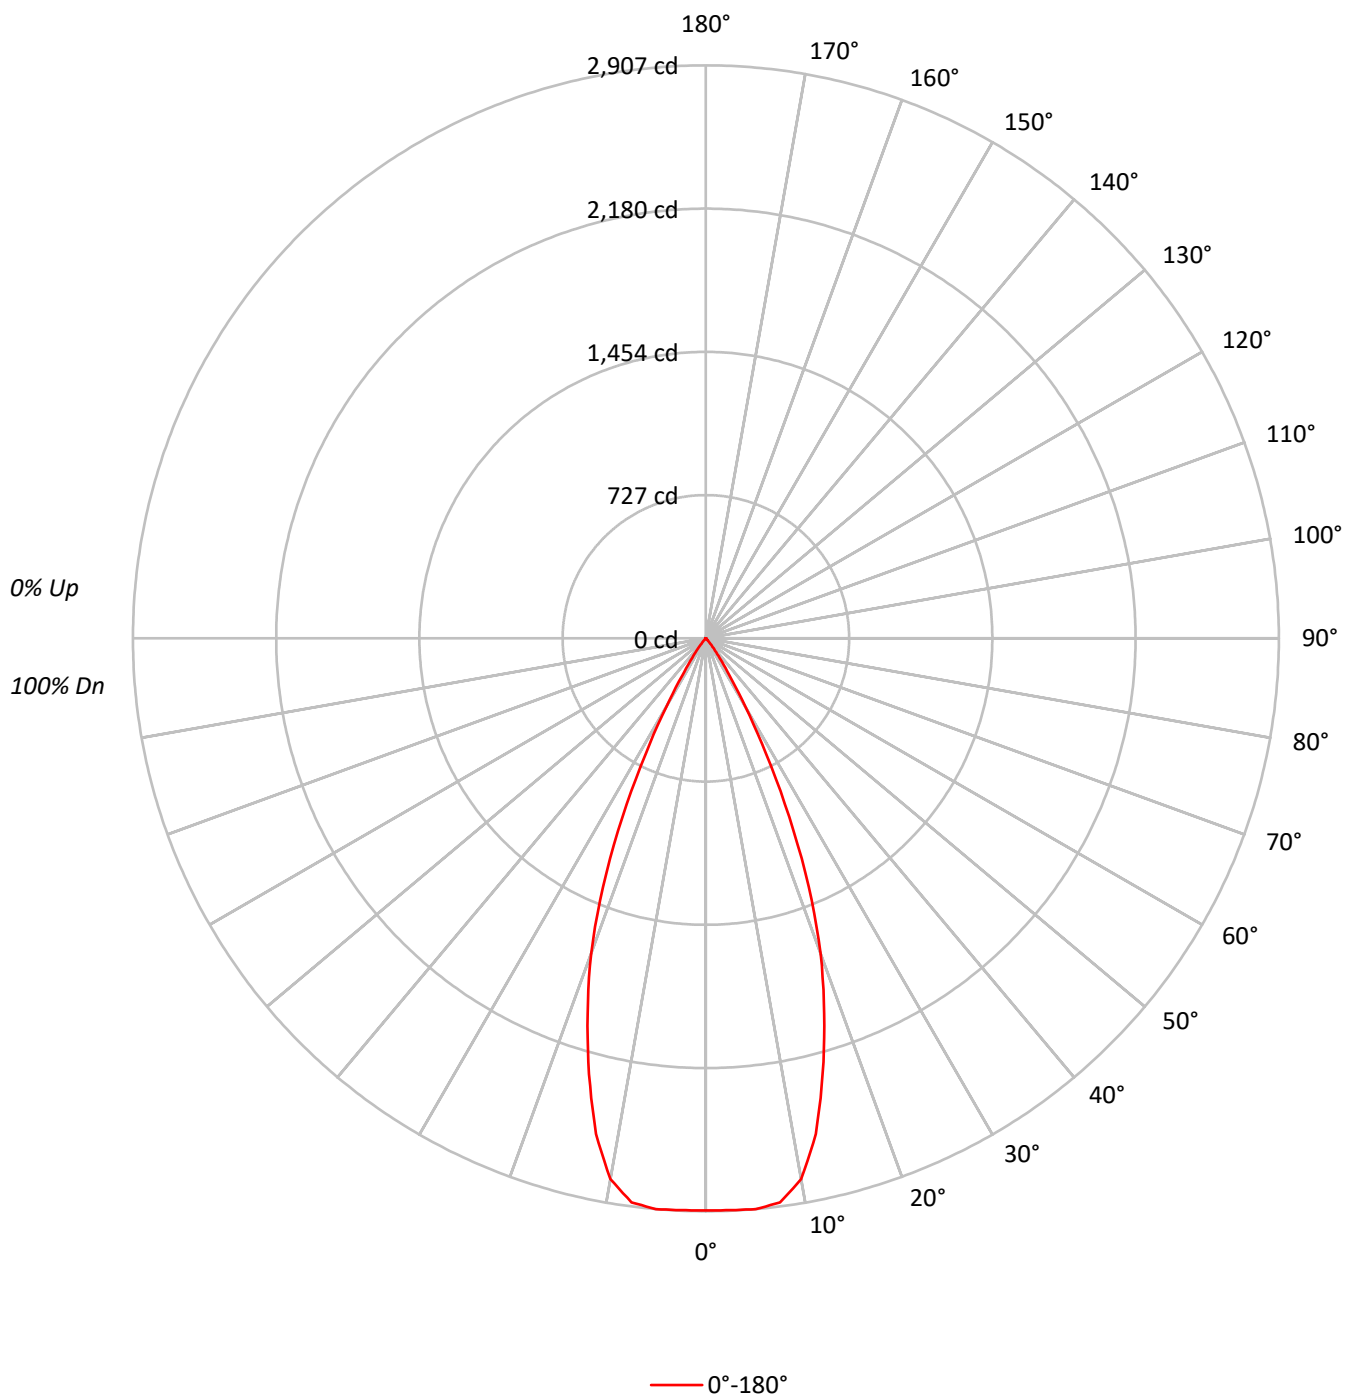

TEST NUMBER: P1272375

CATALOG NUMBER: P3AS17R459827DE010 E3CD1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	110	108	112	110	108	106	106	104	103		102	101	100		99
2	110	106	102	100	108	104	101	98	101	98	96		98	96	94		95
3	106	100	96	93	104	99	95	92	96	93	91		94	91	89		92
4	102	95	91	87	100	94	90	87	92	89	86		90	87	85		88
5	98	91	86	82	96	90	85	82	88	84	81		87	83	81		85
6	94	87	82	78	93	86	81	78	85	80	77		83	80	77		82
7	90	83	78	74	89	82	78	74	81	77	74		80	76	74		79
8	87	79	74	71	86	79	74	71	78	74	71		77	73	70		76
9	84	76	71	68	83	76	71	68	75	71	68		74	70	67		73
10	81	73	68	65	80	73	68	65	72	68	65		71	67	65		71

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	636462
5°	639862
10°	620184
15°	519731
20°	397285
25°	241853
30°	100623
35°	32230
40°	10019
45°	2047
50°	1501
55°	1682
60°	1447
65°	1712
70°	1410
75°	1864
80°	1389
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2047 cd/sqm

TEST NUMBER: P1272375

CATALOG NUMBER: P3AS17R459827DE010 E3CD1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	274.1	18.7
10°-20°	629.2	42.9
20°-30°	453.0	30.9
30°-40°	94.3	6.4
40°-50°	8.6	0.6
50°-60°	3.6	0.2
60°-70°	2.9	0.2
70°-80°	1.9	0.1
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1356.4	92.4
0°-40°	1450.7	98.8
0°-60°	1462.8	99.6
0°-90°	1468.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1468.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2902	
5°	2907	274
15°	2289	629
25°	1000	453
35°	120	94
45°	7	9
55°	4	4
65°	3	3
75°	2	2
85°	0	0
90°	0	

TEST NUMBER: P1272375

CATALOG NUMBER: P3AS17R459827DE010 E3CD1MMS

CANDELA DISTRIBUTION (FULL):

0°	
0°	2902.5
2.5°	2903.6
5°	2906.9
7.5°	2886.1
10°	2785.3
12.5°	2575.1
15°	2289.4
17.5°	1997.0
20°	1702.5
22.5°	1364.2
25°	999.6
27.5°	659.1
30°	397.4
32.5°	222.3
35°	120.4
37.5°	67.9
40°	35.0
42.5°	15.3
45°	6.6
47.5°	4.4
50°	4.4
52.5°	4.4
55°	4.4
57.5°	3.3
60°	3.3
62.5°	3.3
65°	3.3
67.5°	2.2
70°	2.2
72.5°	2.2
75°	2.2
77.5°	1.1
80°	1.1
82.5°	1.1
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)