

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1272383

Luminaire Tested: P3AS17R459827DE010 E3DL1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1272383
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-27)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R459827DE010 E3DL1WMH
Description: 3in Adjustable LED luminaire with, R45 optic, 2700K CCT AND, 98CRI , E3DL1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1223.0 lumens
Efficiency: N/A
Efficacy: 60.0 lumens/watt
Spacing Criteria (0/90/45): 0.69 / 0.69 / 0.69
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 20.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1272383

CATALOG NUMBER: P3AS17R459827DE010 E3DL1WMH

Luminous Intensity Polar Plot

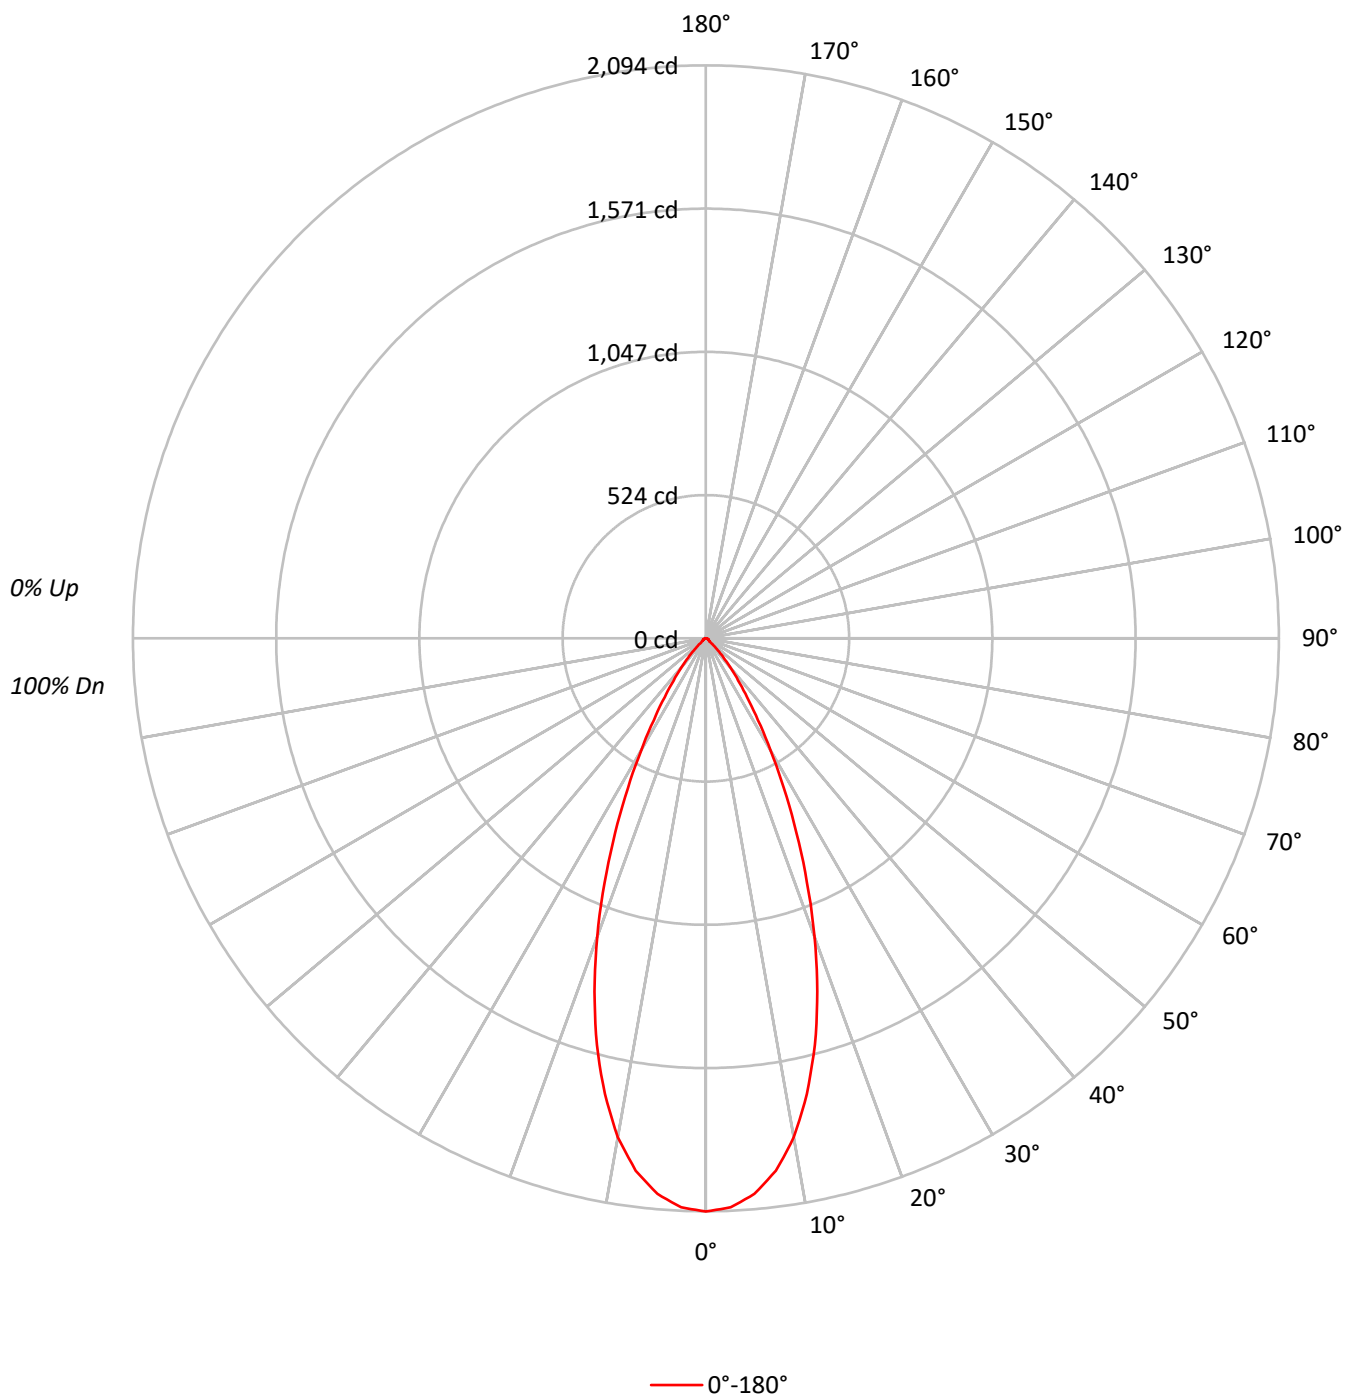

TEST NUMBER: P1272383

CATALOG NUMBER: P3AS17R459827DE010 E3DL1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	111	109	107	111	109	107	105	105	103	102		101	100	99		98
2	109	104	100	97	106	102	99	96	99	96	94		96	94	92		93
3	104	98	93	89	102	96	92	88	94	90	87		91	88	86		89
4	99	92	87	83	97	91	86	82	89	85	81		87	83	80		85
5	94	87	81	77	93	86	81	77	84	80	76		82	79	76		81
6	90	82	76	73	89	81	76	72	80	75	72		78	74	71		77
7	86	78	72	68	85	77	72	68	76	71	68		75	71	67		74
8	83	74	68	65	82	73	68	64	72	68	64		71	67	64		70
9	79	70	65	61	78	70	65	61	69	64	61		68	64	61		67
10	76	67	62	58	75	67	62	58	66	61	58		65	61	58		65

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	459283
5°	448513
10°	412306
15°	349355
20°	271040
25°	189471
30°	119360
35°	70269
40°	39760
45°	19320
50°	6720
55°	5429
60°	5263
65°	5085
70°	4937
75°	4660
80°	4167
85°	2768

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 19320 cd/sqm

TEST NUMBER: P1272383

CATALOG NUMBER: P3AS17R459827DE010 E3DL1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	188.6	15.4
10°-20°	422.6	34.6
20°-30°	358.8	29.3
30°-40°	171.2	14.0
40°-50°	51.5	4.2
50°-60°	13.1	1.1
60°-70°	9.7	0.8
70°-80°	5.8	0.5
80°-90°	1.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	970.0	79.3
0°-40°	1141.2	93.3
0°-60°	1205.8	98.6
0°-90°	1223.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1223.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2094	
5°	2038	189
15°	1539	423
25°	783	359
35°	262	171
45°	62	52
55°	14	13
65°	10	10
75°	6	6
85°	1	2
90°	0	

TEST NUMBER: P1272383

CATALOG NUMBER: P3AS17R459827DE010 E3DL1WMH

CANDELA DISTRIBUTION (FULL):

	0°
0°	2094.5
2.5°	2081.4
5°	2037.6
7.5°	1962.1
10°	1851.7
12.5°	1705.1
15°	1538.9
17.5°	1354.0
20°	1161.5
22.5°	965.8
25°	783.1
27.5°	616.9
30°	471.4
32.5°	354.4
35°	262.5
37.5°	193.6
40°	138.9
42.5°	96.2
45°	62.3
47.5°	35.0
50°	19.7
52.5°	15.3
55°	14.2
57.5°	13.1
60°	12.0
62.5°	10.9
65°	9.8
67.5°	8.7
70°	7.7
72.5°	6.6
75°	5.5
77.5°	4.4
80°	3.3
82.5°	2.2
85°	1.1
87.5°	1.1
90°	0.0

(END OF REPORT)