

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1272385

Luminaire Tested: P3AS17R459827DE010 E3DLD1H

Issue Date: 1/30/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1272385  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-26)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS17R459827DE010 E3DLD1H  
Description: 3in Adjustable LED luminaire with, R45 optic, 2700K CCT AND, 98CRI , E3DLD1H TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 950.0 lumens  
Efficiency: N/A  
Efficacy: 46.6 lumens/watt  
Spacing Criteria (0/90/45): 0.84 / 0.84 / 0.92  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 20.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1272385

CATALOG NUMBER: P3AS17R459827DE010 E3DLD1H

### Luminous Intensity Polar Plot

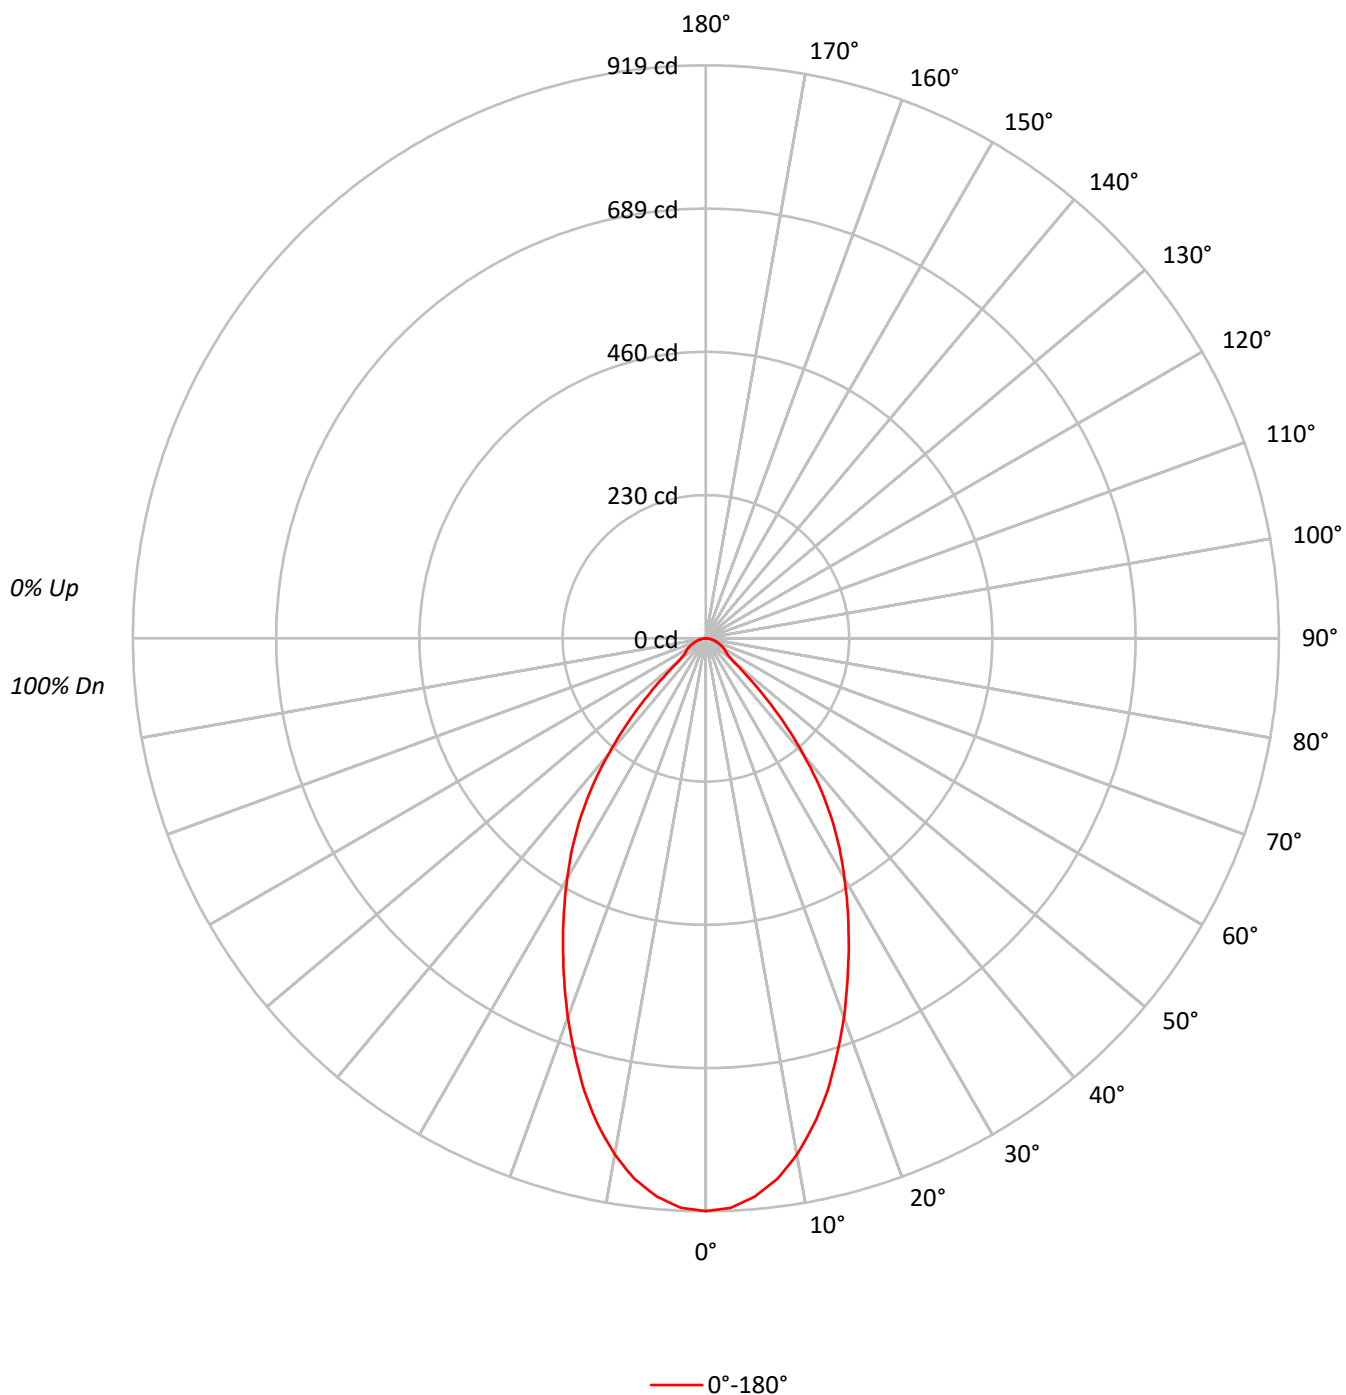

TEST NUMBER: P1272385

CATALOG NUMBER: P3AS17R459827DE010 E3DLD1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|
| RF  | 20  |     |     |     | 20  |     |     |     |     | 20  |     |     |     |     | 20  |     |     |     |    | 20 |
| RC  | 80  |     |     |     | 70  |     |     |     |     | 50  |     |     |     |     | 30  |     |     |     |    | 10 |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    |
| 1   | 112 | 109 | 106 | 104 | 110 | 107 | 104 | 102 | 103 | 101 | 99  | 99  | 97  | 96  | 96  | 94  | 93  | 91  |    |    |
| 2   | 106 | 100 | 95  | 91  | 103 | 98  | 94  | 90  | 95  | 91  | 88  | 92  | 89  | 86  | 89  | 87  | 85  | 83  |    |    |
| 3   | 99  | 92  | 86  | 82  | 97  | 90  | 85  | 81  | 88  | 83  | 80  | 85  | 81  | 78  | 83  | 80  | 77  | 75  |    |    |
| 4   | 94  | 85  | 78  | 74  | 92  | 84  | 78  | 73  | 81  | 76  | 72  | 79  | 75  | 71  | 77  | 74  | 71  | 69  |    |    |
| 5   | 88  | 79  | 72  | 67  | 86  | 78  | 71  | 67  | 76  | 70  | 66  | 74  | 69  | 65  | 72  | 68  | 65  | 63  |    |    |
| 6   | 83  | 73  | 66  | 61  | 81  | 72  | 66  | 61  | 71  | 65  | 61  | 69  | 64  | 60  | 68  | 63  | 60  | 58  |    |    |
| 7   | 78  | 68  | 61  | 57  | 77  | 67  | 61  | 56  | 66  | 60  | 56  | 65  | 60  | 56  | 64  | 59  | 55  | 54  |    |    |
| 8   | 74  | 64  | 57  | 52  | 73  | 63  | 57  | 52  | 62  | 56  | 52  | 61  | 56  | 52  | 60  | 55  | 52  | 50  |    |    |
| 9   | 70  | 60  | 53  | 49  | 69  | 59  | 53  | 49  | 58  | 52  | 48  | 57  | 52  | 48  | 56  | 52  | 48  | 47  |    |    |
| 10  | 67  | 56  | 50  | 45  | 66  | 56  | 49  | 45  | 55  | 49  | 45  | 54  | 49  | 45  | 53  | 48  | 45  | 44  |    |    |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 201431 |
| 5°  | 197842 |
| 10° | 187215 |
| 15° | 170739 |
| 20° | 150980 |
| 25° | 131112 |
| 30° | 112549 |
| 35° | 93773  |
| 40° | 69874  |
| 45° | 42764  |
| 50° | 19786  |
| 55° | 15483  |
| 60° | 14867  |
| 65° | 13646  |
| 70° | 12630  |
| 75° | 12031  |
| 80° | 11113  |
| 85° | 8303   |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 42764 cd/sqm

TEST NUMBER: P1272385

CATALOG NUMBER: P3AS17R459827DE010 E3DLD1H

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 84.0   | 8.8       |
| 10°-20°   | 209.4  | 22.0      |
| 20°-30°   | 248.8  | 26.2      |
| 30°-40°   | 216.2  | 22.8      |
| 40°-50°   | 108.4  | 11.4      |
| 50°-60°   | 37.6   | 4.0       |
| 60°-70°   | 26.4   | 2.8       |
| 70°-80°   | 14.7   | 1.5       |
| 80°-90°   | 4.5    | 0.5       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| <hr/>     |        |           |
| 0°-30°    | 542.2  | 57.1      |
| 0°-40°    | 758.3  | 79.8      |
| 0°-60°    | 904.4  | 95.2      |
| 0°-90°    | 950.0  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 950.0  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°  | Flux |
|-----|-----|------|
| 0°  | 919 |      |
| 5°  | 899 | 84   |
| 15° | 752 | 209  |
| 25° | 542 | 249  |
| 35° | 350 | 216  |
| 45° | 138 | 108  |
| 55° | 40  | 38   |
| 65° | 26  | 26   |
| 75° | 14  | 15   |
| 85° | 3   | 4    |
| 90° | 0   |      |

TEST NUMBER: P1272385

CATALOG NUMBER: P3AS17R459827DE010 E3DLD1H

**CANDELA DISTRIBUTION (FULL):**

| 0°    |       |
|-------|-------|
| 0°    | 918.6 |
| 2.5°  | 914.2 |
| 5°    | 898.8 |
| 7.5°  | 874.8 |
| 10°   | 840.8 |
| 12.5° | 799.2 |
| 15°   | 752.1 |
| 17.5° | 699.6 |
| 20°   | 647.0 |
| 22.5° | 593.4 |
| 25°   | 541.9 |
| 27.5° | 492.7 |
| 30°   | 444.5 |
| 32.5° | 398.5 |
| 35°   | 350.3 |
| 37.5° | 298.9 |
| 40°   | 244.1 |
| 42.5° | 190.5 |
| 45°   | 137.9 |
| 47.5° | 90.9  |
| 50°   | 58.0  |
| 52.5° | 44.9  |
| 55°   | 40.5  |
| 57.5° | 37.2  |
| 60°   | 33.9  |
| 62.5° | 30.7  |
| 65°   | 26.3  |
| 67.5° | 23.0  |
| 70°   | 19.7  |
| 72.5° | 16.4  |
| 75°   | 14.2  |
| 77.5° | 10.9  |
| 80°   | 8.8   |
| 82.5° | 6.6   |
| 85°   | 3.3   |
| 87.5° | 2.2   |
| 90°   | 0.0   |

(END OF REPORT)