

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1272429

Luminaire Tested: P3AS17R559827DE010 E3CD1MMS

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1272429
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-36)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R559827DE010 E3CD1MMS
Description: 3in Adjustable LED luminaire with, R55 optic, 2700K CCT AND, 98CRI , E3CD1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1457.0 lumens
Efficiency: N/A
Efficacy: 71.4 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.82
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 20.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1272429

CATALOG NUMBER: P3AS17R559827DE010 E3CD1MMS

Luminous Intensity Polar Plot

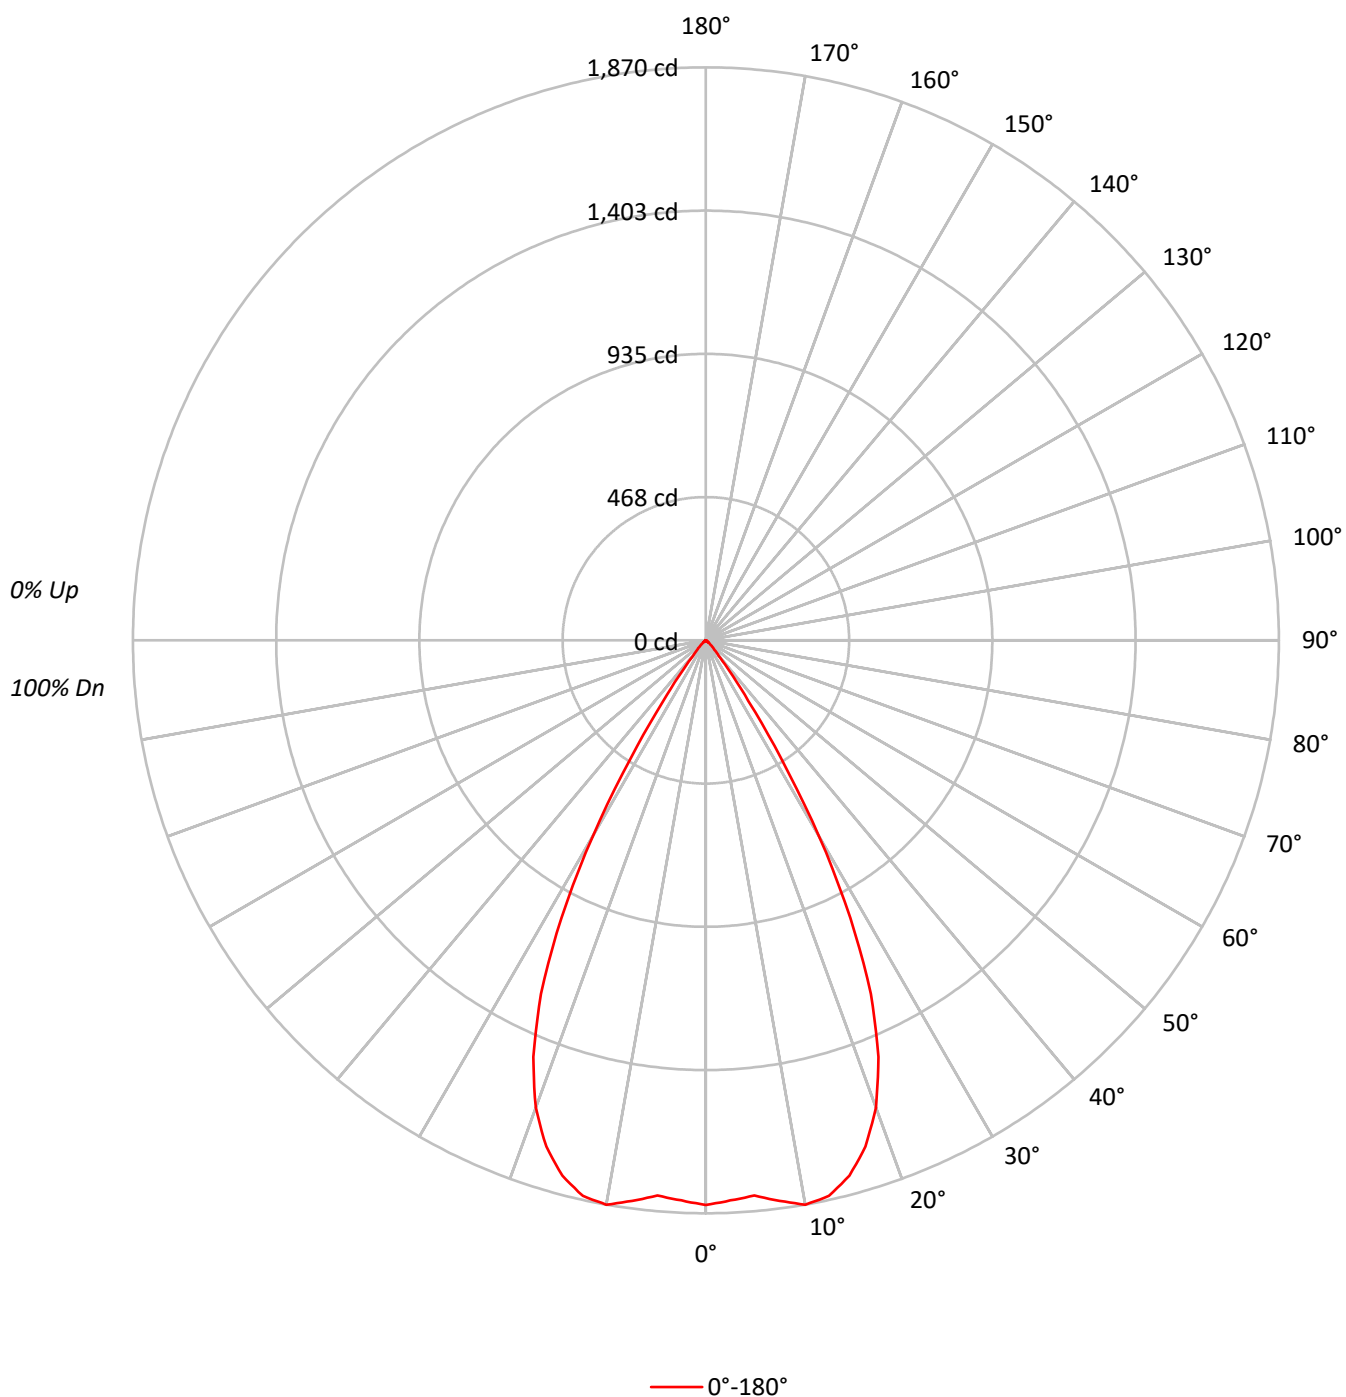

TEST NUMBER: P1272429

CATALOG NUMBER: P3AS17R559827DE010 E3CD1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	107	112	109	107	105	105	104	102		101	100	99		98	97	96	94
2	109	104	101	98	107	103	99	96	100	97	94		97	94	92		94	92	90	89
3	104	98	94	90	102	97	93	89	94	91	88		92	89	86		90	87	85	84
4	99	92	87	84	98	91	87	83	89	85	82		87	84	81		85	83	80	79
5	95	87	82	78	93	86	81	78	85	80	77		83	79	76		82	78	76	74
6	91	83	77	73	89	82	77	73	80	76	72		79	75	72		78	74	72	70
7	87	78	73	69	85	78	72	69	76	72	68		75	71	68		74	70	68	66
8	83	74	69	65	82	74	68	65	73	68	65		72	67	64		71	67	64	63
9	79	71	65	61	78	70	65	61	69	64	61		68	64	61		68	64	61	60
10	76	67	62	58	75	67	62	58	66	61	58		65	61	58		65	61	58	57

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	404112
5°	400351
10°	416425
15°	410649
20°	378686
25°	308123
30°	187143
35°	64782
40°	18492
45°	8838
50°	3718
55°	1682
60°	1930
65°	1712
70°	1410
75°	1864
80°	1389
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 8838 cd/sqm

TEST NUMBER: P1272429

CATALOG NUMBER: P3AS17R559827DE010 E3CD1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	175.8	12.1
10°-20°	502.7	34.5
20°-30°	560.5	38.5
30°-40°	183.3	12.6
40°-50°	24.2	1.7
50°-60°	5.1	0.4
60°-70°	3.0	0.2
70°-80°	1.9	0.1
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1239.1	85.0
0°-40°	1422.4	97.6
0°-60°	1451.7	99.6
0°-90°	1457.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1457.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1843	
5°	1819	176
15°	1809	503
25°	1274	560
35°	242	183
45°	28	24
55°	4	5
65°	3	3
75°	2	2
85°	0	0
90°	0	

TEST NUMBER: P1272429

CATALOG NUMBER: P3AS17R559827DE010 E3CD1MMS

CANDELA DISTRIBUTION (FULL):

0°	
0°	1842.9
2.5°	1829.7
5°	1818.8
7.5°	1845.1
10°	1870.2
12.5°	1857.1
15°	1808.9
17.5°	1732.3
20°	1622.8
22.5°	1471.7
25°	1273.5
27.5°	1021.6
30°	739.1
32.5°	453.3
35°	242.0
37.5°	122.6
40°	64.6
42.5°	41.6
45°	28.5
47.5°	19.7
50°	10.9
52.5°	6.6
55°	4.4
57.5°	4.4
60°	4.4
62.5°	3.3
65°	3.3
67.5°	2.2
70°	2.2
72.5°	2.2
75°	2.2
77.5°	1.1
80°	1.1
82.5°	1.1
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)