

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1272458

Luminaire Tested: P3AS17R609827DE010 E3CD1MMS

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1272458
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-40)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R609827DE010 E3CD1MMS
Description: 3in Adjustable LED luminaire with, R60 optic, 2700K CCT AND, 98CRI , E3CD1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1415.1 lumens
Efficiency: N/A
Efficacy: 69.4 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.91
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 20.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1272458

CATALOG NUMBER: P3AS17R609827DE010 E3CD1MMS

Luminous Intensity Polar Plot

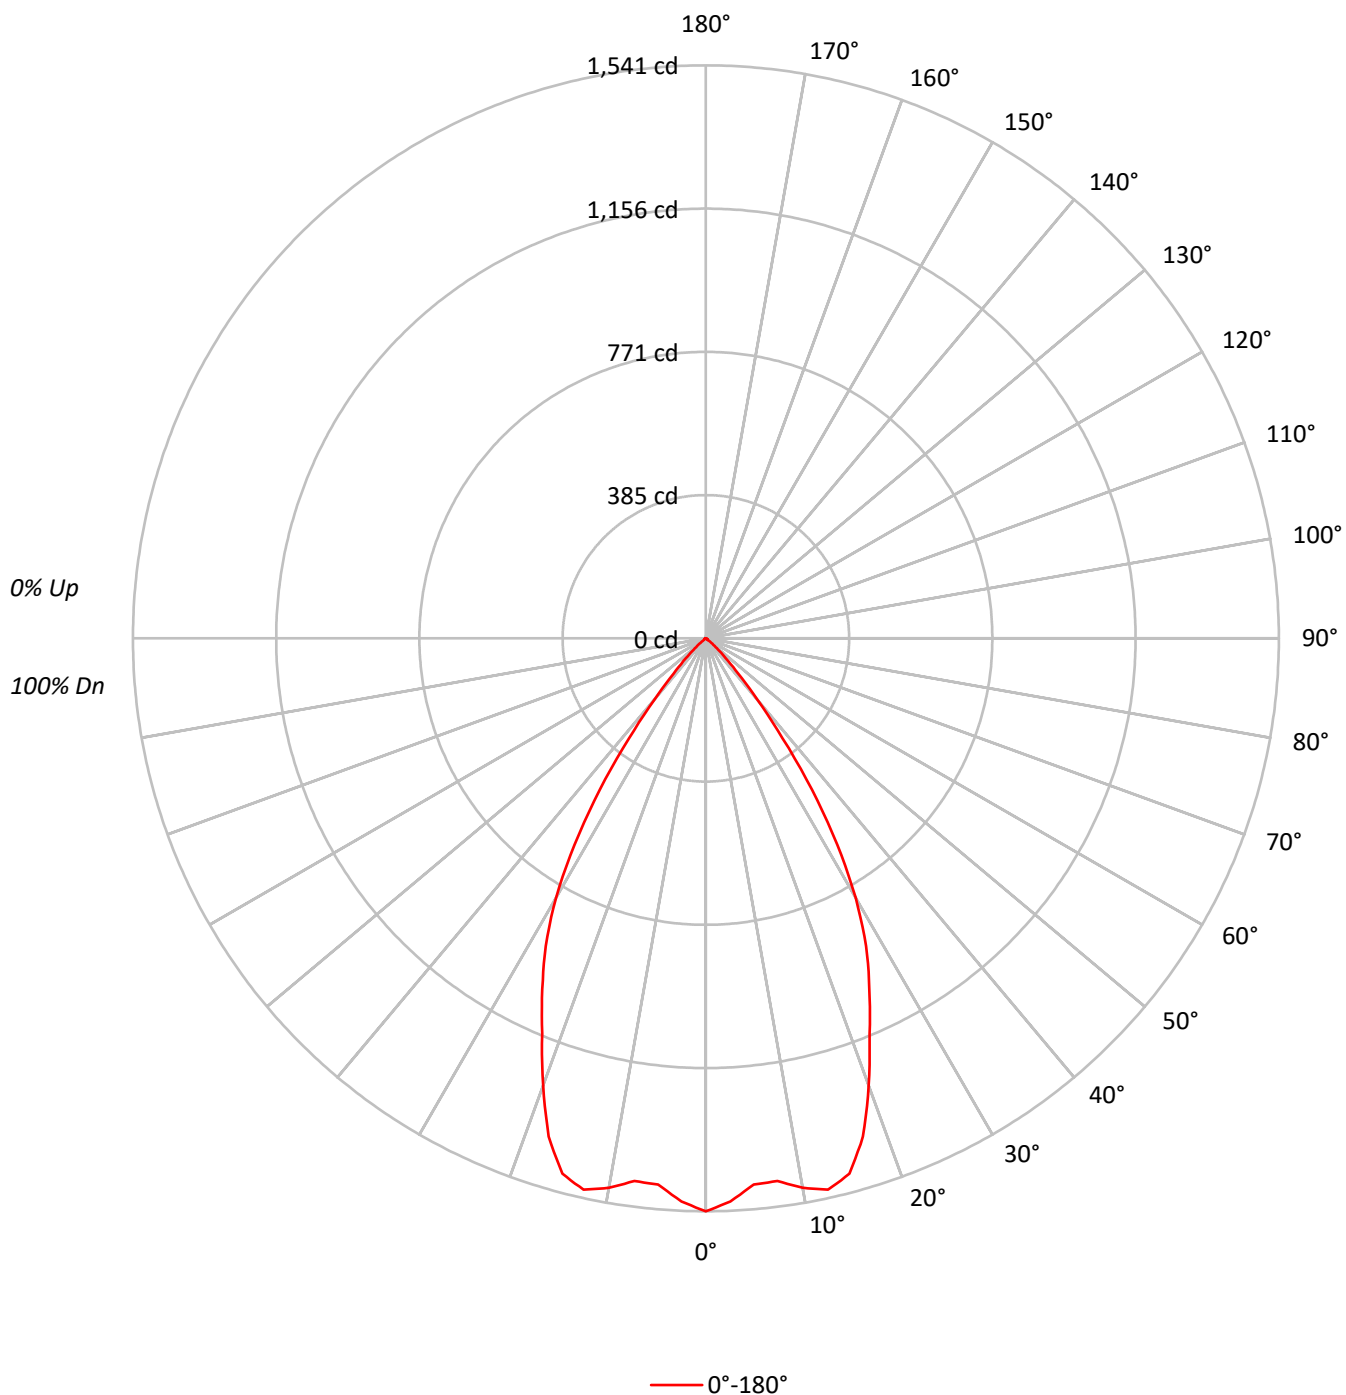

TEST NUMBER: P1272458

CATALOG NUMBER: P3AS17R609827DE010 E3CD1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	114	111	108	106		111	109	106	104		105	103	101		101	100	98		97	96	95
2	108	103	99	96		106	102	98	95		98	95	93		95	93	91		93	91	89
3	103	96	91	88		101	95	90	87		92	89	85		90	87	84		88	85	83
4	98	90	85	81		96	89	84	80		87	83	79		85	81	78		83	80	77
5	93	84	79	74		91	84	78	74		82	77	73		80	76	73		79	75	72
6	88	79	73	69		87	79	73	69		77	72	68		76	71	68		74	70	68
7	84	75	69	64		82	74	68	64		73	68	64		71	67	64		70	66	63
8	80	70	64	60		78	70	64	60		69	64	60		68	63	60		67	62	59
9	76	66	61	57		75	66	60	56		65	60	56		64	59	56		63	59	56
10	72	63	57	53		71	62	57	53		62	56	53		61	56	53		60	56	53

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	337890
5°	324498
10°	334084
15°	338390
20°	298809
25°	251821
30°	204234
35°	133016
40°	61086
45°	23413
50°	7846
55°	2103
60°	1930
65°	1712
70°	1410
75°	1864
80°	1389
85°	2768

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 23413 cd/sqm

TEST NUMBER: P1272458

CATALOG NUMBER: P3AS17R609827DE010 E3CD1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	141.9	10.0
10°-20°	408.2	28.8
20°-30°	476.1	33.6
30°-40°	307.2	21.7
40°-50°	68.8	4.9
50°-60°	6.9	0.5
60°-70°	3.3	0.2
70°-80°	1.9	0.1
80°-90°	0.7	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1026.2	72.5
0°-40°	1333.4	94.2
0°-60°	1409.2	99.6
0°-90°	1415.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1415.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1541	
5°	1474	142
15°	1491	408
25°	1041	476
35°	497	307
45°	76	69
55°	6	7
65°	3	3
75°	2	2
85°	1	1
90°	0	

TEST NUMBER: P1272458

CATALOG NUMBER: P3AS17R609827DE010 E3CD1MMS

CANDELA DISTRIBUTION (FULL):

0°	
0°	1540.9
2.5°	1515.7
5°	1474.2
7.5°	1472.0
10°	1500.4
12.5°	1519.0
15°	1490.6
17.5°	1405.2
20°	1280.5
22.5°	1150.2
25°	1040.8
27.5°	933.5
30°	806.6
32.5°	657.7
35°	496.9
37.5°	339.3
40°	213.4
42.5°	128.0
45°	75.5
47.5°	43.8
50°	23.0
52.5°	7.7
55°	5.5
57.5°	4.4
60°	4.4
62.5°	3.3
65°	3.3
67.5°	3.3
70°	2.2
72.5°	2.2
75°	2.2
77.5°	1.1
80°	1.1
82.5°	1.1
85°	1.1
87.5°	0.0
90°	0.0

(END OF REPORT)