

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1272493

Luminaire Tested: P3AS17R659827DE010 E3D1WMH

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1272493
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-16)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R659827DE010 E3D1WMH
Description: 3in Adjustable LED luminaire with, R65 optic, 2700K CCT AND, 98CRI , E3D1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1306.0 lumens
Efficiency: N/A
Efficacy: 64.0 lumens/watt
Spacing Criteria (0/90/45): 0.92 / 0.92 / 0.88
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 20.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1272493

CATALOG NUMBER: P3AS17R659827DE010 E3D1WMH

Luminous Intensity Polar Plot

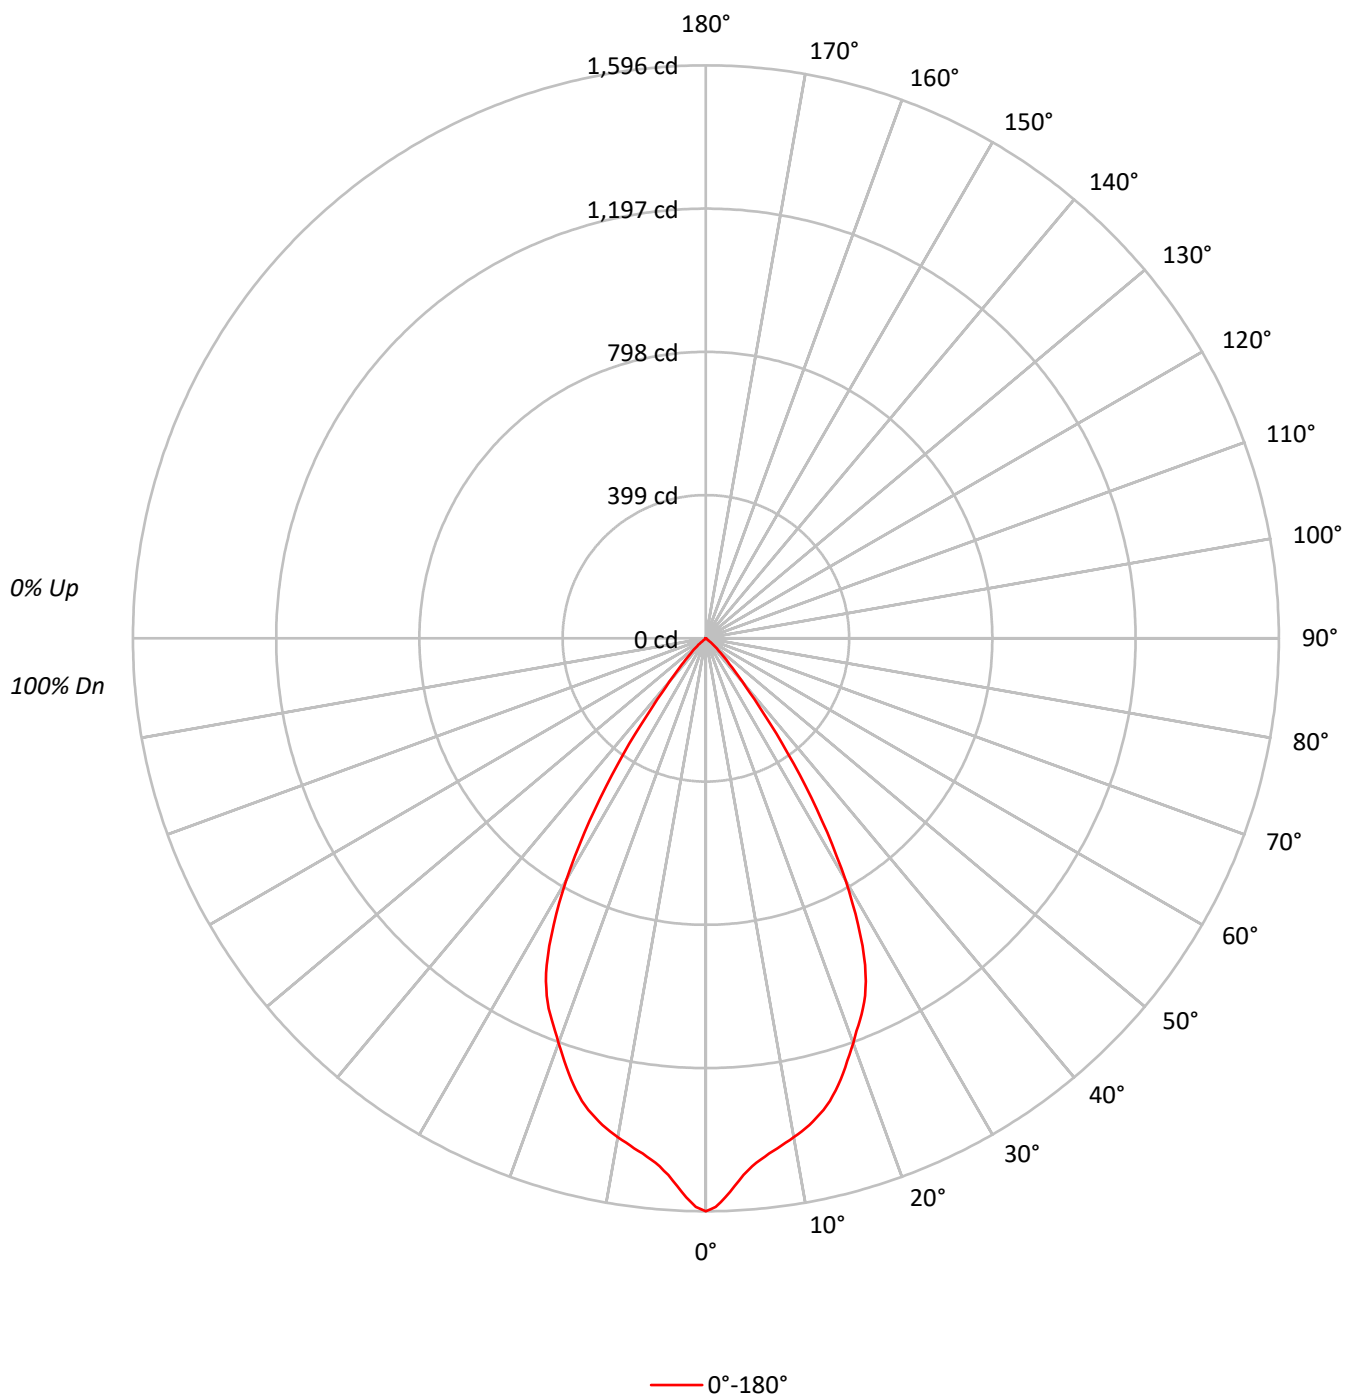



TEST NUMBER: P1272493

CATALOG NUMBER: P3AS17R659827DE010 E3D1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	111	109	106	111	109	107	105	105	103	102		101	100	99		98
2	108	104	100	96	106	102	98	95	99	96	93		96	93	91		93
3	103	97	92	88	101	95	91	88	93	89	86		90	87	85		88
4	98	91	85	81	96	90	85	81	87	83	80		85	82	79		84
5	93	85	79	75	92	84	79	75	82	78	74		81	77	74		79
6	89	80	74	70	87	79	74	70	78	73	69		76	72	69		75
7	84	75	70	65	83	75	69	65	73	69	65		72	68	65		71
8	80	71	65	61	79	71	65	61	69	64	61		68	64	61		67
9	77	67	61	58	76	67	61	57	66	61	57		65	60	57		64
10	73	64	58	54	72	63	58	54	62	57	54		62	57	54		61

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	349950
5°	324939
10°	314223
15°	302817
20°	279954
25°	255087
30°	197094
35°	114251
40°	45342
45°	19320
50°	4571
55°	612
60°	482
65°	259
70°	321
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 19320 cd/sqm

TEST NUMBER: P1272493

CATALOG NUMBER: P3AS17R659827DE010 E3D1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	139.2	10.7
10°-20°	371.7	28.5
20°-30°	470.4	36.0
30°-40°	267.9	20.5
40°-50°	53.2	4.1
50°-60°	2.8	0.2
60°-70°	0.7	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	981.3	75.1
0°-40°	1249.2	95.7
0°-60°	1305.2	99.9
0°-90°	1306.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1306.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1596	
5°	1476	139
15°	1334	372
25°	1054	470
35°	427	268
45°	62	53
55°	2	3
65°	0	1
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1272493

CATALOG NUMBER: P3AS17R659827DE010 E3D1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	1595.9
1°	1584.1
2°	1558.3
3°	1528.3
4°	1498.7
5°	1476.2
6°	1459.6
7°	1446.1
8°	1434.3
9°	1422.5
10°	1411.2
11°	1398.9
12°	1386.0
13°	1370.4
14°	1353.8
15°	1333.9
16°	1310.3
17°	1284.6
18°	1256.6
19°	1227.1
20°	1199.7
21°	1171.8
22°	1146.6
23°	1120.3
24°	1089.7
25°	1054.3
26°	1011.9
27°	960.9
28°	903.4
29°	842.2
30°	778.4
31°	708.0
32°	638.3
32.5°	602.3
33°	567.4
34°	496.5
35°	426.8
36°	362.3
37°	298.5
37.5°	265.7
38°	239.4
39°	193.8
40°	158.4
42.5°	97.7
45°	62.3

TEST NUMBER: P1272493

CATALOG NUMBER: P3AS17R659827DE010 E3D1WMH

CANDELA DISTRIBUTION (continued):

	0°
47.5°	36.5
50°	13.4
52.5°	2.7
55°	1.6
57.5°	1.1
60°	1.1
62.5°	1.1
65°	0.5
67.5°	0.5
70°	0.5
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)