

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1272607

Luminaire Tested: P3AS20R259827D010 E3DL1H

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1272607
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-11)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS20R259827D010 E3DL1H
Description: 3in Adjustable LED luminaire with, R25 optic, 2700K CCT AND, 98CRI , E3DL1H TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1489.0 lumens
Efficiency: N/A
Efficacy: 54.3 lumens/watt
Spacing Criteria (0/90/45): 0.49 / 0.49 / 0.51
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 27.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1272607

CATALOG NUMBER: P3AS20R259827D010 E3DL1H

Luminous Intensity Polar Plot

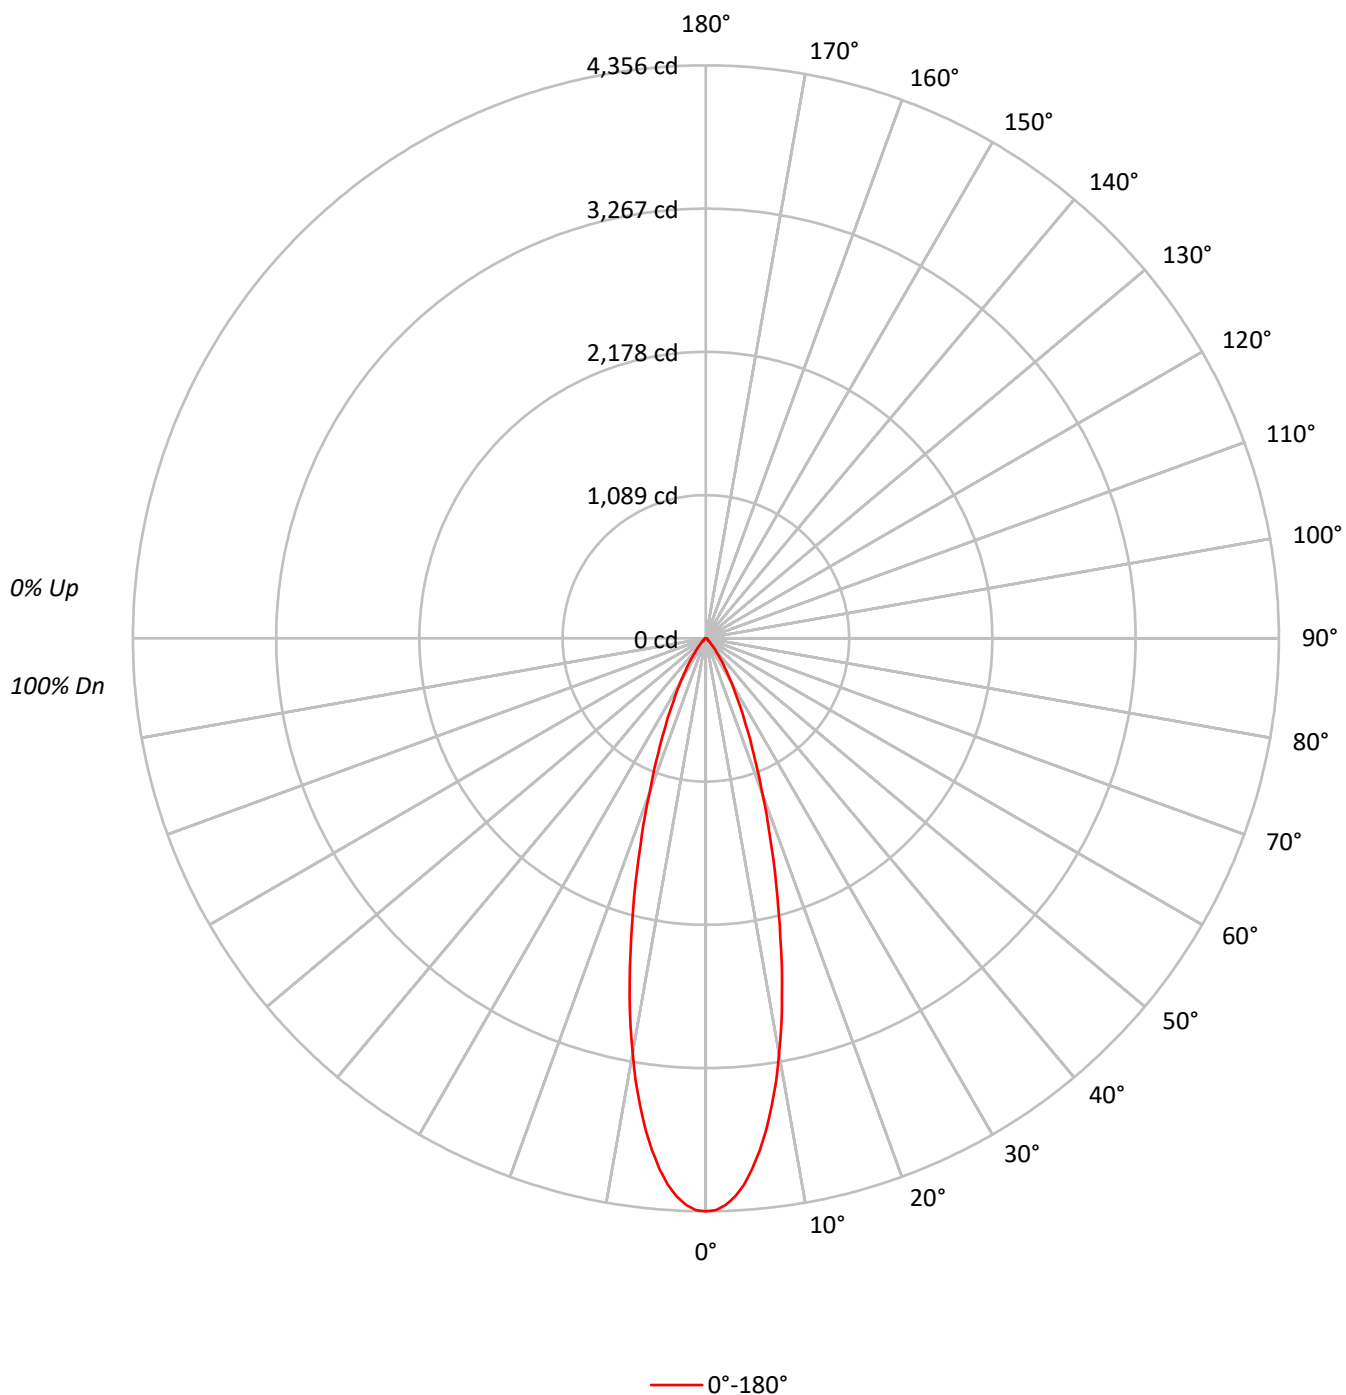

TEST NUMBER: P1272607

CATALOG NUMBER: P3AS20R259827D010 E3DL1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					30					10					0
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	114	112	110	108		112	110	108	106		106	104	103		102	101	100		99	98	97
2	110	105	102	99		107	104	101	98		101	98	96		98	96	94		95	93	92
3	105	100	96	92		103	98	95	91		96	93	90		94	91	89		91	89	87
4	101	95	90	87		99	94	89	86		92	88	85		90	87	84		88	85	83
5	97	90	85	82		96	89	85	81		88	84	81		86	83	80		85	82	79
6	94	86	81	78		92	86	81	78		84	80	77		83	79	77		82	78	76
7	90	83	78	74		89	82	77	74		81	77	74		80	76	73		79	75	73
8	87	79	74	71		86	79	74	71		78	74	71		77	73	70		76	73	70
9	84	76	71	68		83	76	71	68		75	71	68		74	70	68		73	70	67
10	81	73	69	65		80	73	68	65		72	68	65		72	68	65		71	67	65

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	955143
5°	891127
10°	713859
15°	484566
20°	293209
25°	171445
30°	97635
35°	53699
40°	28511
45°	15009
50°	8733
55°	6537
60°	5614
65°	5915
70°	5450
75°	4829
80°	3536
85°	3522

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 15009 cd/sqm

TEST NUMBER: P1272607

CATALOG NUMBER: P3AS20R259827D010 E3DL1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	359.3	24.1
10°-20°	586.8	39.4
20°-30°	335.3	22.5
30°-40°	132.3	8.9
40°-50°	40.6	2.7
50°-60°	16.0	1.1
60°-70°	10.8	0.7
70°-80°	6.0	0.4
80°-90°	1.9	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1281.4	86.1
0°-40°	1413.7	94.9
0°-60°	1470.3	98.7
0°-90°	1489.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1489.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4356	
5°	4048	359
15°	2134	587
25°	709	335
35°	201	132
45°	48	41
55°	17	16
65°	11	11
75°	6	6
85°	1	2
90°	0	

TEST NUMBER: P1272607

CATALOG NUMBER: P3AS20R259827D010 E3DL1H

CANDELA DISTRIBUTION (FULL):

0°	
0°	4355.8
1°	4347.2
2°	4311.7
3°	4249.1
4°	4162.2
5°	4048.4
6°	3914.6
7°	3763.8
8°	3588.8
9°	3409.5
10°	3206.0
11°	3005.4
12°	2784.8
13°	2567.1
14°	2343.7
15°	2134.5
17.5°	1654.9
20°	1256.5
22.5°	943.4
25°	708.6
27.5°	525.1
30°	385.6
32.5°	278.9
35°	200.6
37.5°	142.3
40°	99.6
42.5°	68.3
45°	48.4
47.5°	34.2
50°	25.6
52.5°	19.9
55°	17.1
57.5°	15.7
60°	12.8
62.5°	11.4
65°	11.4
67.5°	10.0
70°	8.5
72.5°	7.1
75°	5.7
77.5°	4.3
80°	2.8
82.5°	2.8
85°	1.4
87.5°	1.4



TEST NUMBER: P1272607

CATALOG NUMBER: P3AS20R259827D010 E3DL1H

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)