

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1272672

Luminaire Tested: P3AS20R359827D010 E3DLD1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1272672
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-18)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS20R359827D010 E3DLD1GPH
Description: 3in Adjustable LED luminaire with, R35 optic, 2700K CCT AND, 98CRI , E3DLD1GPH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 564.0 lumens
Efficiency: N/A
Efficacy: 20.6 lumens/watt
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.87
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 27.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1272672
CATALOG NUMBER: P3AS20R359827D010 E3DLD1GPH

Luminous Intensity Polar Plot

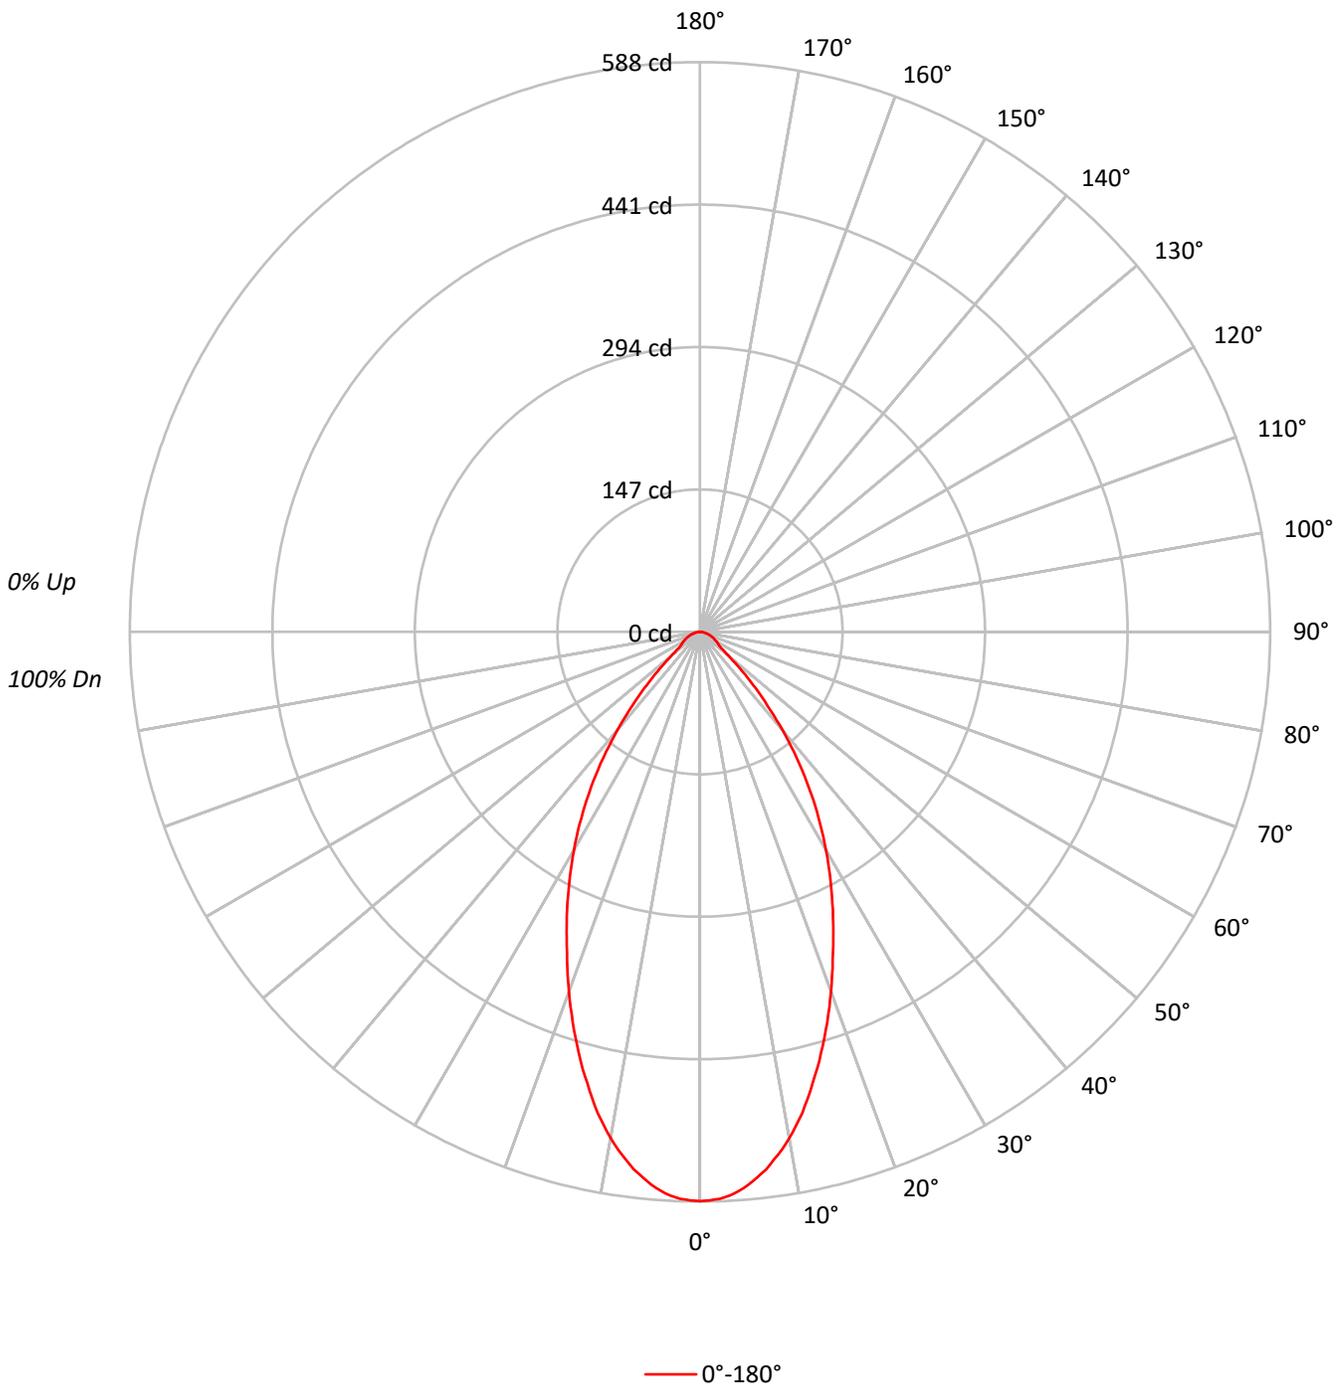



TEST NUMBER: P1272672
 CATALOG NUMBER: P3AS20R359827D010 E3DLD1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	112	109	106	104	110	107	104	102	103	101	99	99	98	96	96	94	93	91			91
2	106	100	96	92	104	98	94	91	95	92	89	92	89	87	89	87	85	83			83
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76			76
4	94	85	79	74	92	84	78	74	82	77	73	80	75	72	78	74	71	69			69
5	89	79	73	68	87	78	72	67	76	71	67	75	70	66	73	69	66	64			64
6	84	74	67	62	82	73	67	62	71	66	61	70	65	61	68	64	61	59			59
7	79	69	62	57	78	68	62	57	67	61	57	65	60	57	64	60	56	55			55
8	75	64	58	53	74	64	57	53	63	57	53	62	56	53	61	56	52	51			51
9	71	60	54	50	70	60	54	50	59	53	49	58	53	49	57	52	49	48			48
10	67	57	51	46	66	56	50	46	56	50	46	55	50	46	54	49	46	45			45

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	128827
5°	126106
10°	118101
15°	106017
20°	92221
25°	78585
30°	65833
35°	52414
40°	37900
45°	24002
50°	13066
55°	9061
60°	8552
65°	7939
70°	7565
75°	6524
80°	6188
85°	5284

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 24002 cd/sqm



TEST NUMBER: P1272672
 CATALOG NUMBER: P3AS20R359827D010 E3DLD1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	53.3	9.5
10°-20°	129.9	23.0
20°-30°	148.9	26.4
30°-40°	121.5	21.5
40°-50°	61.3	10.9
50°-60°	22.8	4.0
60°-70°	15.2	2.7
70°-80°	8.5	1.5
80°-90°	2.6	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	332.2	58.9
0°-40°	453.7	80.4
0°-60°	537.7	95.3
0°-90°	564.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	564.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	588	
5°	573	53
15°	467	130
25°	325	149
35°	196	122
45°	77	61
55°	24	23
65°	15	15
75°	8	8
85°	2	3
90°	0	



TEST NUMBER: P1272672
CATALOG NUMBER: P3AS20R359827D010 E3DLD1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	587.5
1°	586.8
2°	585.4
3°	582.7
4°	578.5
5°	572.9
6°	565.9
7°	559.0
8°	549.9
9°	540.8
10°	530.4
11°	519.2
12°	507.4
13°	494.1
14°	480.2
15°	467.0
17.5°	431.4
20°	395.2
22.5°	358.2
25°	324.8
27.5°	292.0
30°	260.0
32.5°	227.9
35°	195.8
37.5°	163.8
40°	132.4
42.5°	103.1
45°	77.4
47.5°	55.8
50°	38.3
52.5°	27.9
55°	23.7
57.5°	21.6
60°	19.5
62.5°	17.4
65°	15.3
67.5°	13.2
70°	11.8
72.5°	9.8
75°	7.7
77.5°	6.3
80°	4.9
82.5°	3.5
85°	2.1
87.5°	1.4



TEST NUMBER: P1272672
CATALOG NUMBER: P3AS20R359827D010 E3DLD1GPH

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)