

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1272793

Luminaire Tested: P3AS20R559827D010 E3DLP1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1272793
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-33)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS20R559827D010 E3DLP1GPH
Description: 3in Adjustable LED luminaire with, R55 optic, 2700K CCT AND, 98CRI , E3DLP1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 507.0 lumens
Efficiency: N/A
Efficacy: 18.5 lumens/watt
Spacing Criteria (0/90/45): 0.77 / 0.77 / 0.8
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 27.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1272793

CATALOG NUMBER: P3AS20R559827D010 E3DLP1GPH

Luminous Intensity Polar Plot

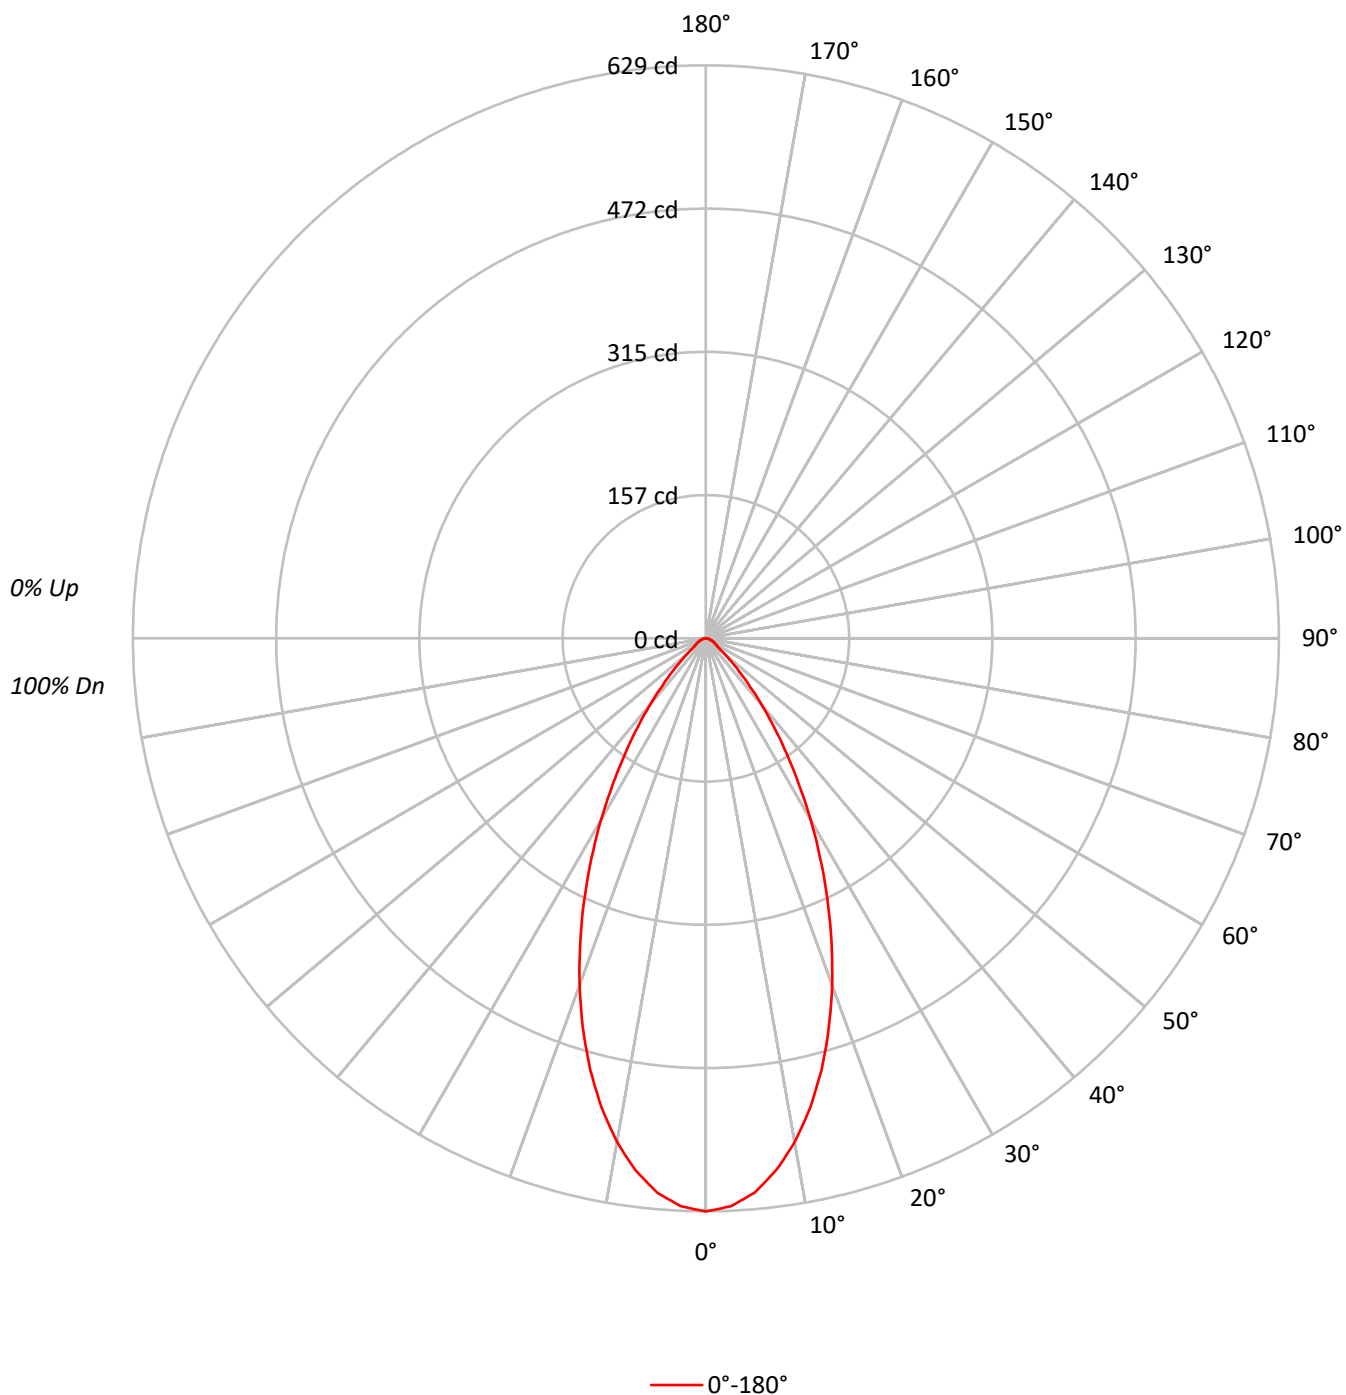

TEST NUMBER: P1272793

CATALOG NUMBER: P3AS20R559827D010 E3DLP1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	105	110	108	105	103	104	102	100		100	98	97		97
2	107	102	97	94	105	100	96	93	97	93	91		94	91	89		91
3	101	94	89	85	99	93	88	84	90	86	83		88	84	81		85
4	96	88	82	77	94	87	81	77	84	80	76		82	78	75		80
5	91	82	76	71	89	81	75	71	79	74	70		77	73	70		76
6	86	77	70	66	84	76	70	66	74	69	65		73	68	65		72
7	82	72	66	61	80	71	65	61	70	65	61		69	64	60		68
8	78	68	62	57	76	67	61	57	66	61	57		65	60	57		64
9	74	64	58	54	73	63	58	54	62	57	53		62	57	53		61
10	70	60	55	51	69	60	54	50	59	54	50		58	54	50		58

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	137928
5°	134470
10°	125003
15°	111329
20°	94602
25°	76335
30°	58211
35°	41385
40°	27308
45°	16188
50°	9518
55°	5849
60°	5175
65°	4722
70°	4039
75°	3558
80°	3536
85°	3522

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 16188 cd/sqm

TEST NUMBER: P1272793

CATALOG NUMBER: P3AS20R559827D010 E3DLP1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	56.7	11.2
10°-20°	136.0	26.8
20°-30°	144.0	28.4
30°-40°	97.3	19.2
40°-50°	42.6	8.4
50°-60°	15.3	3.0
60°-70°	9.0	1.8
70°-80°	4.7	0.9
80°-90°	1.5	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	336.7	66.4
0°-40°	433.9	85.6
0°-60°	491.8	97.0
0°-90°	507.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	507.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	629	
5°	611	57
15°	490	136
25°	316	144
35°	155	97
45°	52	43
55°	15	15
65°	9	9
75°	4	5
85°	1	2
90°	0	

TEST NUMBER: P1272793

CATALOG NUMBER: P3AS20R559827D010 E3DLP1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	629.0
2.5°	624.1
5°	610.9
7.5°	589.3
10°	561.4
12.5°	528.0
15°	490.4
17.5°	448.6
20°	405.4
22.5°	360.1
25°	315.5
27.5°	271.6
30°	229.9
32.5°	190.2
35°	154.6
37.5°	122.6
40°	95.4
42.5°	71.7
45°	52.2
47.5°	38.3
50°	27.9
52.5°	19.5
55°	15.3
57.5°	13.9
60°	11.8
62.5°	10.4
65°	9.1
67.5°	7.7
70°	6.3
72.5°	5.6
75°	4.2
77.5°	3.5
80°	2.8
82.5°	2.1
85°	1.4
87.5°	0.7
90°	0.0

(END OF REPORT)