

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1272928

Luminaire Tested: P3AS02R209830DE010 E3DL1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1272928
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-7)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R209830DE010 E3DL1MW
Description: 3in Adjustable LED luminaire with, R20 optic, 3000K CCT AND, 98CRI , E3DL1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 185.0 lumens
Efficiency: N/A
Efficacy: 51.4 lumens/watt
Spacing Criteria (0/90/45): 0.44 / 0.44 / 0.46
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1272928

CATALOG NUMBER: P3AS02R209830DE010 E3DL1MW

Luminous Intensity Polar Plot

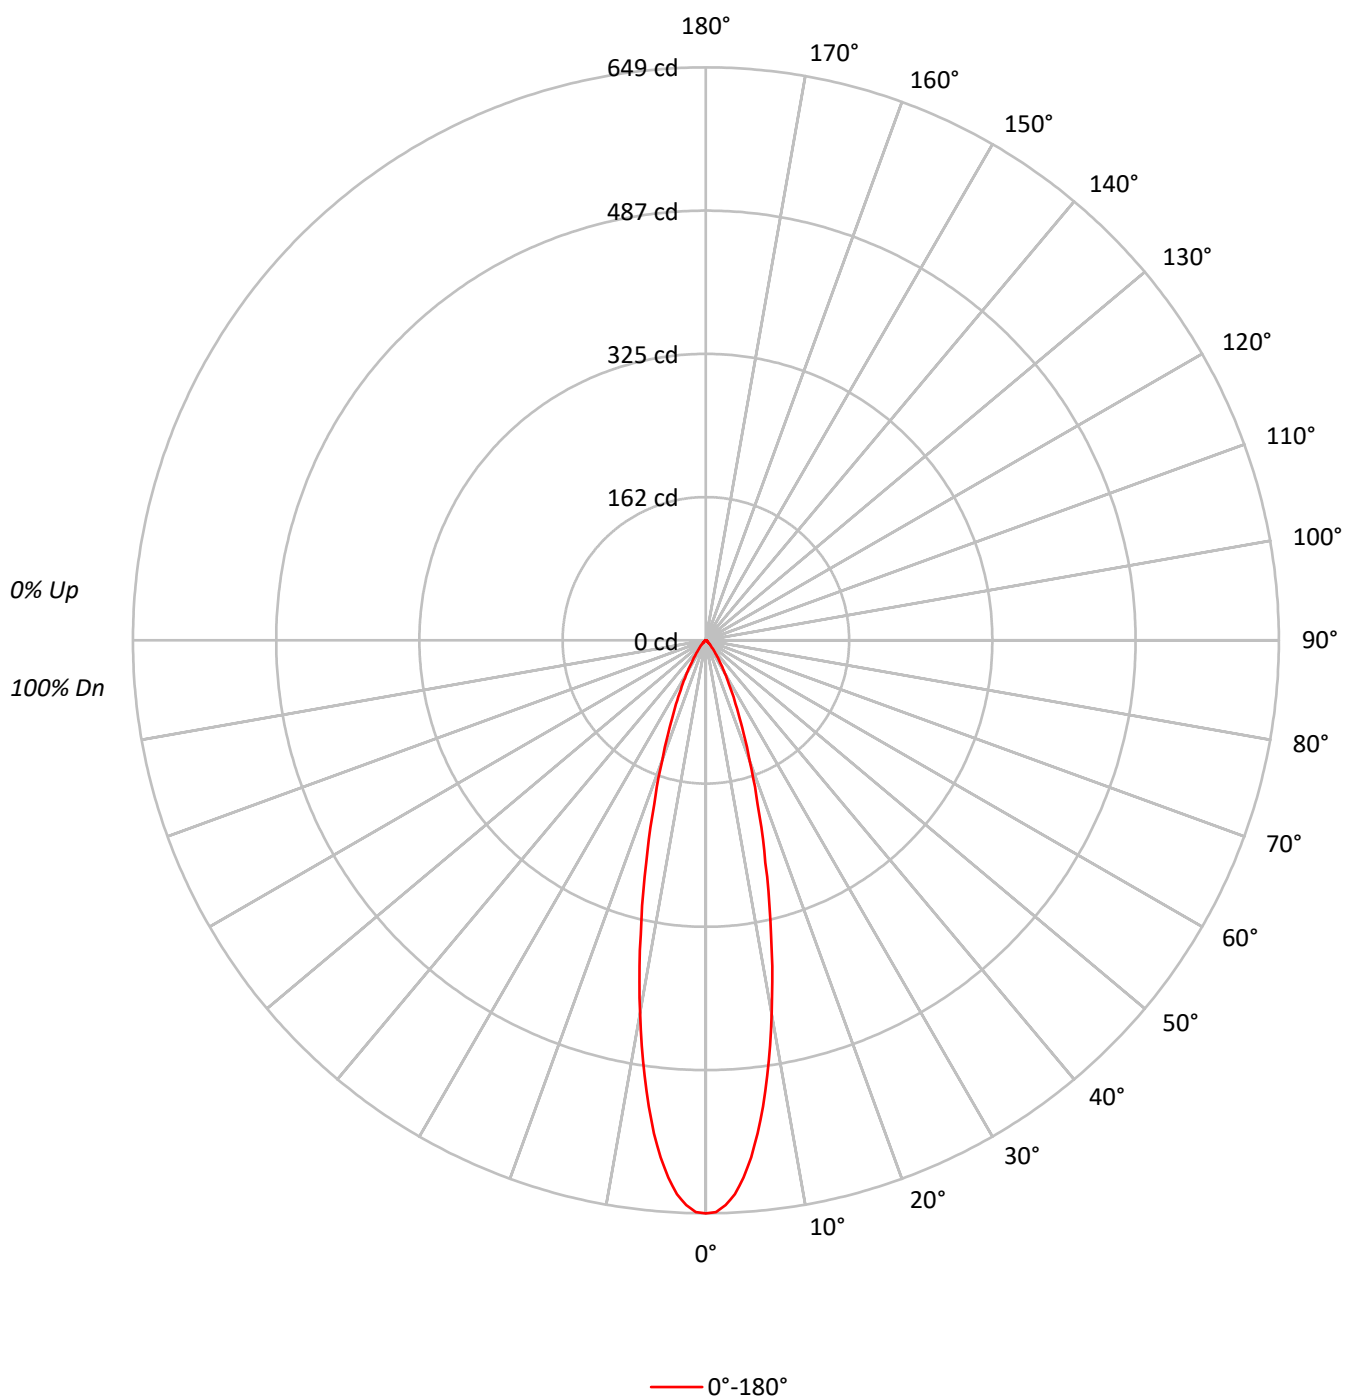

TEST NUMBER: P1272928

CATALOG NUMBER: P3AS02R209830DE010 E3DL1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	114	112	110	108		112	110	108	106		106	104	103		102	101	100		99	98	97
2	110	106	102	100		108	104	101	98		101	98	96		98	96	94		95	94	92
3	106	100	96	93		104	99	95	92		97	93	91		94	92	89		92	90	88
4	102	96	91	88		100	95	90	87		92	89	86		91	88	85		89	86	84
5	98	91	87	83		97	90	86	83		89	85	82		87	84	81		86	83	81
6	95	87	83	79		93	87	82	79		85	81	78		84	81	78		83	80	77
7	91	84	79	76		90	83	79	76		82	78	75		81	78	75		80	77	75
8	88	81	76	73		87	80	76	73		79	75	72		78	75	72		77	74	72
9	85	78	73	70		85	77	73	70		77	73	70		76	72	69		75	72	69
10	83	75	71	68		82	75	70	67		74	70	67		73	70	67		73	69	67

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	142335
5°	129386
10°	95634
15°	59160
20°	33790
25°	19283
30°	10812
35°	5889
40°	3235
45°	1768
50°	1023
55°	765
60°	702
65°	675
70°	577
75°	593
80°	505
85°	503

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 1768 cd/sqm

TEST NUMBER: P1272928

CATALOG NUMBER: P3AS02R209830DE010 E3DL1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	50.9	27.5
10°-20°	72.7	39.3
20°-30°	37.9	20.5
30°-40°	14.7	7.9
40°-50°	4.7	2.6
50°-60°	1.9	1.0
60°-70°	1.2	0.7
70°-80°	0.7	0.4
80°-90°	0.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	161.5	87.3
0°-40°	176.2	95.2
0°-60°	182.8	98.8
0°-90°	185.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	185.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	649	
5°	588	51
15°	261	73
25°	80	38
35°	22	15
45°	6	5
55°	2	2
65°	1	1
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1272928

CATALOG NUMBER: P3AS02R209830DE010 E3DL1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	649.1
1°	647.9
2°	640.2
3°	628.4
4°	610.1
5°	587.8
6°	561.4
7°	532.0
8°	498.1
9°	465.0
10°	429.5
12.5°	341.4
15°	260.6
17.5°	195.0
20°	144.8
22.5°	107.2
25°	79.7
27.5°	58.8
30°	42.7
32.5°	30.9
35°	22.0
37.5°	15.9
40°	11.3
42.5°	8.0
45°	5.7
47.5°	4.1
50°	3.0
52.5°	2.3
55°	2.0
57.5°	1.8
60°	1.6
62.5°	1.4
65°	1.3
67.5°	1.1
70°	0.9
72.5°	0.9
75°	0.7
77.5°	0.5
80°	0.4
82.5°	0.4
85°	0.2
87.5°	0.2
90°	0.0

(END OF REPORT)