

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1272951

Luminaire Tested: P3AS02R259830DE010 E3DL1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1272951
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-11)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R259830DE010 E3DL1GPH
Description: 3in Adjustable LED luminaire with, R25 optic, 3000K CCT AND, 98CRI , E3DL1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 92.0 lumens
Efficiency: N/A
Efficacy: 25.6 lumens/watt
Spacing Criteria (0/90/45): 0.49 / 0.49 / 0.51
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1272951

CATALOG NUMBER: P3AS02R259830DE010 E3DL1GPH

Luminous Intensity Polar Plot

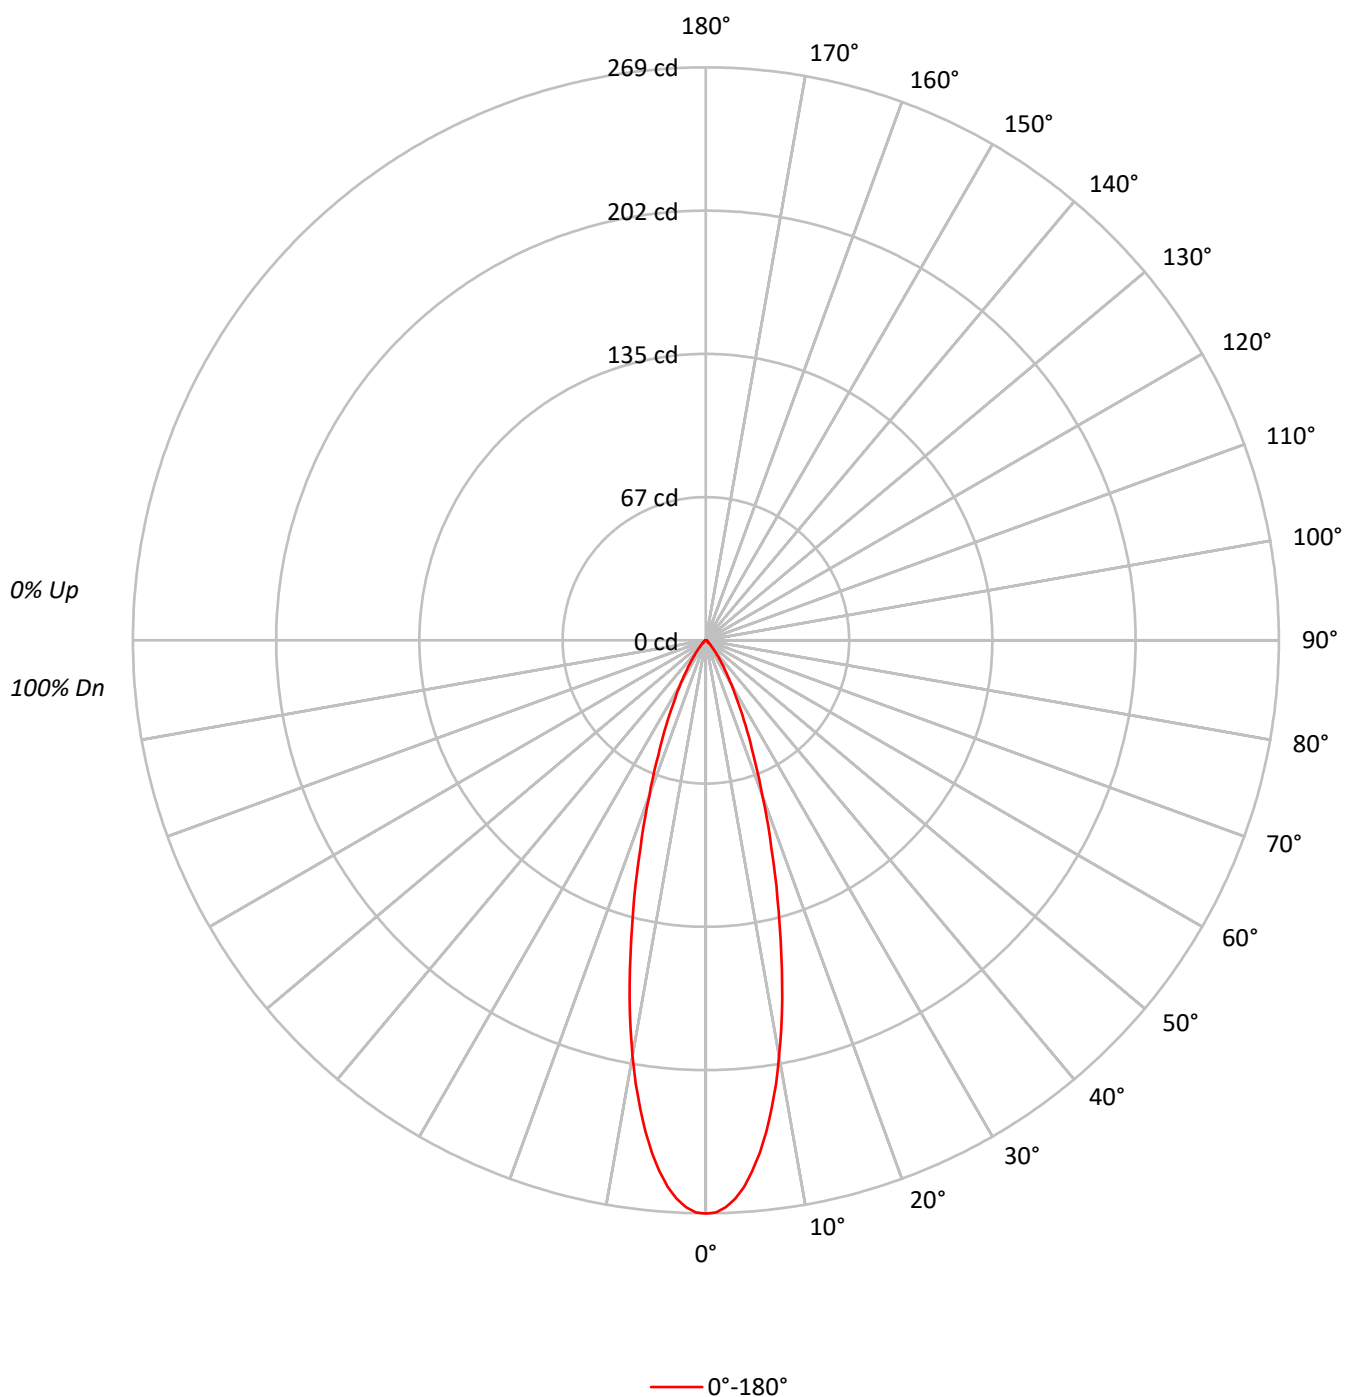

TEST NUMBER: P1272951

CATALOG NUMBER: P3AS02R259830DE010 E3DL1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	114	112	110	108		112	110	108	106		106	104	103		102	101	100		99	98	97
2	110	105	102	99		107	104	101	98		101	98	96		98	96	94		95	93	92
3	105	100	96	92		103	98	95	91		96	93	90		94	91	89		91	89	87
4	101	95	90	87		99	94	89	86		92	88	85		90	87	84		88	85	83
5	97	90	85	82		96	89	85	81		88	84	81		86	83	80		85	82	79
6	94	86	81	78		92	86	81	77		84	80	77		83	79	76		82	78	76
7	90	83	78	74		89	82	77	74		81	77	74		80	76	73		79	75	73
8	87	79	74	71		86	79	74	71		78	74	71		77	73	70		76	73	70
9	84	76	71	68		83	76	71	68		75	71	68		74	70	68		73	70	67
10	81	73	69	65		80	73	68	65		72	68	65		72	68	65		71	67	65

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	59008
5°	55052
10°	44110
15°	29943
20°	18108
25°	10597
30°	6026
35°	3319
40°	1775
45°	930
50°	546
55°	421
60°	351
65°	363
70°	321
75°	339
80°	253
85°	252

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 930 cd/sqm

TEST NUMBER: P1272951

CATALOG NUMBER: P3AS02R259830DE010 E3DL1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	22.2	24.1
10°-20°	36.3	39.4
20°-30°	20.7	22.5
30°-40°	8.2	8.9
40°-50°	2.5	2.7
50°-60°	1.0	1.1
60°-70°	0.7	0.7
70°-80°	0.4	0.4
80°-90°	0.1	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	79.2	86.0
0°-40°	87.3	94.9
0°-60°	90.9	98.7
0°-90°	92.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	92.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	269	
5°	250	22
15°	132	36
25°	44	21
35°	12	8
45°	3	3
55°	1	1
65°	1	1
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1272951

CATALOG NUMBER: P3AS02R259830DE010 E3DL1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	269.1
1°	268.6
2°	266.4
3°	262.5
4°	257.2
5°	250.1
6°	241.9
7°	232.6
8°	221.7
9°	210.7
10°	198.1
11°	185.7
12°	172.1
13°	158.6
14°	144.8
15°	131.9
17.5°	102.3
20°	77.6
22.5°	58.3
25°	43.8
27.5°	32.4
30°	23.8
32.5°	17.2
35°	12.4
37.5°	8.8
40°	6.2
42.5°	4.2
45°	3.0
47.5°	2.1
50°	1.6
52.5°	1.2
55°	1.1
57.5°	1.0
60°	0.8
62.5°	0.7
65°	0.7
67.5°	0.6
70°	0.5
72.5°	0.4
75°	0.4
77.5°	0.3
80°	0.2
82.5°	0.2
85°	0.1
87.5°	0.1



TEST NUMBER: P1272951
CATALOG NUMBER: P3AS02R259830DE010 E3DL1GPH

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)