

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1273124

Luminaire Tested: P3AS02R559830DE010 E3D1WH

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1273124
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-14)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R559830DE010 E3D1WH
Description: 3in Adjustable LED luminaire with, R55 optic, 3000K CCT AND, 98CRI , E3D1WH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 231.0 lumens
Efficiency: N/A
Efficacy: 64.2 lumens/watt
Spacing Criteria (0/90/45): 0.93 / 0.93 / 0.82
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1273124
CATALOG NUMBER: P3AS02R559830DE010 E3D1WH

Luminous Intensity Polar Plot

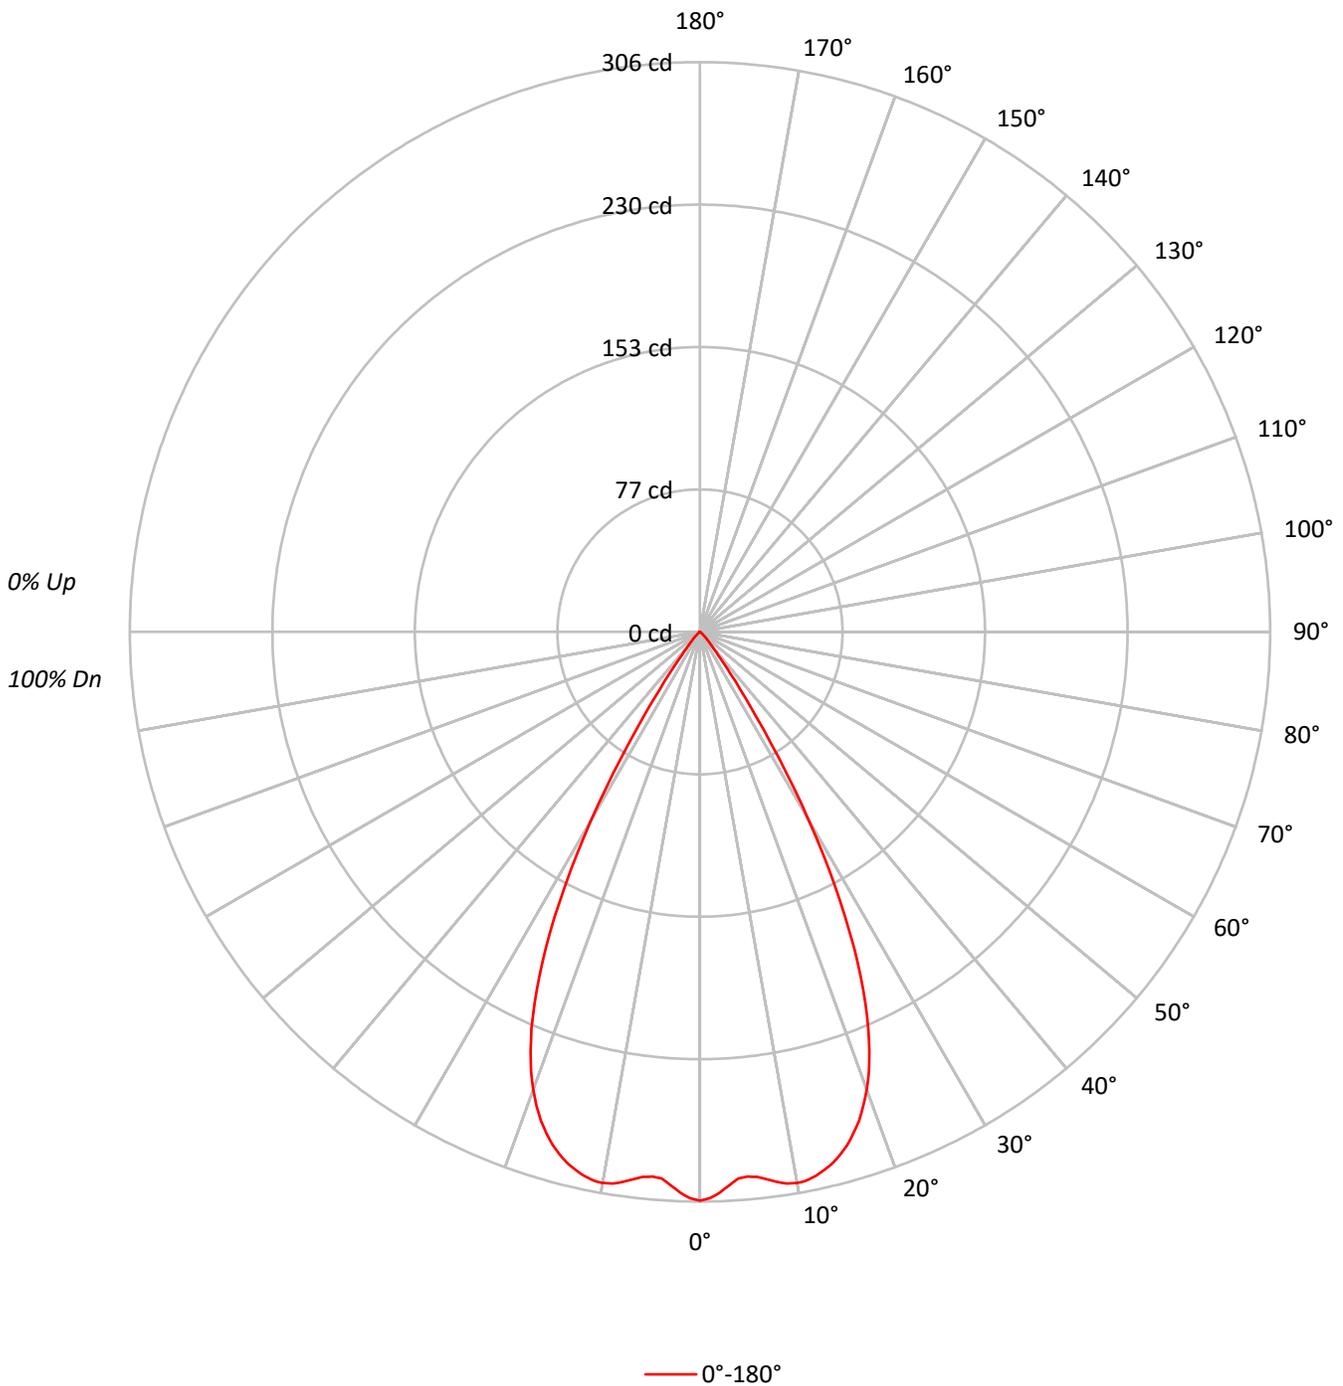



TEST NUMBER: P1273124
 CATALOG NUMBER: P3AS02R559830DE010 E3D1WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	111	109	107	112	109	107	105	105	104	102	102	100	99	98	97	96	95	95	95	95
2	109	105	101	98	107	103	100	97	100	97	95	97	95	93	94	92	91	89	89	89	89
3	104	98	94	90	102	97	93	90	95	91	88	92	89	87	90	88	86	84	84	84	84
4	100	93	88	84	98	92	87	84	90	86	83	88	84	82	86	83	81	79	79	79	79
5	95	88	82	79	94	87	82	78	85	81	78	84	80	77	82	79	76	75	75	75	75
6	91	83	78	74	90	82	77	74	81	76	73	80	76	73	78	75	72	71	71	71	71
7	87	79	73	70	86	78	73	69	77	72	69	76	72	69	75	71	68	67	67	67	67
8	83	75	69	66	82	74	69	65	73	69	65	72	68	65	71	68	65	63	63	63	63
9	80	71	66	62	79	71	66	62	70	65	62	69	65	62	68	64	61	60	60	60	60
10	77	68	62	59	76	67	62	59	67	62	59	66	62	59	65	61	58	57	57	57	57

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	66990
5°	64627
10°	66933
15°	65994
20°	61069
25°	49382
30°	29599
35°	10038
40°	2777
45°	1209
50°	375
55°	76
60°	44
65°	52
70°	64
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 1209 cd/sqm



TEST NUMBER: P1273124
 CATALOG NUMBER: P3AS02R559830DE010 E3D1WH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	28.4	12.3
10°-20°	80.9	35.0
20°-30°	89.9	38.9
30°-40°	28.0	12.1
40°-50°	3.4	1.5
50°-60°	0.3	0.1
60°-70°	0.1	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	199.3	86.3
0°-40°	227.3	98.4
0°-60°	230.9	100.0
0°-90°	231.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	231.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	306	
5°	294	28
15°	291	81
25°	204	90
35°	38	28
45°	4	3
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1273124
CATALOG NUMBER: P3AS02R559830DE010 E3D1WH

CANDELA DISTRIBUTION (FULL):

0°	
0°	305.5
1°	304.3
2°	301.4
3°	297.7
4°	294.3
5°	293.6
6°	294.4
7°	296.3
8°	298.4
9°	300.0
10°	300.6
11°	300.2
12°	298.8
13°	296.6
14°	294.1
15°	290.7
16°	286.7
17°	281.7
18°	276.1
19°	269.3
20°	261.7
21°	253.0
22°	242.7
23°	231.4
24°	218.4
25°	204.1
26°	188.4
27°	171.7
28°	153.9
29°	135.6
30°	116.9
31°	98.1
32°	79.8
32.5°	71.6
33°	63.2
34°	48.9
35°	37.5
36°	28.5
37°	21.1
37.5°	18.1
38°	15.7
39°	11.9
40°	9.7
42.5°	6.1
45°	3.9



TEST NUMBER: P1273124
CATALOG NUMBER: P3AS02R559830DE010 E3D1WH

CANDELA DISTRIBUTION (continued):

	0°
47.5°	2.4
50°	1.1
52.5°	0.4
55°	0.2
57.5°	0.1
60°	0.1
62.5°	0.1
65°	0.1
67.5°	0.1
70°	0.1
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)