

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1273148

Luminaire Tested: P3AS02R609830DE010 E3CD1MMS

Issue Date: 1/30/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1273148  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-40)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS02R609830DE010 E3CD1MMS  
Description: 3in Adjustable LED luminaire with, R60 optic, 3000K CCT AND, 98CRI , E3CD1MMS TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 231.0 lumens  
Efficiency: N/A  
Efficacy: 64.2 lumens/watt  
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.91  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 3.6  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1273148

CATALOG NUMBER: P3AS02R609830DE010 E3CD1MMS

### Luminous Intensity Polar Plot

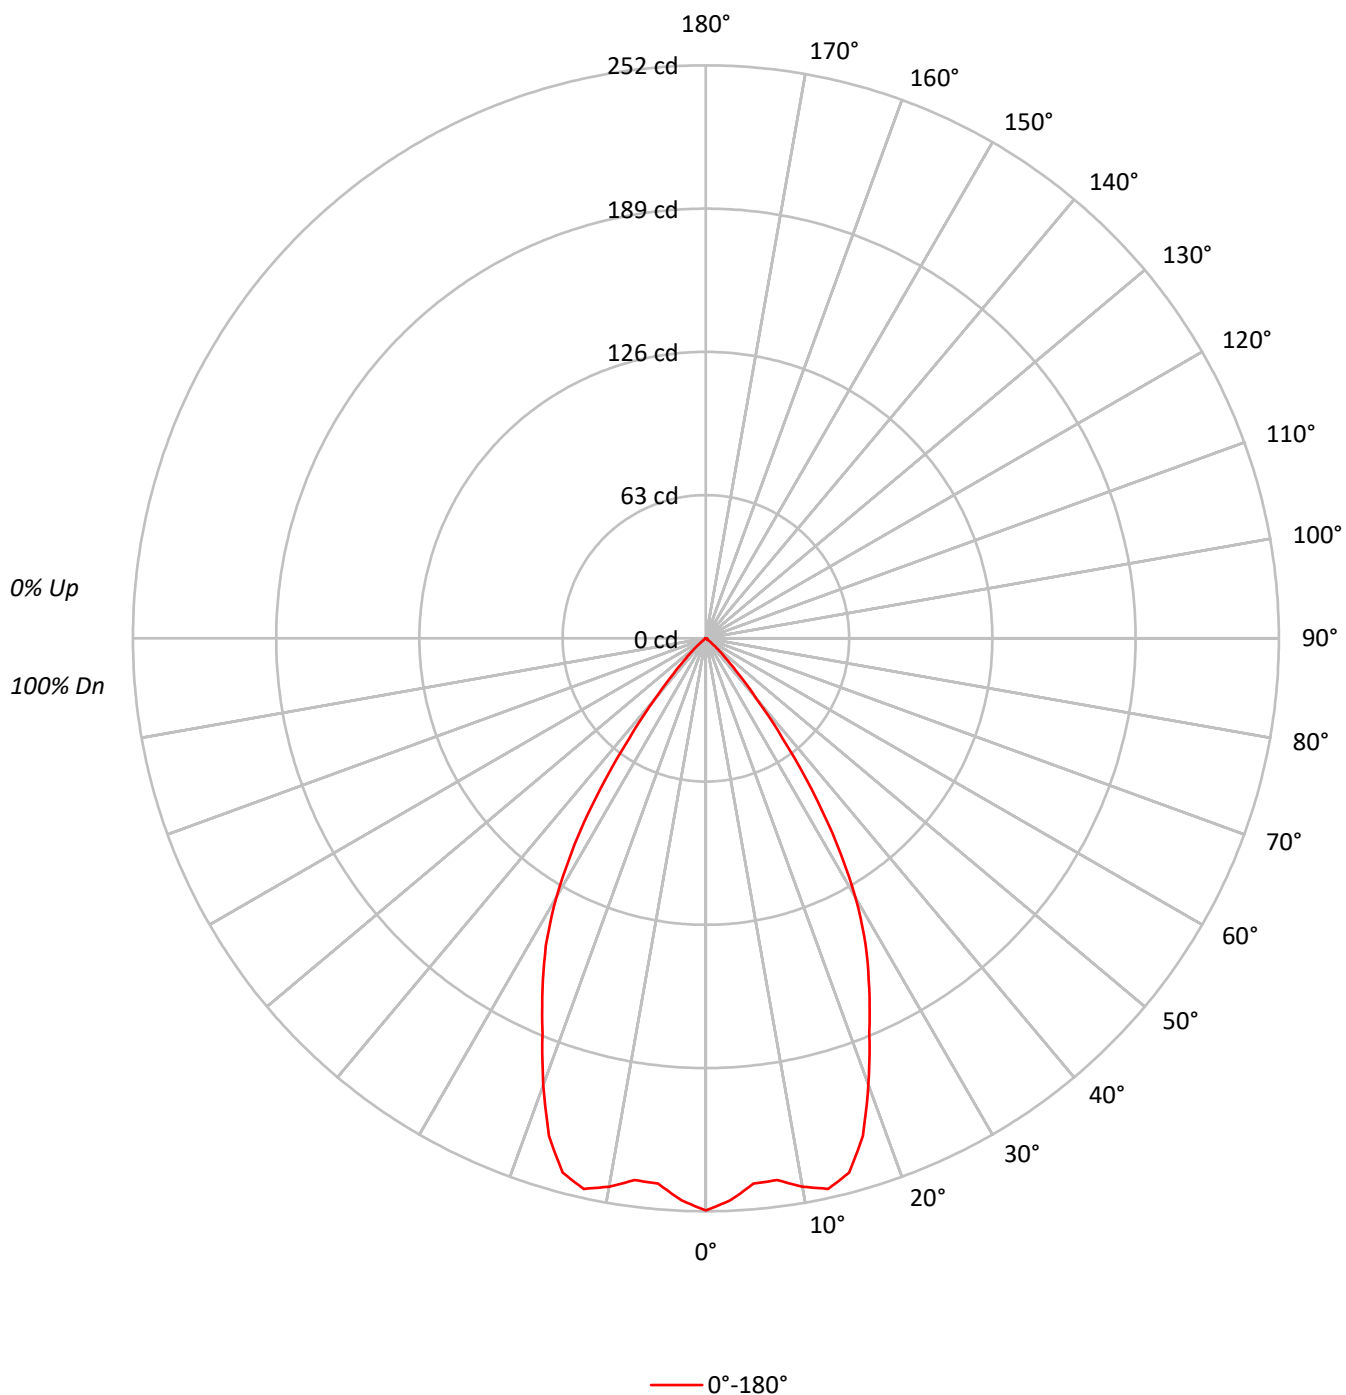

TEST NUMBER: P1273148

CATALOG NUMBER: P3AS02R609830DE010 E3CD1MMS

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|-----|--|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |  | 20  |     |     |  | 20  |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |  | 30  |     |     |  | 10  |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  |
| RCR |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 102 |
| 1   | 114 | 111 | 108 | 106 | 111 | 109 | 106 | 104 | 105 | 103 | 101 |  | 101 | 100 | 98  |  | 97  |
| 2   | 108 | 103 | 99  | 96  | 106 | 102 | 98  | 95  | 98  | 95  | 93  |  | 95  | 93  | 91  |  | 93  |
| 3   | 103 | 96  | 91  | 88  | 101 | 95  | 90  | 87  | 92  | 89  | 85  |  | 90  | 87  | 84  |  | 88  |
| 4   | 98  | 90  | 85  | 80  | 96  | 89  | 84  | 80  | 87  | 82  | 79  |  | 85  | 81  | 78  |  | 83  |
| 5   | 93  | 84  | 79  | 74  | 91  | 84  | 78  | 74  | 82  | 77  | 73  |  | 80  | 76  | 73  |  | 79  |
| 6   | 88  | 79  | 73  | 69  | 87  | 78  | 73  | 69  | 77  | 72  | 68  |  | 76  | 71  | 68  |  | 74  |
| 7   | 84  | 75  | 69  | 64  | 82  | 74  | 68  | 64  | 73  | 68  | 64  |  | 71  | 67  | 64  |  | 70  |
| 8   | 80  | 70  | 64  | 60  | 78  | 70  | 64  | 60  | 69  | 64  | 60  |  | 68  | 63  | 60  |  | 67  |
| 9   | 76  | 66  | 61  | 57  | 75  | 66  | 60  | 56  | 65  | 60  | 56  |  | 64  | 59  | 56  |  | 63  |
| 10  | 72  | 63  | 57  | 53  | 71  | 62  | 57  | 53  | 62  | 56  | 53  |  | 61  | 56  | 53  |  | 60  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |       |
|-----|-------|
|     | 0°    |
| 0°  | 55171 |
| 5°  | 52982 |
| 10° | 54530 |
| 15° | 55233 |
| 20° | 48771 |
| 25° | 41107 |
| 30° | 33347 |
| 35° | 21710 |
| 40° | 9962  |
| 45° | 3814  |
| 50° | 1296  |
| 55° | 344   |
| 60° | 307   |
| 65° | 259   |
| 70° | 256   |
| 75° | 339   |
| 80° | 253   |
| 85° | 503   |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3814 cd/sqm

TEST NUMBER: P1273148

CATALOG NUMBER: P3AS02R609830DE010 E3CD1MMS

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 23.2   | 10.0      |
| 10°-20°   | 66.6   | 28.8      |
| 20°-30°   | 77.7   | 33.6      |
| 30°-40°   | 50.2   | 21.7      |
| 40°-50°   | 11.2   | 4.9       |
| 50°-60°   | 1.1    | 0.5       |
| 60°-70°   | 0.5    | 0.2       |
| 70°-80°   | 0.3    | 0.1       |
| 80°-90°   | 0.1    | 0.1       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| <hr/>     |        |           |
| 0°-30°    | 167.5  | 72.5      |
| 0°-40°    | 217.7  | 94.2      |
| 0°-60°    | 230.0  | 99.6      |
| 0°-90°    | 231.0  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 231.0  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°  | Flux |
|-----|-----|------|
| 0°  | 252 |      |
| 5°  | 241 | 23   |
| 15° | 243 | 67   |
| 25° | 170 | 78   |
| 35° | 81  | 50   |
| 45° | 12  | 11   |
| 55° | 1   | 1    |
| 65° | 0   | 1    |
| 75° | 0   | 0    |
| 85° | 0   | 0    |
| 90° | 0   |      |

TEST NUMBER: P1273148

CATALOG NUMBER: P3AS02R609830DE010 E3CD1MMS

**CANDELA DISTRIBUTION (FULL):**

| 0°    |       |
|-------|-------|
| 0°    | 251.6 |
| 2.5°  | 247.4 |
| 5°    | 240.7 |
| 7.5°  | 240.3 |
| 10°   | 244.9 |
| 12.5° | 248.0 |
| 15°   | 243.3 |
| 17.5° | 229.4 |
| 20°   | 209.0 |
| 22.5° | 187.8 |
| 25°   | 169.9 |
| 27.5° | 152.4 |
| 30°   | 131.7 |
| 32.5° | 107.4 |
| 35°   | 81.1  |
| 37.5° | 55.4  |
| 40°   | 34.8  |
| 42.5° | 20.9  |
| 45°   | 12.3  |
| 47.5° | 7.1   |
| 50°   | 3.8   |
| 52.5° | 1.3   |
| 55°   | 0.9   |
| 57.5° | 0.7   |
| 60°   | 0.7   |
| 62.5° | 0.5   |
| 65°   | 0.5   |
| 67.5° | 0.5   |
| 70°   | 0.4   |
| 72.5° | 0.4   |
| 75°   | 0.4   |
| 77.5° | 0.2   |
| 80°   | 0.2   |
| 82.5° | 0.2   |
| 85°   | 0.2   |
| 87.5° | 0.0   |
| 90°   | 0.0   |

(END OF REPORT)