

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1273213

Luminaire Tested: P3AS02R709830DE010 E3DL1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1273213
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-47)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R709830DE010 E3DL1GPH
Description: 3in Adjustable LED luminaire with, R70 optic, 3000K CCT AND, 98CRI , E3DL1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 88.0 lumens
Efficiency: N/A
Efficacy: 24.4 lumens/watt
Spacing Criteria (0/90/45): 0.97 / 0.97 / 0.98
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1273213

CATALOG NUMBER: P3AS02R709830DE010 E3DL1GPH

Luminous Intensity Polar Plot

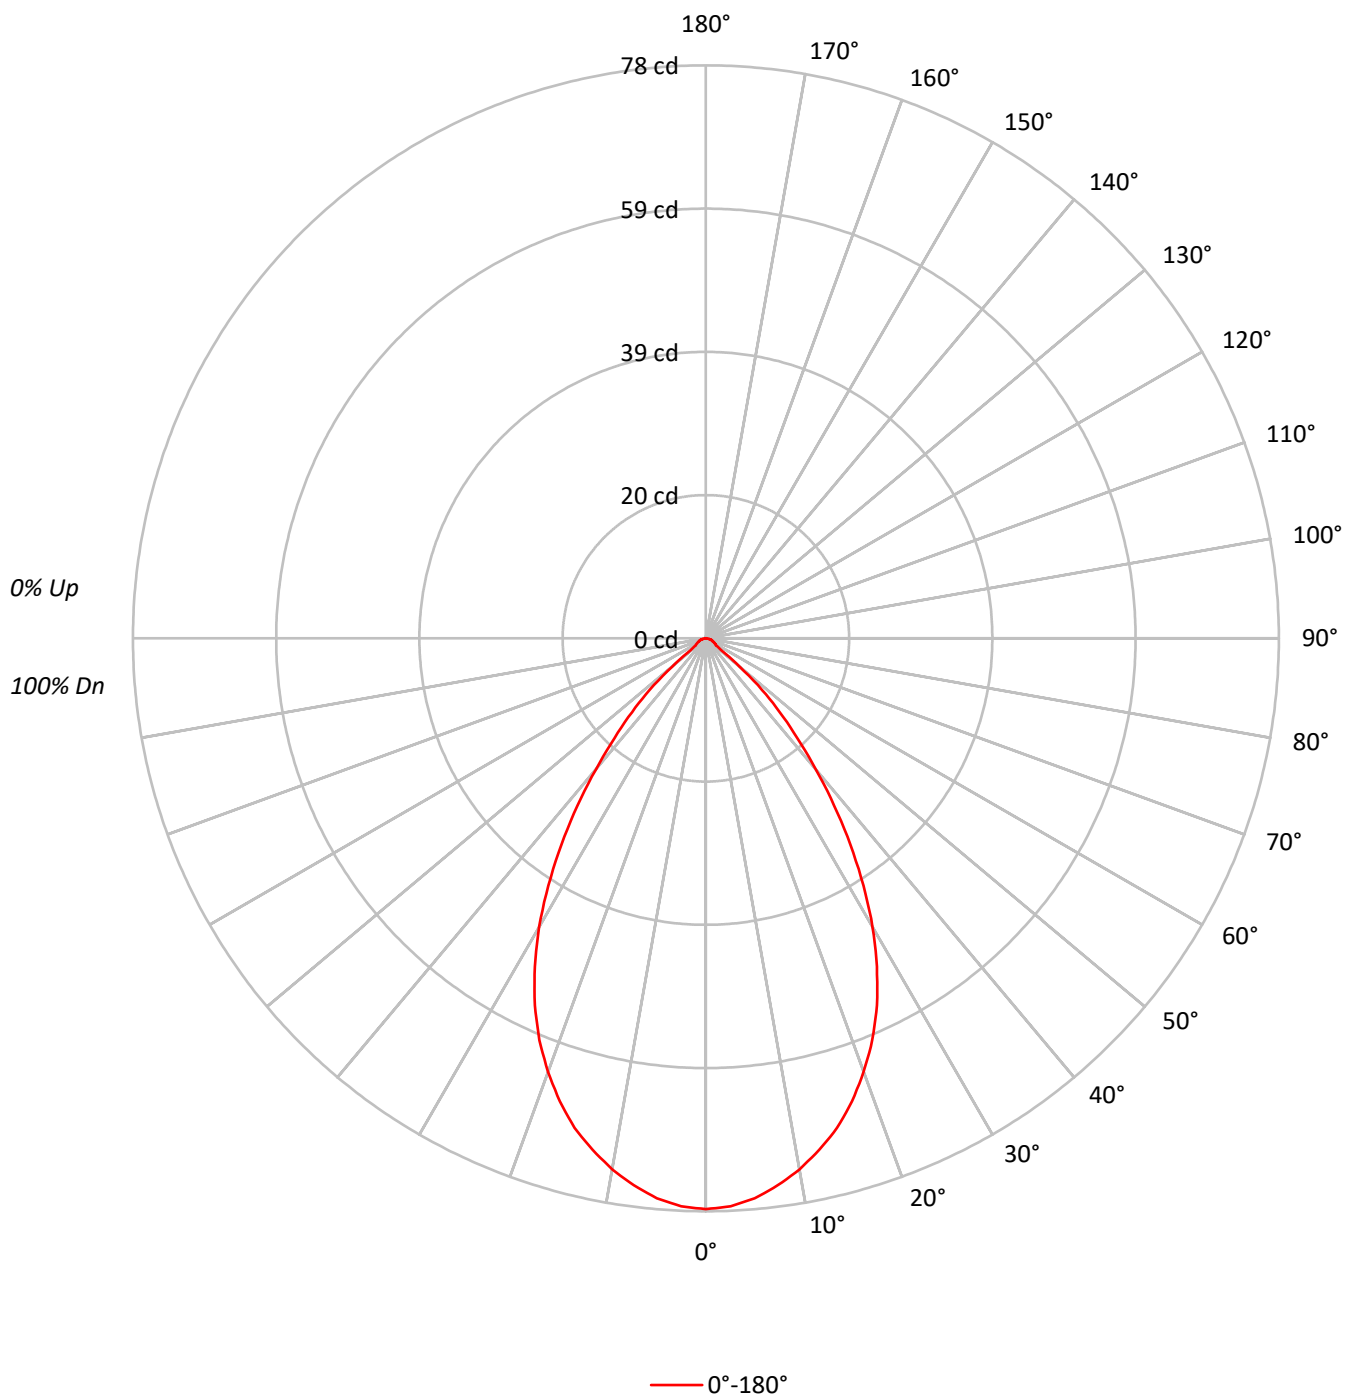

TEST NUMBER: P1273213

CATALOG NUMBER: P3AS02R709830DE010 E3DL1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	113	110	107	104	110	107	105	103	103	101	100	100	98	97	96	95	94	92		
2	106	101	96	93	104	99	95	92	96	92	90	93	90	88	90	88	86	84		
3	100	93	88	83	98	92	87	82	89	85	81	86	83	80	84	81	79	77		
4	94	86	80	75	93	85	79	75	83	78	74	81	76	73	79	75	72	70		
5	89	80	73	69	87	79	73	68	77	72	68	75	71	67	74	70	66	65		
6	84	74	68	63	82	73	67	63	72	66	62	70	65	62	69	65	61	60		
7	79	69	62	58	78	68	62	58	67	61	57	66	61	57	65	60	57	55		
8	75	65	58	53	74	64	58	53	63	57	53	62	57	53	61	56	53	51		
9	71	60	54	50	70	60	54	50	59	53	49	58	53	49	57	52	49	48		
10	67	57	50	46	66	56	50	46	55	50	46	55	49	46	54	49	46	44		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	17038
5°	16839
10°	16343
15°	15664
20°	14655
25°	13331
30°	11495
35°	9182
40°	6670
45°	4404
50°	2047
55°	650
60°	614
65°	571
70°	577
75°	593
80°	505
85°	503

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 4404 cd/sqm

TEST NUMBER: P1273213

CATALOG NUMBER: P3AS02R709830DE010 E3DL1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	7.2	8.2
10°-20°	19.3	21.9
20°-30°	25.1	28.5
30°-40°	21.3	24.2
40°-50°	11.0	12.5
50°-60°	2.1	2.4
60°-70°	1.1	1.3
70°-80°	0.7	0.8
80°-90°	0.2	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	51.6	58.6
0°-40°	72.9	82.8
0°-60°	86.0	97.7
0°-90°	88.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	88.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	78	
5°	76	7
15°	69	19
25°	55	25
35°	34	21
45°	14	11
55°	2	2
65°	1	1
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1273213

CATALOG NUMBER: P3AS02R709830DE010 E3DL1GPH

CANDELA DISTRIBUTION (FULL):

	0°
0°	77.7
2.5°	77.4
5°	76.5
7.5°	75.1
10°	73.4
12.5°	71.3
15°	69.0
17.5°	66.1
20°	62.8
22.5°	59.2
25°	55.1
27.5°	50.4
30°	45.4
32.5°	39.9
35°	34.3
37.5°	28.7
40°	23.3
42.5°	18.4
45°	14.2
47.5°	10.4
50°	6.0
52.5°	2.6
55°	1.7
57.5°	1.6
60°	1.4
62.5°	1.3
65°	1.1
67.5°	1.0
70°	0.9
72.5°	0.8
75°	0.7
77.5°	0.5
80°	0.4
82.5°	0.3
85°	0.2
87.5°	0.1
90°	0.0

(END OF REPORT)