

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1273244

Luminaire Tested: P3AS05R159830DE010 E3DLD1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1273244
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-2)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R159830DE010 E3DLD1GPH
Description: 3in Adjustable LED luminaire with, R15 optic, 3000K CCT AND, 98CRI , E3DLD1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 143.0 lumens
Efficiency: N/A
Efficacy: 19.9 lumens/watt
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.82
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1273244

CATALOG NUMBER: P3AS05R159830DE010 E3DLD1GPH

Luminous Intensity Polar Plot

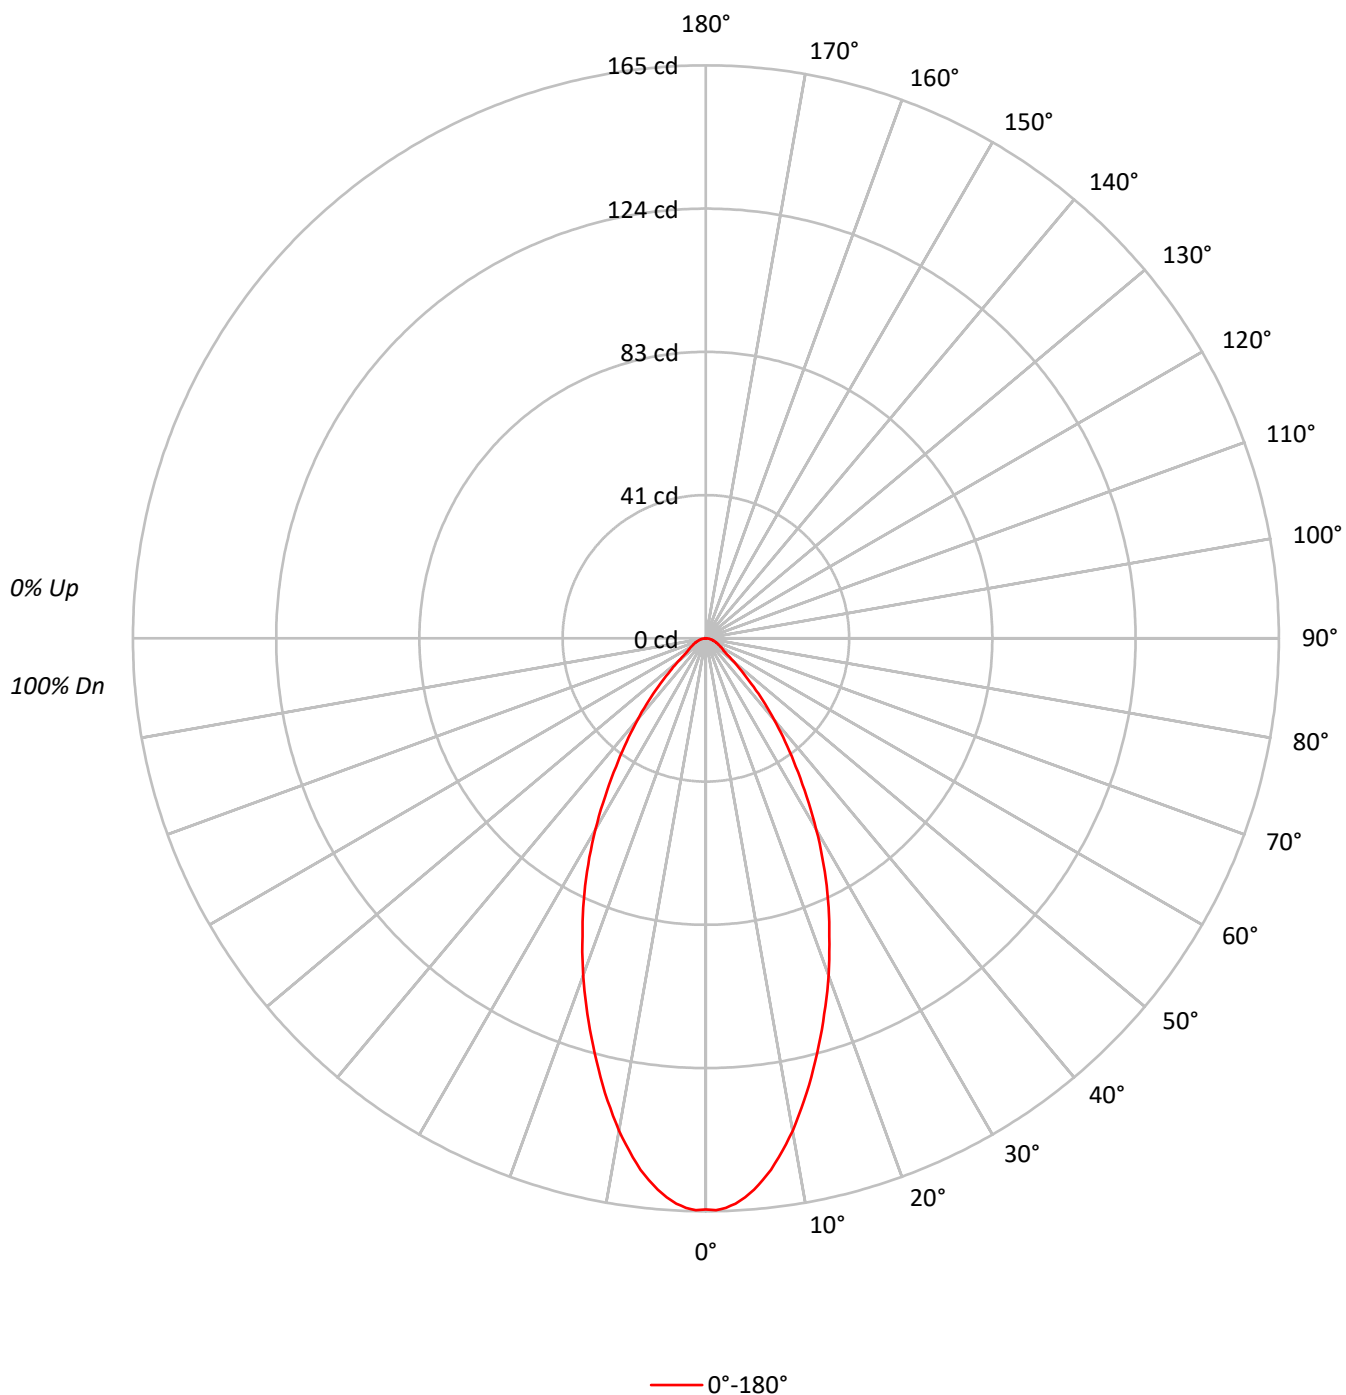

TEST NUMBER: P1273244

CATALOG NUMBER: P3AS05R159830DE010 E3DLD1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	109	106	104	110	107	105	102	103	101	99		99	98	96		96
2	106	100	96	92	104	99	95	91	95	92	89		92	90	87		90
3	100	93	87	83	98	91	86	82	89	84	81		86	82	79		84
4	94	86	80	75	92	85	79	74	82	77	73		80	76	73		78
5	89	80	73	68	87	79	73	68	77	72	67		75	71	67		74
6	84	74	68	63	83	73	67	63	72	66	62		70	66	62		69
7	80	69	63	58	78	69	63	58	67	62	58		66	61	57		65
8	76	65	59	54	74	65	58	54	63	58	54		62	57	54		61
9	72	61	55	51	71	61	55	51	60	54	50		59	54	50		58
10	68	58	52	48	67	57	51	47	57	51	47		56	51	47		55

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	36072
5°	35087
10°	32064
15°	28082
20°	24105
25°	20130
30°	16104
35°	12073
40°	8759
45°	5737
50°	3582
55°	2409
60°	2149
65°	1972
70°	1859
75°	1694
80°	1642
85°	1258

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 5737 cd/sqm

TEST NUMBER: P1273244

CATALOG NUMBER: P3AS05R159830DE010 E3DLD1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	14.7	10.3
10°-20°	34.5	24.1
20°-30°	38.0	26.6
30°-40°	28.4	19.9
40°-50°	14.7	10.3
50°-60°	6.1	4.3
60°-70°	3.8	2.6
70°-80°	2.1	1.5
80°-90°	0.6	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	87.2	61.0
0°-40°	115.6	80.9
0°-60°	136.5	95.4
0°-90°	143.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	143.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	164	
5°	159	15
15°	124	34
25°	83	38
35°	45	28
45°	18	15
55°	6	6
65°	4	4
75°	2	2
85°	0	1
90°	0	

TEST NUMBER: P1273244

CATALOG NUMBER: P3AS05R159830DE010 E3DLD1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	164.5
1°	164.7
2°	164.1
3°	163.0
4°	161.4
5°	159.4
6°	156.9
7°	154.2
8°	150.9
9°	147.5
10°	144.0
12.5°	134.1
15°	123.7
17.5°	113.4
20°	103.3
22.5°	92.9
25°	83.2
27.5°	73.4
30°	63.6
32.5°	54.0
35°	45.1
37.5°	37.5
40°	30.6
42.5°	24.3
45°	18.5
47.5°	13.9
50°	10.5
52.5°	7.8
55°	6.3
57.5°	5.6
60°	4.9
62.5°	4.3
65°	3.8
67.5°	3.3
70°	2.9
72.5°	2.4
75°	2.0
77.5°	1.6
80°	1.3
82.5°	0.9
85°	0.5
87.5°	0.2
90°	0.0

(END OF REPORT)