

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1273280

Luminaire Tested: P3AS05R209830DE010 E3DLD1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1273280
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-6)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R209830DE010 E3DLD1WMH
Description: 3in Adjustable LED luminaire with, R20 optic, 3000K CCT AND, 98CRI , E3DLD1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 292.0 lumens
Efficiency: N/A
Efficacy: 40.6 lumens/watt
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.83
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1273280

CATALOG NUMBER: P3AS05R209830DE010 E3DLD1WMH

Luminous Intensity Polar Plot

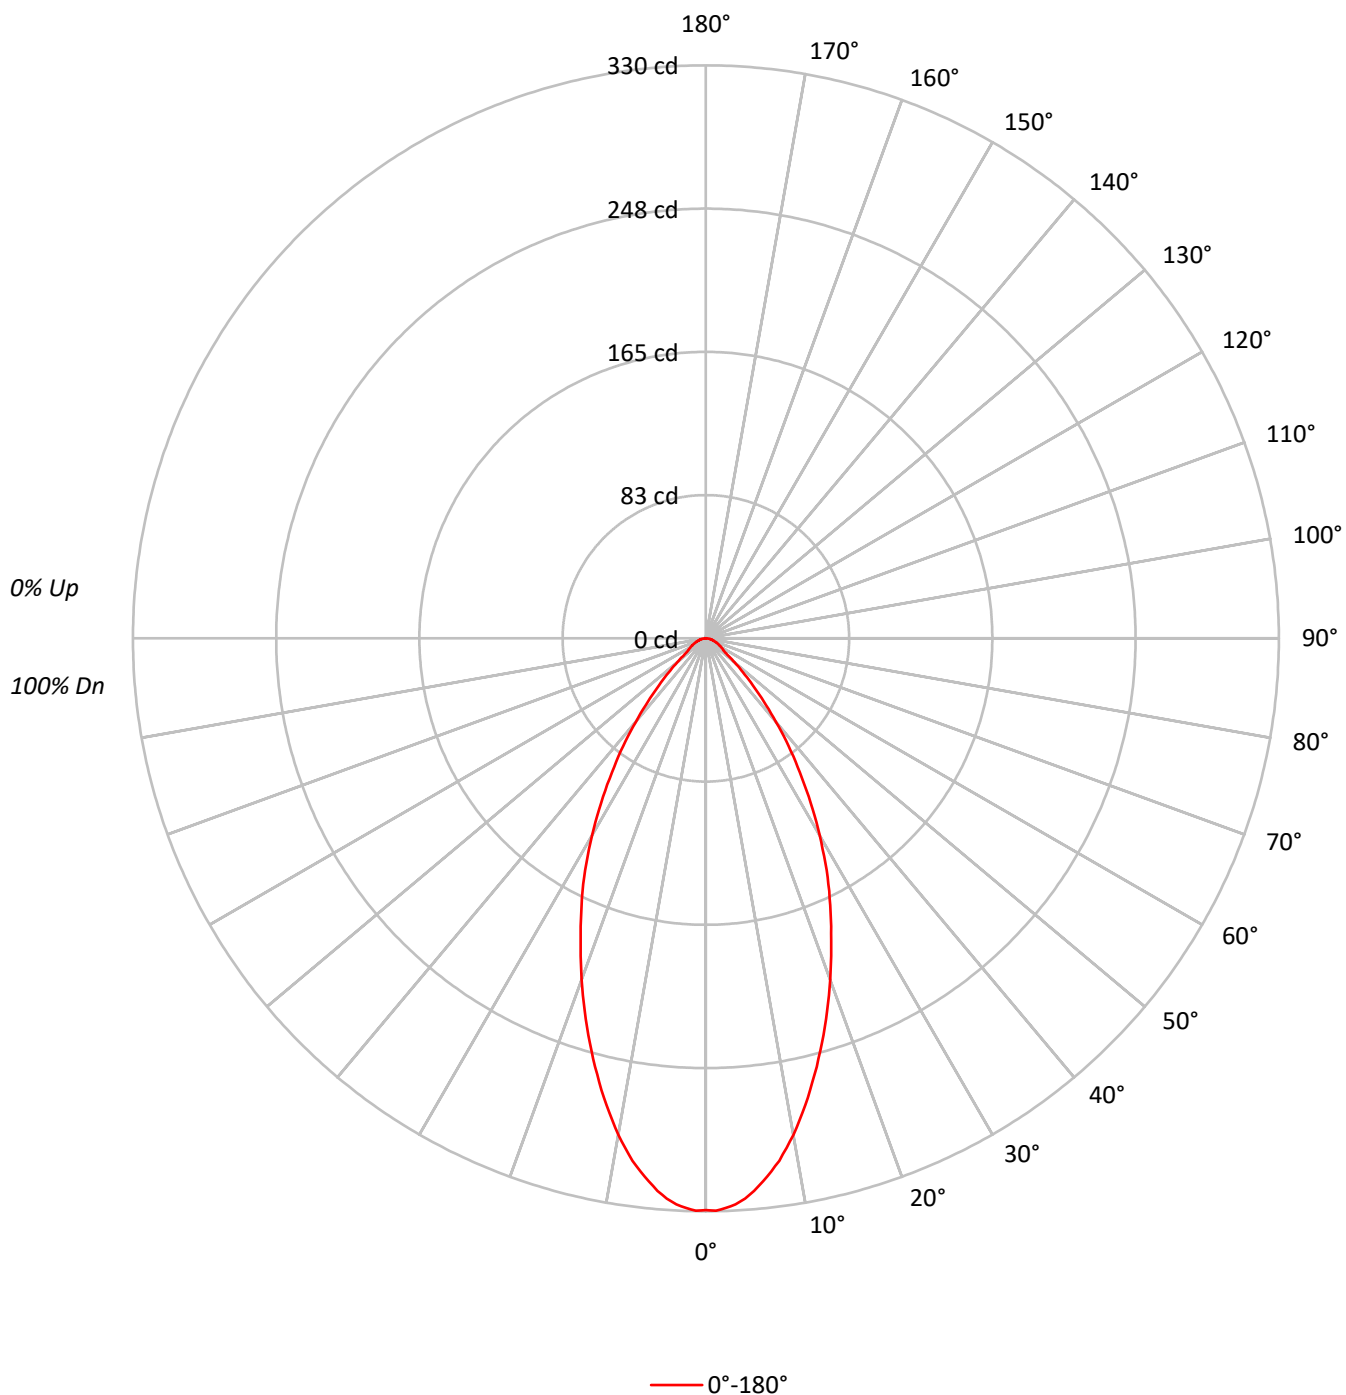

TEST NUMBER: P1273280

CATALOG NUMBER: P3AS05R209830DE010 E3DLD1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	109	106	104	110	107	105	102	103	101	99		99	98	96		96
2	106	100	96	92	104	99	94	91	95	92	89		92	89	87		90
3	100	93	87	82	98	91	86	82	88	84	80		86	82	79		84
4	94	86	79	75	92	85	79	74	82	77	73		80	76	72		78
5	89	80	73	68	87	79	73	68	77	71	67		75	70	67		73
6	84	74	68	63	82	73	67	63	72	66	62		70	65	62		69
7	80	69	63	58	78	69	62	58	67	62	58		66	61	57		65
8	75	65	59	54	74	64	58	54	63	58	54		62	57	53		61
9	72	61	55	50	70	61	55	50	60	54	50		59	54	50		58
10	68	58	51	47	67	57	51	47	56	51	47		56	51	47		55

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	72231
5°	70306
10°	64661
15°	56913
20°	48818
25°	41010
30°	33144
35°	25217
40°	17948
45°	11846
50°	7335
55°	4817
60°	4386
65°	4047
70°	3783
75°	3474
80°	3283
85°	2768

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 11846 cd/sqm

TEST NUMBER: P1273280

CATALOG NUMBER: P3AS05R209830DE010 E3DLD1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	29.5	10.1
10°-20°	69.8	23.9
20°-30°	77.5	26.5
30°-40°	59.1	20.2
40°-50°	30.3	10.4
50°-60°	12.4	4.3
60°-70°	7.8	2.7
70°-80°	4.3	1.5
80°-90°	1.3	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	176.8	60.6
0°-40°	235.9	80.8
0°-60°	278.6	95.4
0°-90°	292.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	292.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	329	
5°	319	30
15°	251	70
25°	170	77
35°	94	59
45°	38	30
55°	13	12
65°	8	8
75°	4	4
85°	1	1
90°	0	

TEST NUMBER: P1273280

CATALOG NUMBER: P3AS05R209830DE010 E3DLD1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	329.4
1°	329.7
2°	328.3
3°	326.4
4°	323.4
5°	319.4
6°	314.5
7°	309.3
8°	303.8
9°	297.1
10°	290.4
12.5°	271.1
15°	250.7
17.5°	230.0
20°	209.2
22.5°	188.4
25°	169.5
27.5°	150.6
30°	130.9
32.5°	112.4
35°	94.2
37.5°	78.3
40°	62.7
42.5°	49.3
45°	38.2
47.5°	28.9
50°	21.5
52.5°	15.9
55°	12.6
57.5°	11.5
60°	10.0
62.5°	8.9
65°	7.8
67.5°	6.7
70°	5.9
72.5°	4.8
75°	4.1
77.5°	3.3
80°	2.6
82.5°	1.9
85°	1.1
87.5°	0.4
90°	0.0

(END OF REPORT)