

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1273291

Luminaire Tested: P3AS05R259830DE010 E3D1H

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1273291
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-9)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R259830DE010 E3D1H
Description: 3in Adjustable LED luminaire with, R25 optic, 3000K CCT AND, 98CRI , E3D1H TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 500.1 lumens
Efficiency: N/A
Efficacy: 69.5 lumens/watt
Spacing Criteria (0/90/45): 0.44 / 0.44 / 0.4
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1273291

CATALOG NUMBER: P3AS05R259830DE010 E3D1H

Luminous Intensity Polar Plot

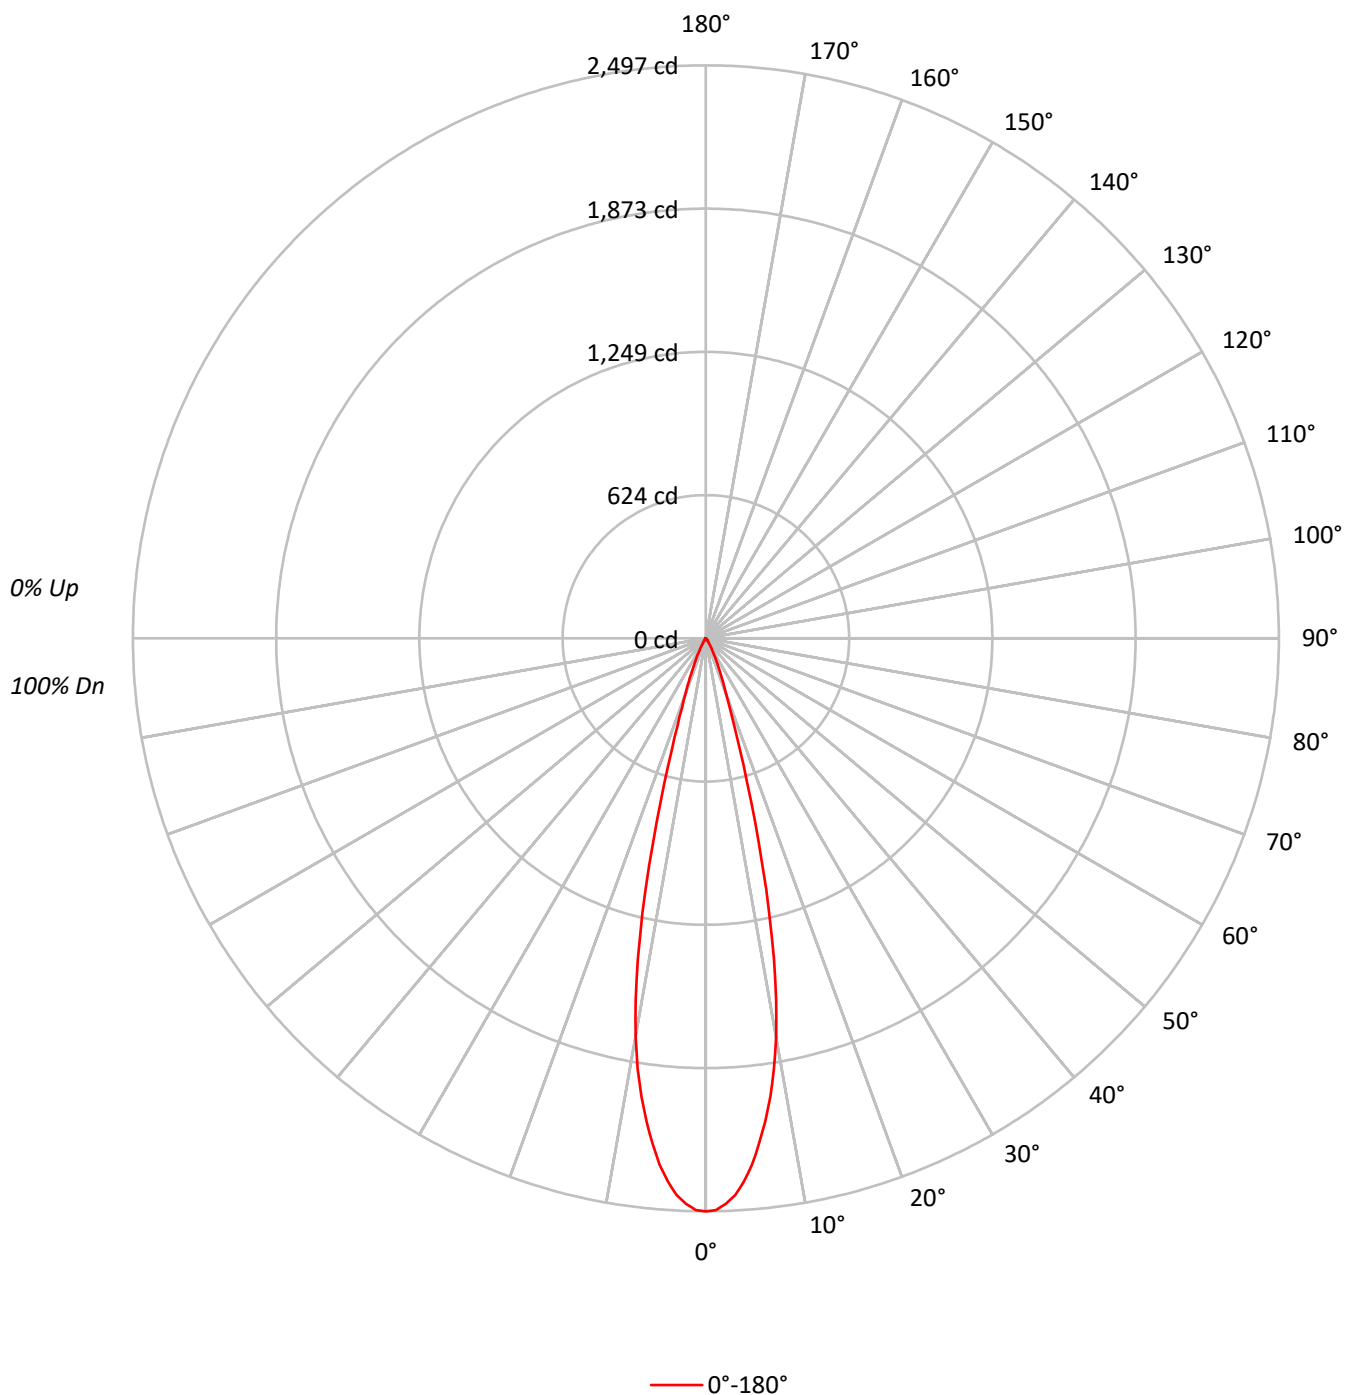

TEST NUMBER: P1273291

CATALOG NUMBER: P3AS05R259830DE010 E3D1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	115	113	111	110		113	111	110	108		107	106	105		104	103	102		100	99	99
2	112	108	106	103		110	107	104	102		104	102	100		101	99	98		98	97	96
3	109	104	101	98		107	103	100	97		100	98	96		98	96	94		96	94	93
4	106	101	97	94		104	100	96	94		98	95	92		96	93	91		94	92	90
5	103	97	93	91		101	96	93	90		95	92	90		93	91	89		92	90	88
6	100	94	90	88		99	94	90	87		92	89	87		91	88	86		90	88	86
7	98	92	88	85		97	91	87	85		90	87	84		89	86	84		88	86	84
8	95	89	85	83		94	89	85	83		88	85	82		87	84	82		86	84	82
9	93	87	83	81		92	86	83	80		86	83	80		85	82	80		84	82	80
10	91	85	81	79		90	84	81	79		84	81	78		83	80	78		83	80	78

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	547588
5°	507263
10°	392489
15°	187470
20°	61815
25°	26058
30°	10103
35°	4363
40°	1460
45°	682
50°	239
55°	153
60°	88
65°	104
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 682 cd/sqm

TEST NUMBER: P1273291

CATALOG NUMBER: P3AS05R259830DE010 E3D1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	202.6	40.5
10°-20°	230.4	46.1
20°-30°	53.5	10.7
30°-40°	11.2	2.2
40°-50°	1.8	0.4
50°-60°	0.3	0.1
60°-70°	0.2	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	486.5	97.3
0°-40°	497.7	99.5
0°-60°	499.9	100.0
0°-90°	500.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	500.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2497	
5°	2304	203
15°	826	230
25°	108	54
35°	16	11
45°	2	2
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1273291

CATALOG NUMBER: P3AS05R259830DE010 E3D1H

CANDELA DISTRIBUTION (FULL):

0°	
0°	2497.2
1°	2492.1
2°	2466.2
3°	2429.8
4°	2374.1
5°	2304.5
6°	2215.1
7°	2121.6
8°	2016.6
9°	1898.3
10°	1762.7
11°	1605.5
12°	1425.1
13°	1227.5
14°	1020.8
15°	825.8
16°	653.2
17°	508.9
18°	400.3
19°	320.2
20°	264.9
21°	221.4
22°	185.8
23°	155.2
24°	129.8
25°	107.7
27.5°	63.8
30°	39.9
32.5°	25.6
35°	16.3
37.5°	9.8
40°	5.1
42.5°	3.3
45°	2.2
47.5°	1.3
50°	0.7
52.5°	0.4
55°	0.4
57.5°	0.2
60°	0.2
62.5°	0.2
65°	0.2
67.5°	0.2
70°	0.0
72.5°	0.0



TEST NUMBER: P1273291

CATALOG NUMBER: P3AS05R259830DE010 E3D1H

CANDELA DISTRIBUTION (continued):

	0°
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)