

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1273316

Luminaire Tested: P3AS05R259830DE010 E3PHLP1MW

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1273316
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2509-551-7)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R259830DE010 E3PHLP1MW
Description: 3in Adjustable LED luminaire with, R25 optic, 3000K CCT AND, 98CRI , E3PHLP1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 214.0 lumens
Efficiency: N/A
Efficacy: 29.7 lumens/watt
Spacing Criteria (0/90/45): 0.59 / 0.59 / 0.65
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1273316

CATALOG NUMBER: P3AS05R259830DE010 E3PHLP1MW

Luminous Intensity Polar Plot

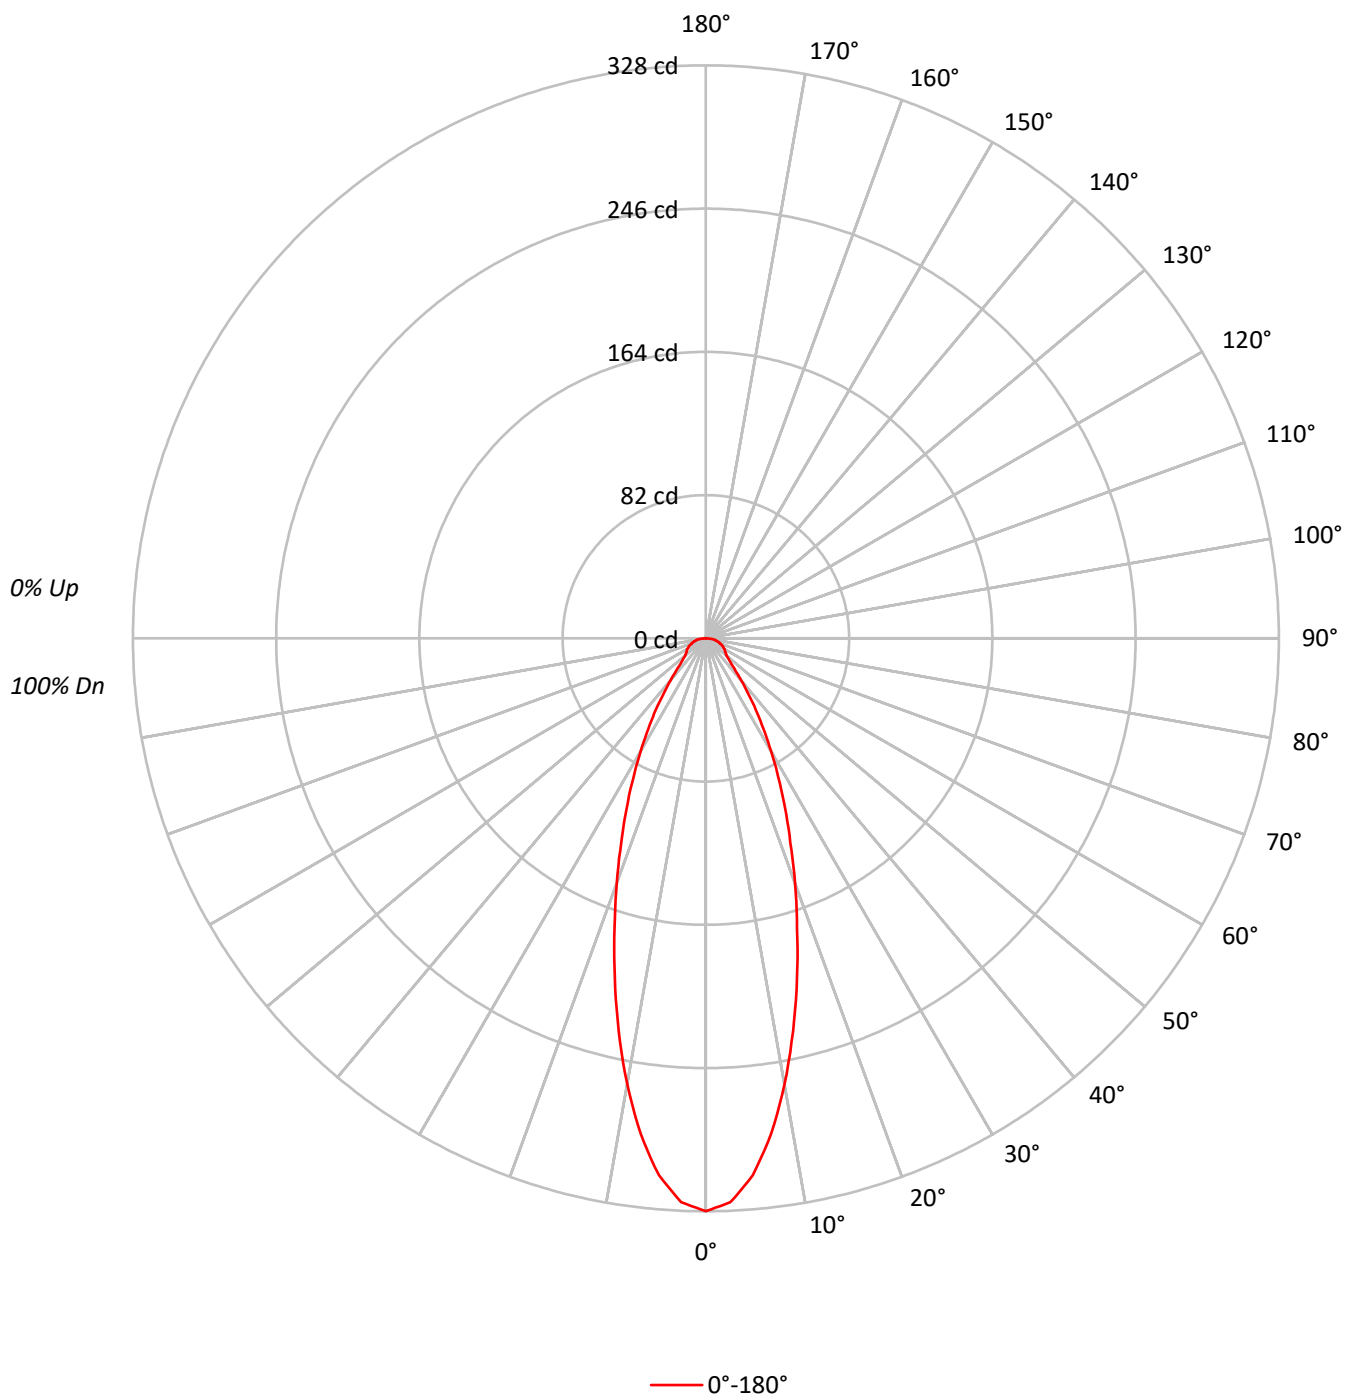

TEST NUMBER: P1273316

CATALOG NUMBER: P3AS05R259830DE010 E3PHLP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	108	105	102	109	106	103	101	102	100	97		98	96	95		95
2	105	99	94	90	103	97	93	89	94	90	87		91	88	85		88
3	99	91	85	80	97	90	84	80	87	82	78		84	80	77		82
4	93	84	78	73	91	83	77	73	81	76	72		79	74	71		77
5	88	79	72	67	86	78	71	67	76	70	66		74	69	66		72
6	84	74	67	62	82	73	66	62	71	66	61		70	65	61		68
7	79	69	63	58	78	68	62	58	67	61	57		66	61	57		65
8	76	65	59	54	74	65	58	54	63	58	54		62	57	54		61
9	72	62	55	51	71	61	55	51	60	55	51		59	54	51		58
10	69	59	52	48	68	58	52	48	57	52	48		56	51	48		56

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	71902
5°	67929
10°	57737
15°	45744
20°	34770
25°	25937
30°	18864
35°	13331
40°	9046
45°	6326
50°	5288
55°	5123
60°	5394
65°	5552
70°	5514
75°	5931
80°	6819
85°	6793

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 82.5°
Luminance: 7224 cd/sqm

TEST NUMBER: P1273316

CATALOG NUMBER: P3AS05R259830DE010 E3PHLP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	27.9	13.0
10°-20°	55.8	26.1
20°-30°	49.4	23.1
30°-40°	31.4	14.7
40°-50°	16.6	7.8
50°-60°	12.2	5.7
60°-70°	10.4	4.9
70°-80°	7.4	3.4
80°-90°	2.9	1.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	133.0	62.1
0°-40°	164.4	76.8
0°-60°	193.3	90.3
0°-90°	214.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	214.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	328	
5°	309	28
15°	202	56
25°	107	49
35°	50	31
45°	20	17
55°	13	12
65°	11	10
75°	7	7
85°	3	3
90°	0	

TEST NUMBER: P1273316

CATALOG NUMBER: P3AS05R259830DE010 E3PHLP1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	327.9
2.5°	323.1
5°	308.6
7.5°	286.1
10°	259.3
12.5°	230.4
15°	201.5
17.5°	173.6
20°	149.0
22.5°	126.4
25°	107.2
27.5°	90.0
30°	74.5
32.5°	61.1
35°	49.8
37.5°	39.6
40°	31.6
42.5°	25.2
45°	20.4
47.5°	17.7
50°	15.5
52.5°	14.5
55°	13.4
57.5°	12.9
60°	12.3
62.5°	11.3
65°	10.7
67.5°	9.6
70°	8.6
72.5°	8.0
75°	7.0
77.5°	5.9
80°	5.4
82.5°	4.3
85°	2.7
87.5°	1.1
90°	0.0

(END OF REPORT)