

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1273375

Luminaire Tested: P3AS05R359830DE010 E3PHLD1MW

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1273375
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-20)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R359830DE010 E3PHLD1MW
Description: 3in Adjustable LED luminaire with, R35 optic, 3000K CCT AND, 98CRI , E3PHLD1MW TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 287.0 lumens
Efficiency: N/A
Efficacy: 39.9 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.92
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1273375
CATALOG NUMBER: P3AS05R359830DE010 E3PHLD1MW

Luminous Intensity Polar Plot

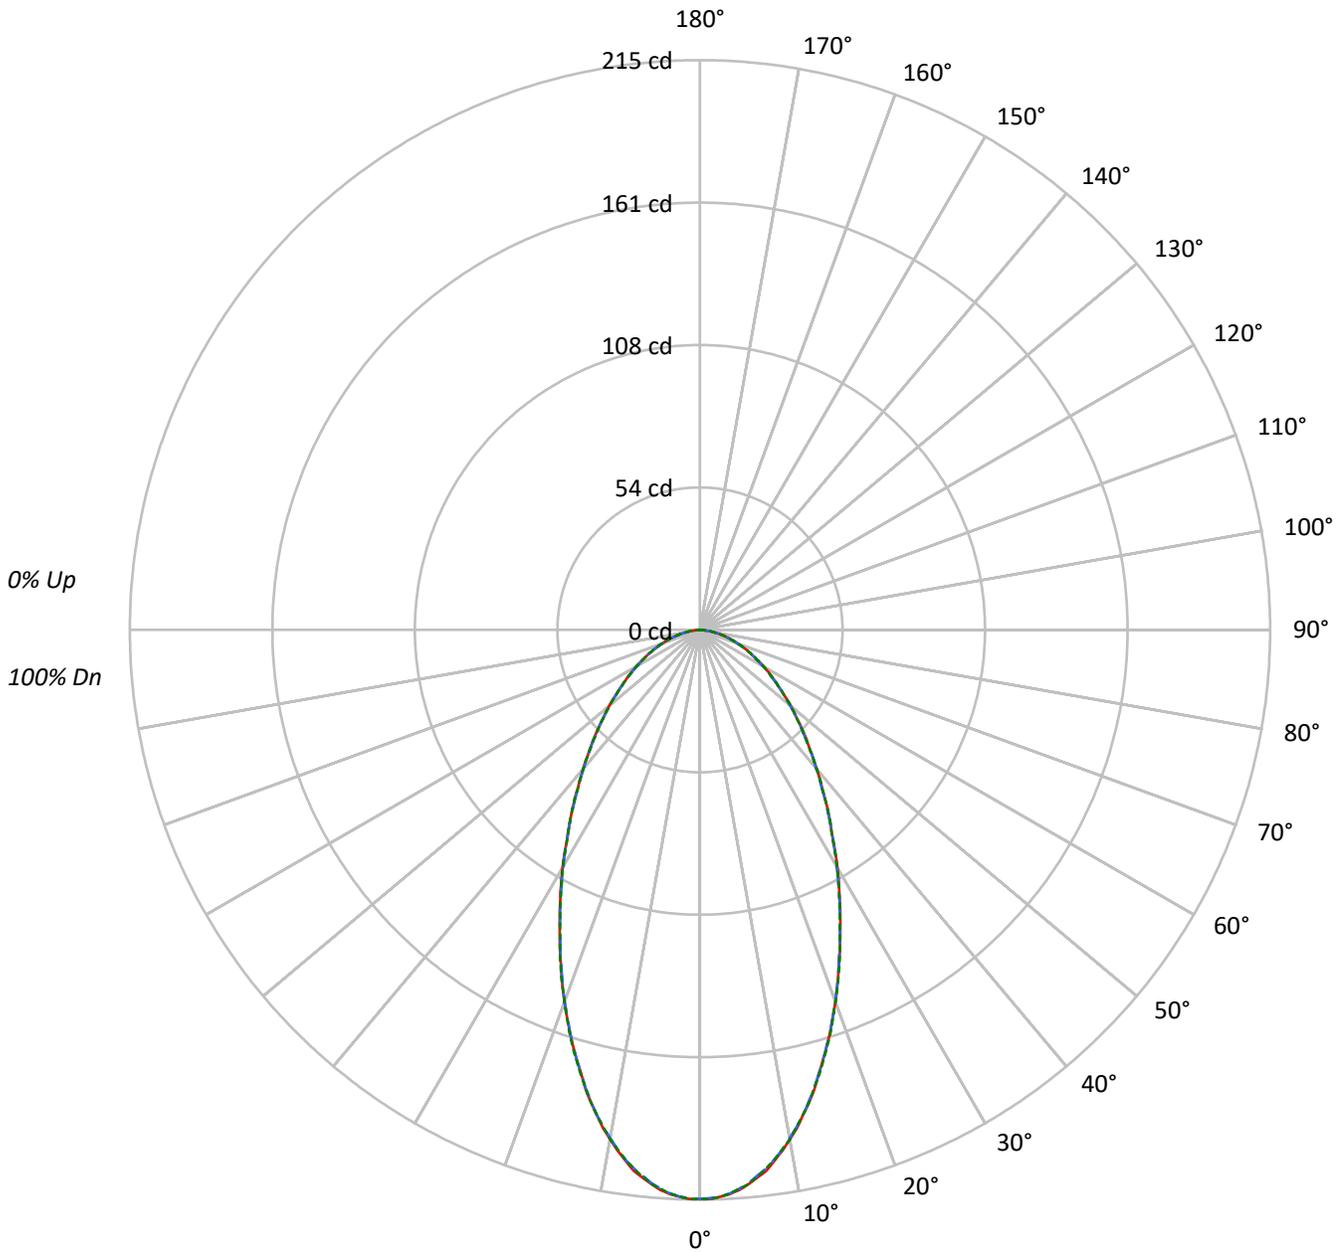

— 0°-180° - - - 45°-225° - · - · 90°-270°



TEST NUMBER: P1273375
 CATALOG NUMBER: P3AS05R359830DE010 E3PHLD1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	102	102	102	100
1	111	107	103	100	108	105	101	99	100	98	95	97	95	93	93	91	90	93	91	90	88
2	103	96	90	85	100	94	89	84	90	86	82	87	84	81	84	81	79	84	81	79	77
3	95	86	79	74	93	85	78	73	82	76	72	79	75	71	77	73	70	77	73	70	68
4	88	78	71	65	86	77	70	64	75	68	64	72	67	63	70	66	62	70	66	62	60
5	82	71	64	58	80	70	63	58	68	62	57	66	61	56	65	60	56	65	60	56	54
6	77	65	58	52	75	65	57	52	63	56	51	61	55	51	60	55	51	60	55	51	49
7	72	60	53	47	71	60	52	47	58	52	47	57	51	46	55	50	46	55	50	46	44
8	68	56	48	43	66	55	48	43	54	47	43	53	47	43	52	46	42	52	46	42	41
9	64	52	45	40	63	51	44	40	50	44	39	49	44	39	48	43	39	48	43	39	38
10	60	49	42	37	59	48	41	37	47	41	37	46	41	36	45	40	36	45	40	36	35

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	47101	47101	47101
5°	46225	46137	46225
10°	43464	43375	43464
15°	39342	39342	39433
20°	34840	34840	34840
25°	30292	30195	30195
30°	26257	26080	26156
35°	22620	22513	22620
40°	19608	19522	19608
45°	17242	17118	17118
50°	15283	15147	15147
55°	13457	13457	13457
60°	12192	12017	12192
65°	10948	10948	10948
70°	9745	9745	9745
75°	8811	8472	8811
80°	7450	7450	7450
85°	4780	4780	4780

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 17242 cd/sqm



TEST NUMBER: P1273375
 CATALOG NUMBER: P3AS05R359830DE010 E3PHLD1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	19.5	6.8
10°-20°	48.4	16.8
20°-30°	57.4	20.0
30°-40°	52.8	18.4
40°-50°	42.9	14.9
50°-60°	31.7	11.0
60°-70°	21.0	7.3
70°-80°	10.9	3.8
80°-90°	2.5	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	125.3	43.7
0°-40°	178.2	62.1
0°-60°	252.7	88.1
0°-90°	287.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	287.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	215	215	215	215	215	
5°	210	210	210	210	210	20
15°	173	173	173	173	174	48
25°	125	125	125	125	125	58
35°	84	84	84	84	84	53
45°	56	55	55	55	55	43
55°	35	35	35	35	35	32
65°	21	21	21	21	21	21
75°	10	10	10	10	10	11
85°	2	2	2	2	2	2
90°	0	0	0	0	0	



TEST NUMBER: P1273375

CATALOG NUMBER: P3AS05R359830DE010 E3PHLD1MW

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	214.8	214.8	214.8	214.8	214.8
1°	214.8	214.5	214.5	214.5	214.8
2°	214.1	214.1	214.1	214.1	214.1
3°	213.3	213.0	213.0	213.0	213.0
4°	211.9	211.5	211.5	211.5	211.5
5°	210.0	209.6	209.6	209.6	210.0
6°	207.8	207.4	207.1	207.1	207.4
7°	205.6	204.8	204.8	204.8	204.8
8°	202.2	201.9	201.9	201.9	201.9
9°	198.9	198.2	198.5	198.5	198.5
10°	195.2	194.8	194.8	194.8	195.2
11°	191.5	191.1	191.1	190.8	191.1
12°	187.1	187.1	187.1	187.1	187.1
13°	183.0	182.6	182.6	182.6	183.0
14°	178.5	178.2	178.2	178.2	178.2
15°	173.3	173.3	173.3	173.3	173.7
17.5°	161.5	161.1	161.5	161.5	161.9
20°	149.3	148.9	149.3	149.3	149.3
22.5°	137.0	137.0	136.7	137.0	137.4
25°	125.2	124.8	124.8	125.2	124.8
27.5°	114.1	113.7	113.7	113.7	113.7
30°	103.7	103.0	103.0	103.3	103.3
32.5°	93.0	93.0	93.3	93.0	93.0
35°	84.5	84.1	84.1	84.5	84.5
37.5°	75.9	75.6	75.6	75.9	75.9
40°	68.5	68.5	68.2	68.5	68.5
42.5°	61.5	61.5	61.5	61.5	61.5
45°	55.6	55.2	55.2	55.2	55.2
47.5°	49.6	49.6	49.6	49.3	49.6
50°	44.8	44.4	44.4	44.4	44.4
52.5°	39.6	39.6	39.6	39.6	39.6
55°	35.2	35.2	35.2	35.2	35.2
57.5°	31.5	31.1	31.1	31.1	31.1
60°	27.8	27.8	27.4	27.8	27.8
62.5°	24.1	24.1	24.1	24.1	24.1
65°	21.1	21.1	21.1	21.1	21.1
67.5°	18.1	18.1	18.1	18.1	18.1
70°	15.2	15.2	15.2	15.2	15.2
72.5°	13.0	12.6	12.6	12.6	12.6
75°	10.4	10.4	10.0	10.4	10.4
77.5°	7.8	7.8	7.8	7.8	7.8
80°	5.9	5.9	5.9	5.6	5.9
82.5°	3.7	3.7	3.7	3.7	3.7
85°	1.9	1.9	1.9	1.9	1.9
87.5°	0.4	0.4	0.4	0.7	0.7



TEST NUMBER: P1273375
CATALOG NUMBER: P3AS05R359830DE010 E3PHLD1MW

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)