

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1273419

Luminaire Tested: P3AS05R459830DE010 E3DLD1GPH

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1273419  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-26)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS05R459830DE010 E3DLD1GPH  
Description: 3in Adjustable LED luminaire with, R45 optic, 3000K CCT AND, 98CRI , E3DLD1GPH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 157.0 lumens  
Efficiency: N/A  
Efficacy: 21.8 lumens/watt  
Spacing Criteria (0/90/45): 0.84 / 0.84 / 0.92  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 7.2  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1273419  
CATALOG NUMBER: P3AS05R459830DE010 E3DLD1GPH

### Luminous Intensity Polar Plot

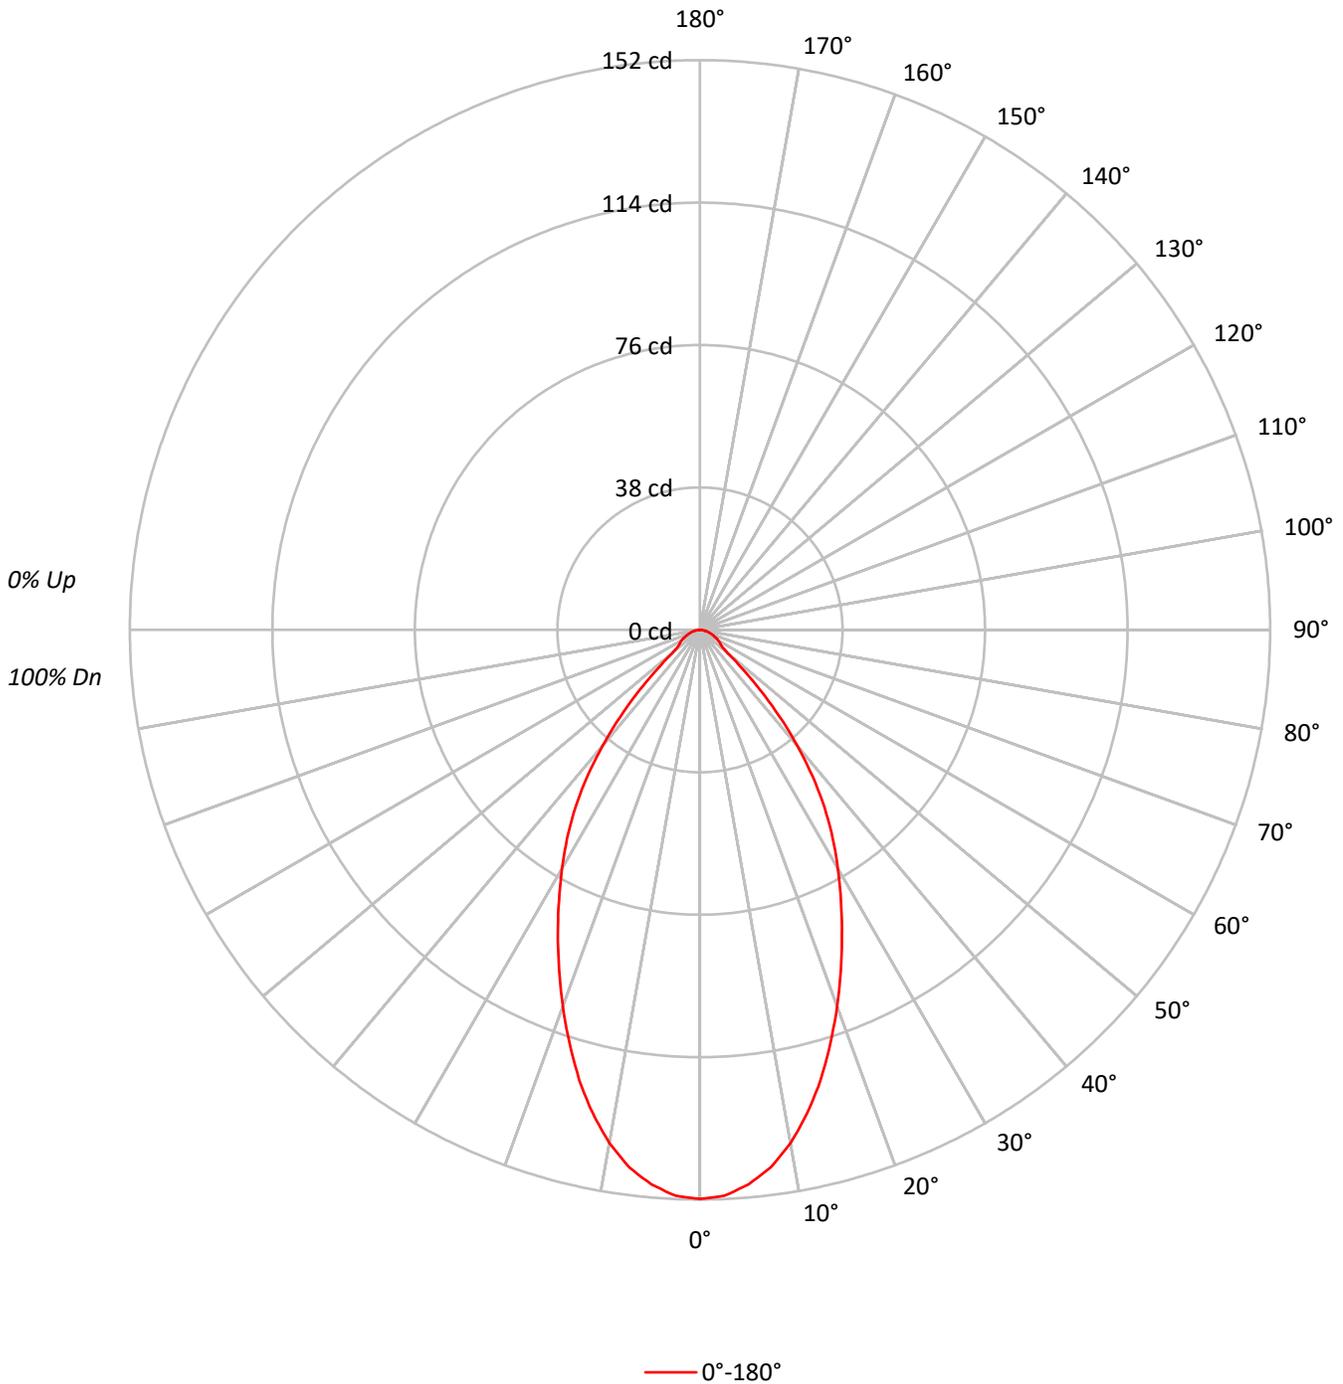



TEST NUMBER: P1273419  
 CATALOG NUMBER: P3AS05R459830DE010 E3DLD1GPH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	112	109	106	104	110	107	104	102	103	101	99	99	97	96	96	94	93	91				91
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83				83
3	99	92	86	82	97	90	85	81	88	83	80	85	81	78	83	80	77	75				75
4	94	85	78	74	92	84	78	73	81	76	72	79	75	71	77	74	71	69				69
5	88	79	72	67	86	78	71	67	76	70	66	74	69	65	72	68	65	63				63
6	83	73	66	61	81	72	66	61	71	65	61	69	64	60	68	63	60	58				58
7	78	68	61	57	77	67	61	56	66	60	56	65	60	56	64	59	55	54				54
8	74	64	57	52	73	63	57	52	62	56	52	61	56	52	60	55	52	50				50
9	70	60	53	49	69	59	53	49	58	52	48	57	52	48	56	52	48	47				47
10	67	56	50	45	66	56	49	45	55	49	45	54	49	45	53	48	45	44				44

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	33287
5°	32688
10°	30950
15°	28218
20°	24946
25°	21679
30°	18610
35°	15499
40°	11536
45°	7071
50°	3275
55°	2561
60°	2456
65°	2231
70°	2116
75°	2033
80°	1768
85°	1258

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 7071 cd/sqm



TEST NUMBER: P1273419  
 CATALOG NUMBER: P3AS05R459830DE010 E3DLD1GPH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	13.9	8.8
10°-20°	34.6	22.0
20°-30°	41.1	26.2
30°-40°	35.7	22.8
40°-50°	17.9	11.4
50°-60°	6.2	4.0
60°-70°	4.4	2.8
70°-80°	2.4	1.6
80°-90°	0.7	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	89.6	57.1
0°-40°	125.3	79.8
0°-60°	149.5	95.2
0°-90°	157.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	157.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	152	
5°	148	14
15°	124	35
25°	90	41
35°	58	36
45°	23	18
55°	7	6
65°	4	4
75°	2	2
85°	0	1
90°	0	



TEST NUMBER: P1273419  
CATALOG NUMBER: P3AS05R459830DE010 E3DLD1GPH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	151.8
2.5°	151.1
5°	148.5
7.5°	144.6
10°	139.0
12.5°	132.1
15°	124.3
17.5°	115.6
20°	106.9
22.5°	98.1
25°	89.6
27.5°	81.4
30°	73.5
32.5°	65.9
35°	57.9
37.5°	49.4
40°	40.3
42.5°	31.5
45°	22.8
47.5°	15.0
50°	9.6
52.5°	7.4
55°	6.7
57.5°	6.2
60°	5.6
62.5°	5.1
65°	4.3
67.5°	3.8
70°	3.3
72.5°	2.7
75°	2.4
77.5°	1.8
80°	1.4
82.5°	1.1
85°	0.5
87.5°	0.4
90°	0.0

(END OF REPORT)