

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1273599

Luminaire Tested: P3AS09R159830DE010 E3DLP1WH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1273599
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-3)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R159830DE010 E3DLP1WH
Description: 3in Adjustable LED luminaire with, R15 optic, 3000K CCT AND, 98CRI , E3DLP1WH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 568.0 lumens
Efficiency: N/A
Efficacy: 51.6 lumens/watt
Spacing Criteria (0/90/45): 0.4 / 0.4 / 0.43
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1273599

CATALOG NUMBER: P3AS09R159830DE010 E3DLP1WH

Luminous Intensity Polar Plot

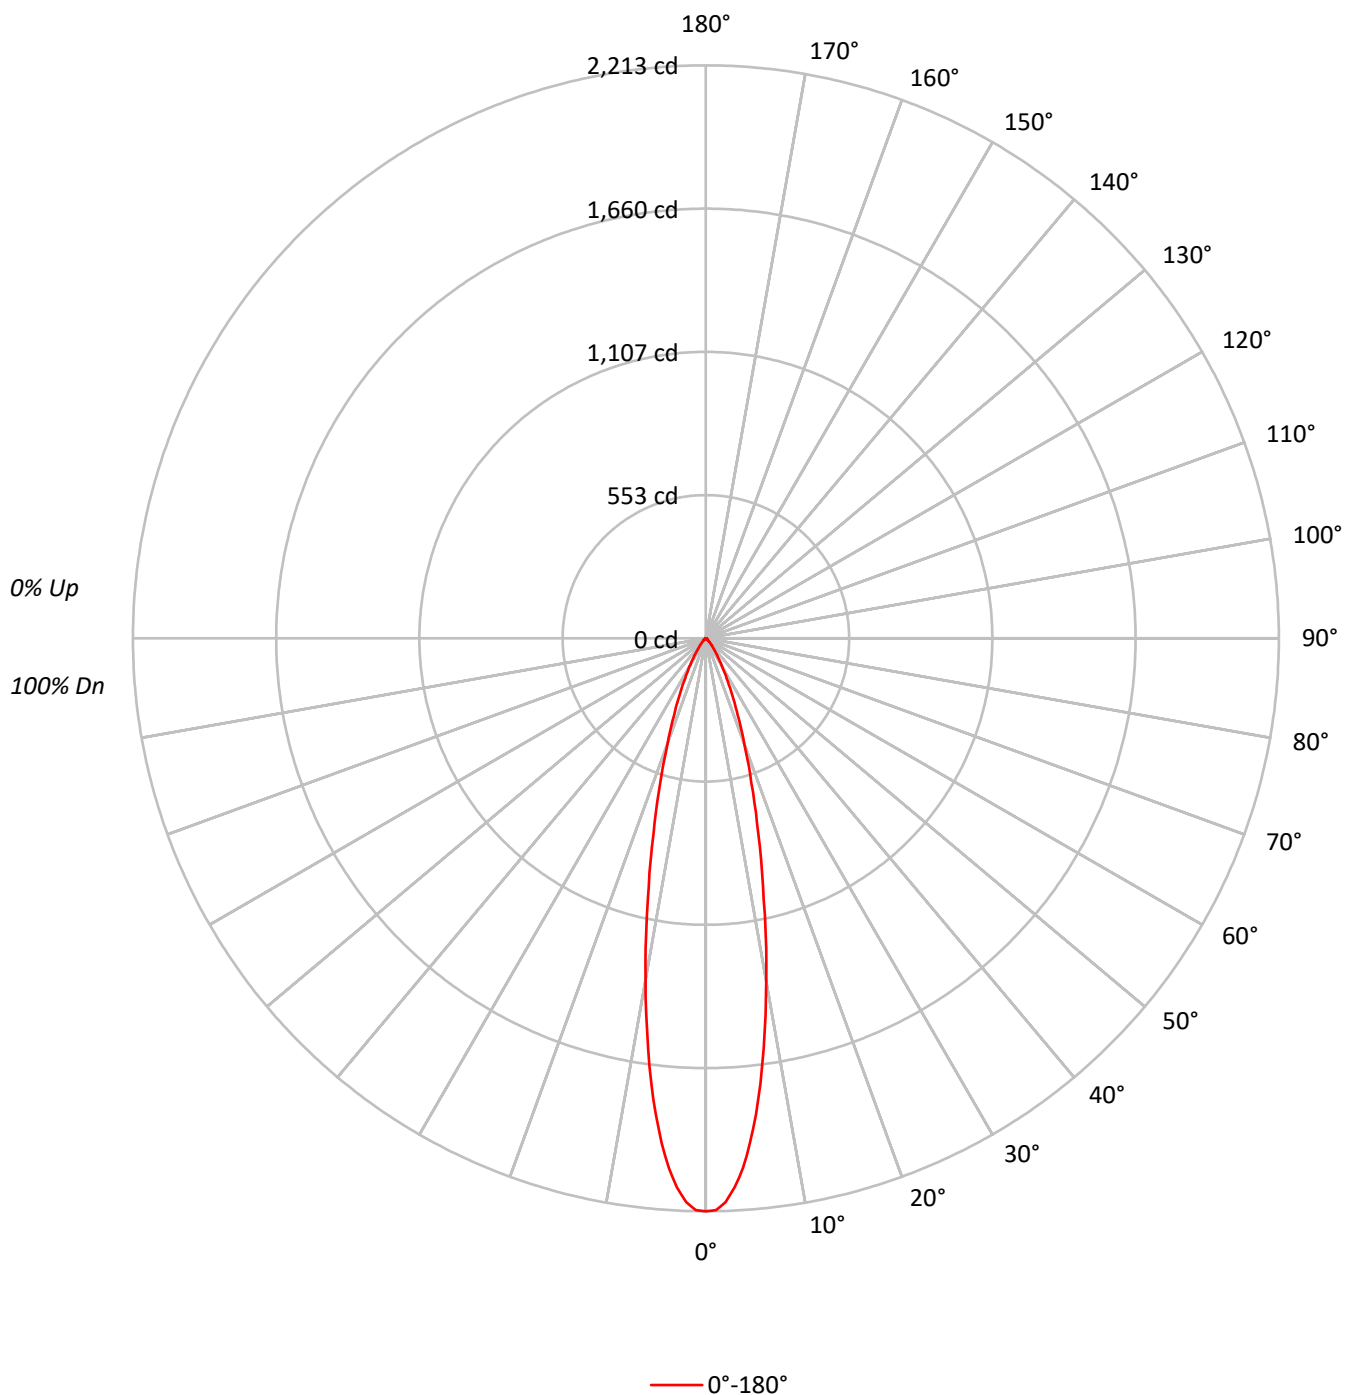



TEST NUMBER: P1273599

CATALOG NUMBER: P3AS09R159830DE010 E3DLP1WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	112	110	108	112	110	108	106	106	104	103		102	101	100		99	98	97	95
2	110	106	103	100	108	104	101	99	101	99	97		98	96	95		96	94	93	91
3	106	101	97	93	104	99	96	93	97	94	91		94	92	90		92	90	88	87
4	102	96	92	88	100	95	91	88	93	89	87		91	88	86		89	87	85	83
5	98	92	87	84	97	91	87	83	89	86	83		88	84	82		86	83	81	80
6	95	88	83	80	94	87	83	80	86	82	79		85	81	79		83	80	78	77
7	92	85	80	77	91	84	80	76	83	79	76		82	78	76		81	78	75	74
8	89	81	77	74	88	81	77	73	80	76	73		79	75	73		78	75	73	72
9	86	79	74	71	85	78	74	71	77	73	71		77	73	70		76	73	70	69
10	84	76	71	68	83	76	71	68	75	71	68		74	71	68		74	70	68	67

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	485224
5°	430705
10°	299104
15°	176891
20°	100739
25°	57584
30°	31878
35°	16998
40°	9389
45°	5086
50°	3173
55°	2523
60°	2149
65°	1972
70°	1731
75°	1864
80°	1389
85°	1258

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 5086 cd/sqm

TEST NUMBER: P1273599

CATALOG NUMBER: P3AS09R159830DE010 E3DLP1WH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	166.4	29.3
10°-20°	219.6	38.7
20°-30°	113.1	19.9
30°-40°	42.5	7.5
40°-50°	13.9	2.4
50°-60°	6.0	1.1
60°-70°	3.8	0.7
70°-80°	2.2	0.4
80°-90°	0.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	499.1	87.9
0°-40°	541.5	95.3
0°-60°	561.4	98.8
0°-90°	568.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	568.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2213	
5°	1957	166
15°	779	220
25°	238	113
35°	64	42
45°	16	14
55°	7	6
65°	4	4
75°	2	2
85°	0	1
90°	0	

TEST NUMBER: P1273599

CATALOG NUMBER: P3AS09R159830DE010 E3DLP1WH

CANDELA DISTRIBUTION (FULL):

0°	
0°	2212.8
1°	2208.4
2°	2179.4
3°	2124.1
4°	2051.4
5°	1956.7
6°	1849.5
7°	1731.8
8°	1601.0
9°	1471.9
10°	1343.3
12.5°	1033.6
15°	779.2
17.5°	583.3
20°	431.7
22.5°	322.3
25°	238.0
27.5°	173.5
30°	125.9
32.5°	89.2
35°	63.5
37.5°	45.4
40°	32.8
42.5°	23.5
45°	16.4
47.5°	12.0
50°	9.3
52.5°	7.7
55°	6.6
57.5°	5.5
60°	4.9
62.5°	4.4
65°	3.8
67.5°	3.3
70°	2.7
72.5°	2.7
75°	2.2
77.5°	1.6
80°	1.1
82.5°	1.1
85°	0.5
87.5°	0.0
90°	0.0

(END OF REPORT)