

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1273701

Luminaire Tested: P3AS09R359830DE010 E3DL1GPH

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1273701  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-19)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS09R359830DE010 E3DL1GPH  
Description: 3in Adjustable LED luminaire with, R35 optic, 3000K CCT AND, 98CRI , E3DL1GPH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 282.0 lumens  
Efficiency: N/A  
Efficacy: 25.6 lumens/watt  
Spacing Criteria (0/90/45): 0.58 / 0.58 / 0.58  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 11  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1273701  
CATALOG NUMBER: P3AS09R359830DE010 E3DL1GPH

### Luminous Intensity Polar Plot

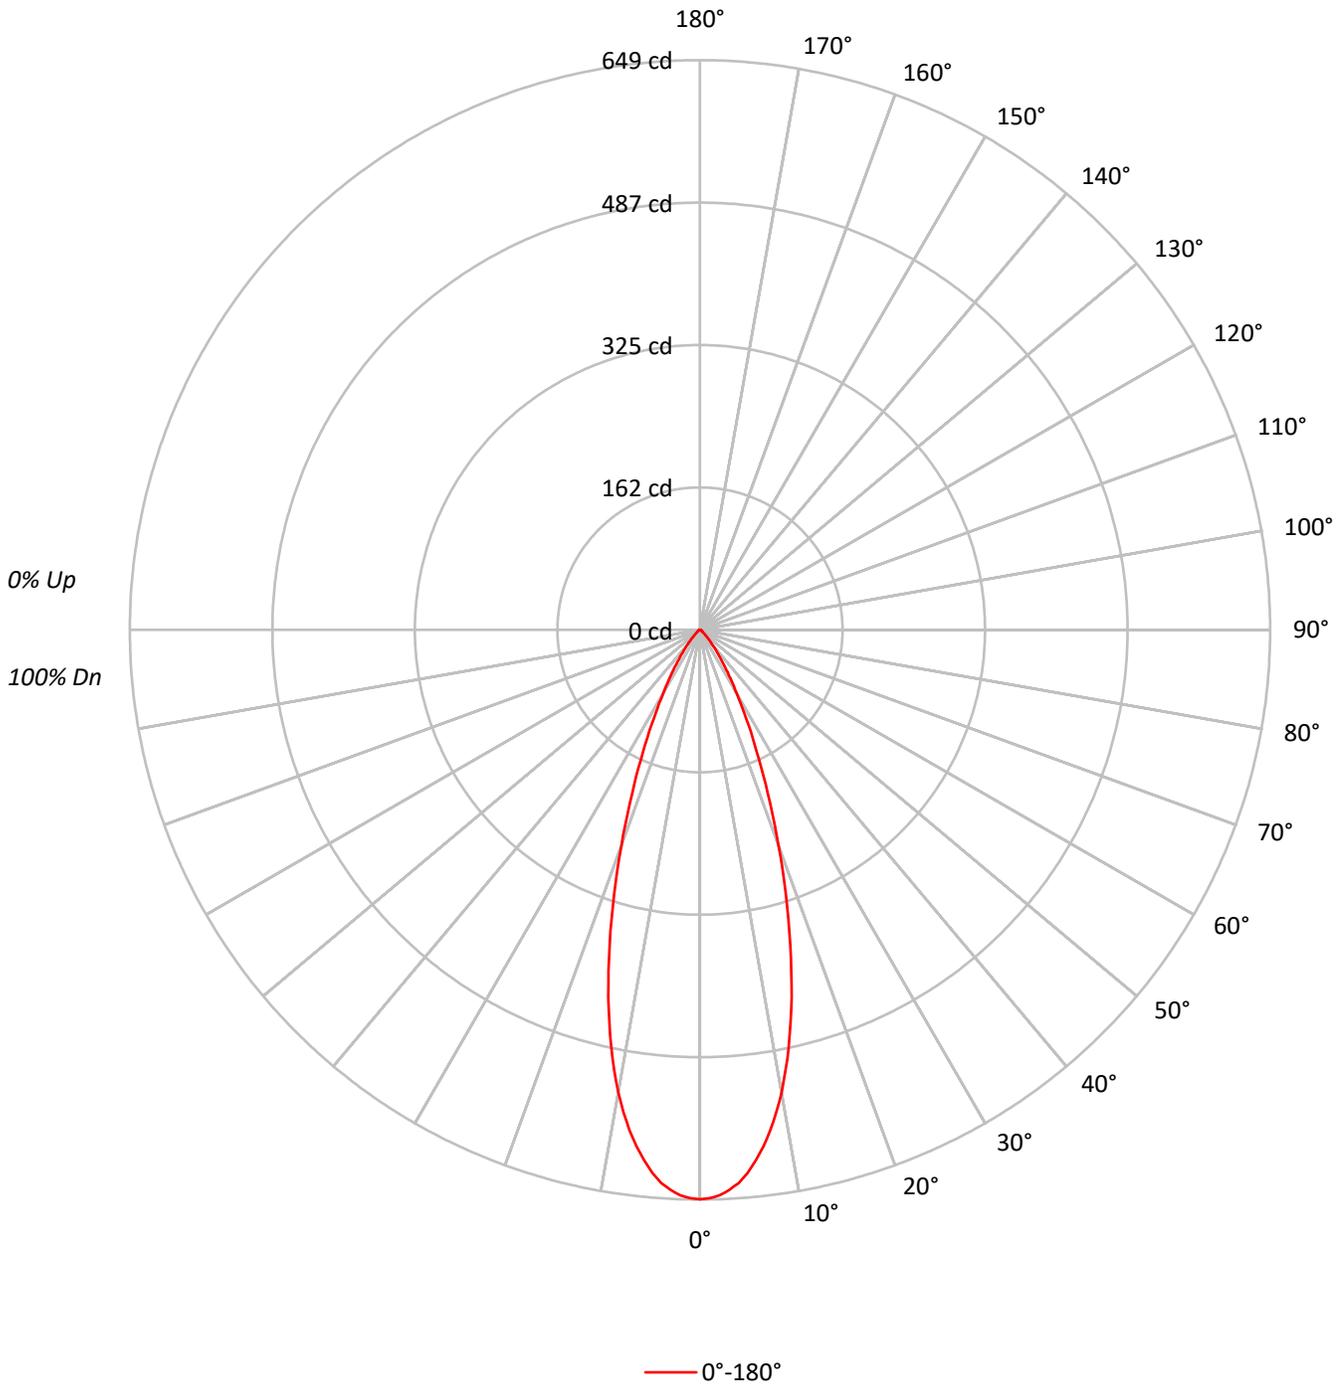



TEST NUMBER: P1273701

CATALOG NUMBER: P3AS09R359830DE010 E3DL1GPH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	109	107	112	109	107	106	105	104	102	102	100	99	98	97	96	95	95	95	95
2	109	105	101	98	107	103	100	97	100	97	95	97	95	93	94	93	91	90	90	90	90
3	105	99	95	91	103	98	94	90	95	92	89	93	90	88	91	88	86	85	85	85	85
4	100	94	89	85	99	93	88	85	91	87	84	89	85	83	87	84	82	80	80	80	80
5	96	89	84	80	95	88	83	80	86	82	79	85	81	78	83	80	78	76	76	76	76
6	92	85	80	76	91	84	79	76	83	78	75	81	77	75	80	77	74	73	73	73	73
7	89	81	76	72	88	80	75	72	79	75	71	78	74	71	77	73	71	70	70	70	70
8	85	77	72	69	84	77	72	68	76	71	68	75	71	68	74	70	68	66	66	66	66
9	82	74	69	66	81	74	69	65	73	68	65	72	68	65	71	67	65	64	64	64	64
10	79	71	66	63	78	71	66	63	70	66	63	69	65	62	69	65	62	61	61	61	61

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	142225
5°	136693
10°	119103
15°	91215
20°	61022
25°	36921
30°	21193
35°	11859
40°	6298
45°	3256
50°	1569
55°	1223
60°	1184
65°	986
70°	1026
75°	932
80°	1010
85°	755

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 3256 cd/sqm



TEST NUMBER: P1273701  
 CATALOG NUMBER: P3AS09R359830DE010 E3DL1GPH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	56.5	20.0
10°-20°	109.5	38.8
20°-30°	71.7	25.4
30°-40°	29.1	10.3
40°-50°	8.7	3.1
50°-60°	3.0	1.1
60°-70°	2.0	0.7
70°-80°	1.2	0.4
80°-90°	0.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	237.7	84.3
0°-40°	266.8	94.6
0°-60°	278.5	98.7
0°-90°	282.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	282.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	649	
5°	621	57
15°	402	109
25°	153	72
35°	44	29
45°	10	9
55°	3	3
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P1273701  
CATALOG NUMBER: P3AS09R359830DE010 E3DL1GPH

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	648.6
1°	647.5
2°	644.6
3°	638.7
4°	631.7
5°	621.0
6°	607.6
7°	592.6
8°	575.7
9°	556.3
10°	534.9
11°	511.0
12°	486.1
13°	458.2
14°	431.6
15°	401.8
17.5°	329.7
20°	261.5
22.5°	201.2
25°	152.6
27.5°	113.7
30°	83.7
32.5°	61.4
35°	44.3
37.5°	31.4
40°	22.0
42.5°	15.3
45°	10.5
47.5°	7.0
50°	4.6
52.5°	3.5
55°	3.2
57.5°	3.0
60°	2.7
62.5°	2.4
65°	1.9
67.5°	1.6
70°	1.6
72.5°	1.3
75°	1.1
77.5°	0.8
80°	0.8
82.5°	0.5
85°	0.3
87.5°	0.3



TEST NUMBER: P1273701  
CATALOG NUMBER: P3AS09R359830DE010 E3DL1GPH

CANDELA DISTRIBUTION (continued):

0°  
90° | 0.0

(END OF REPORT)