

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1273739

Luminaire Tested: P3AS09R409830DE010 E3DLD1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1273739
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-22)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R409830DE010 E3DLD1GPH
Description: 3in Adjustable LED luminaire with, R40 optic, 3000K CCT AND, 98CRI , E3DLD1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 239.0 lumens
Efficiency: N/A
Efficacy: 21.7 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.88
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1273739

CATALOG NUMBER: P3AS09R409830DE010 E3DLD1GPH

Luminous Intensity Polar Plot

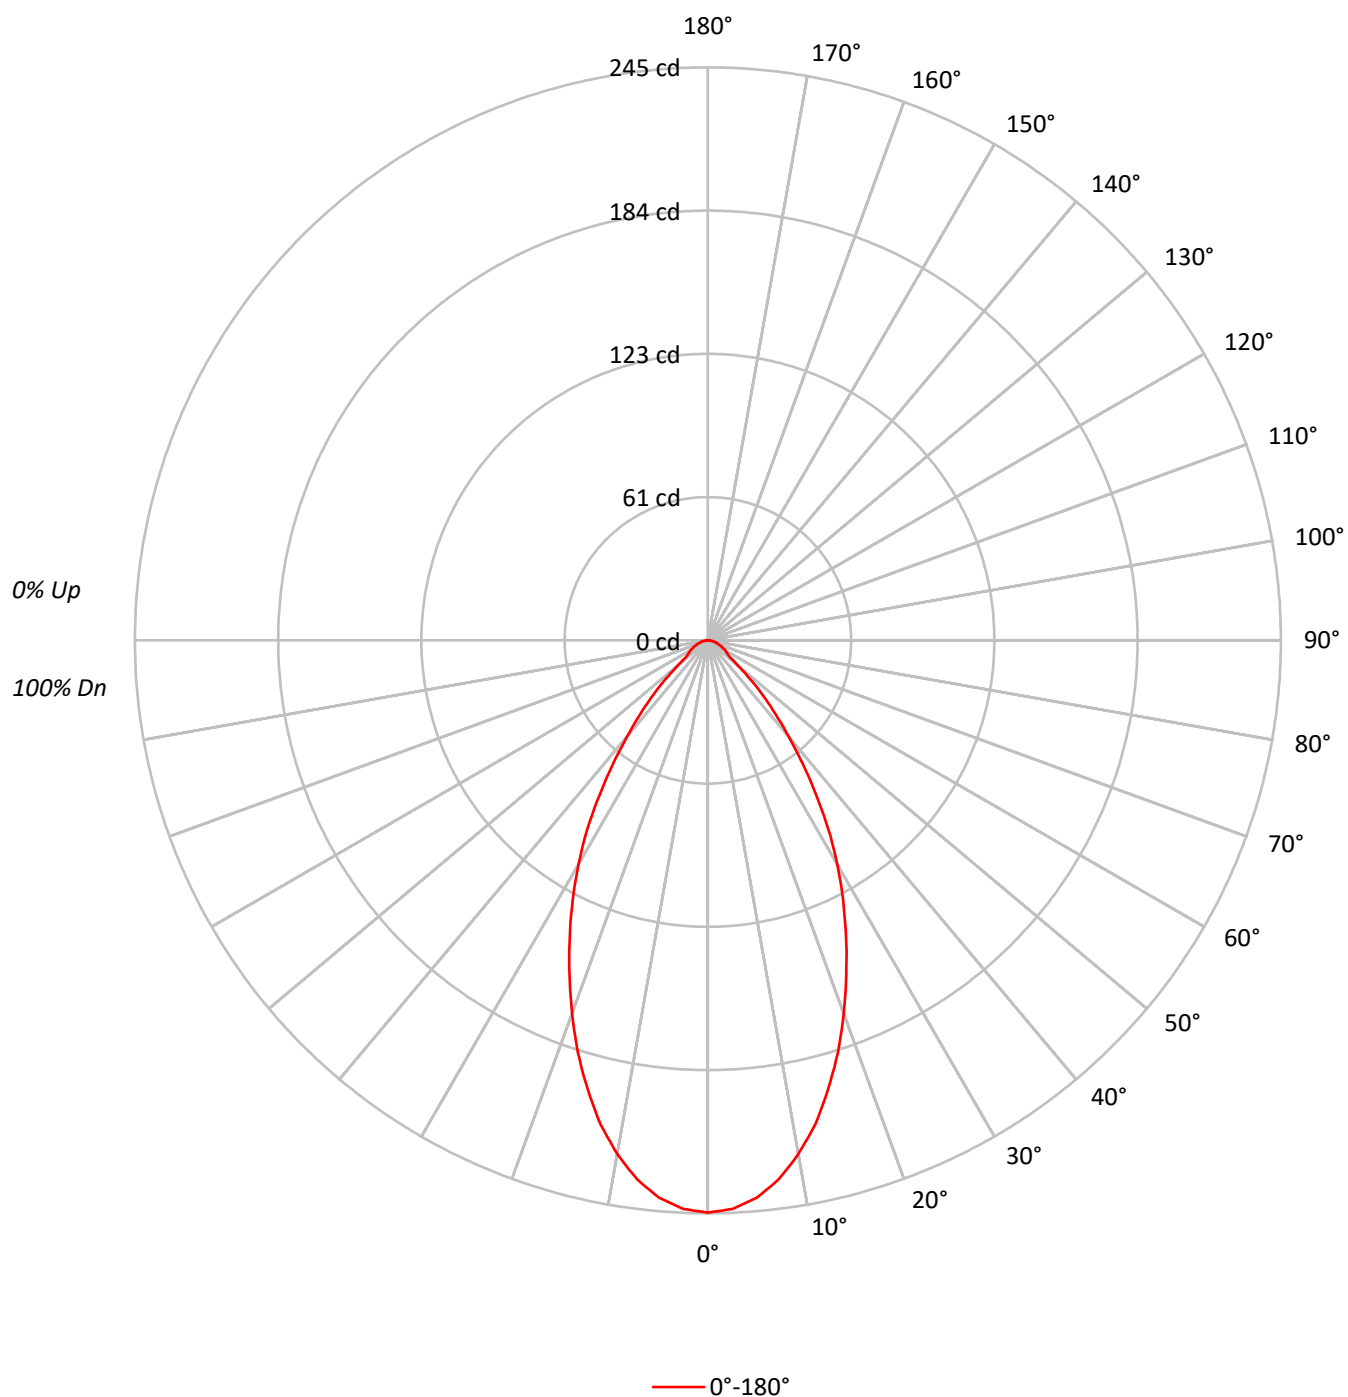

TEST NUMBER: P1273739

CATALOG NUMBER: P3AS09R409830DE010 E3DLD1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	104	110	107	104	102	103	101	99		99	98	96		96
2	106	100	96	92	104	98	94	91	95	92	89		92	89	87		89
3	100	92	87	82	98	91	86	81	88	84	80		86	82	79		83
4	94	85	79	74	92	84	78	74	82	77	73		80	75	72		78
5	89	79	73	68	87	78	72	67	76	71	67		75	70	66		73
6	84	74	67	62	82	73	67	62	71	66	61		70	65	61		68
7	79	69	62	57	78	68	62	57	67	61	57		65	60	57		64
8	75	64	58	53	74	64	57	53	63	57	53		62	56	53		61
9	71	60	54	50	70	60	54	50	59	53	49		58	53	49		57
10	67	57	51	46	66	56	50	46	56	50	46		55	50	46		54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	53658
5°	52674
10°	49654
15°	45108
20°	39623
25°	33825
30°	28030
35°	21630
40°	15372
45°	10358
50°	5663
55°	3976
60°	3772
65°	3476
70°	3077
75°	2965
80°	2399
85°	2013

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 10358 cd/sqm

TEST NUMBER: P1273739

CATALOG NUMBER: P3AS09R409830DE010 E3DLD1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	22.3	9.3
10°-20°	55.3	23.2
20°-30°	64.0	26.8
30°-40°	50.4	21.1
40°-50°	25.9	10.8
50°-60°	9.9	4.1
60°-70°	6.6	2.7
70°-80°	3.6	1.5
80°-90°	1.0	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	141.6	59.3
0°-40°	192.1	80.4
0°-60°	227.8	95.3
0°-90°	239.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	239.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	245	
5°	239	22
15°	199	55
25°	140	64
35°	81	50
45°	33	26
55°	10	10
65°	7	7
75°	4	4
85°	1	1
90°	0	

TEST NUMBER: P1273739

CATALOG NUMBER: P3AS09R409830DE010 E3DLD1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	244.7
2.5°	243.3
5°	239.3
7.5°	232.4
10°	223.0
12.5°	212.0
15°	198.7
17.5°	184.8
20°	169.8
22.5°	154.6
25°	139.8
27.5°	125.1
30°	110.7
32.5°	96.0
35°	80.8
37.5°	66.6
40°	53.7
42.5°	42.8
45°	33.4
47.5°	24.3
50°	16.6
52.5°	12.0
55°	10.4
57.5°	9.4
60°	8.6
62.5°	7.5
65°	6.7
67.5°	5.6
70°	4.8
72.5°	4.0
75°	3.5
77.5°	2.7
80°	1.9
82.5°	1.6
85°	0.8
87.5°	0.5
90°	0.0

(END OF REPORT)