

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1274034

Luminaire Tested: P3AS13R309830DE010 E3DLP1WH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1274034
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-15)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R309830DE010 E3DLP1WH
Description: 3in Adjustable LED luminaire with, R30 optic, 3000K CCT AND, 98CRI , E3DLP1WH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 768.0 lumens
Efficiency: N/A
Efficacy: 53.0 lumens/watt
Spacing Criteria (0/90/45): 0.54 / 0.54 / 0.54
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1274034

CATALOG NUMBER: P3AS13R309830DE010 E3DLP1WH

Luminous Intensity Polar Plot

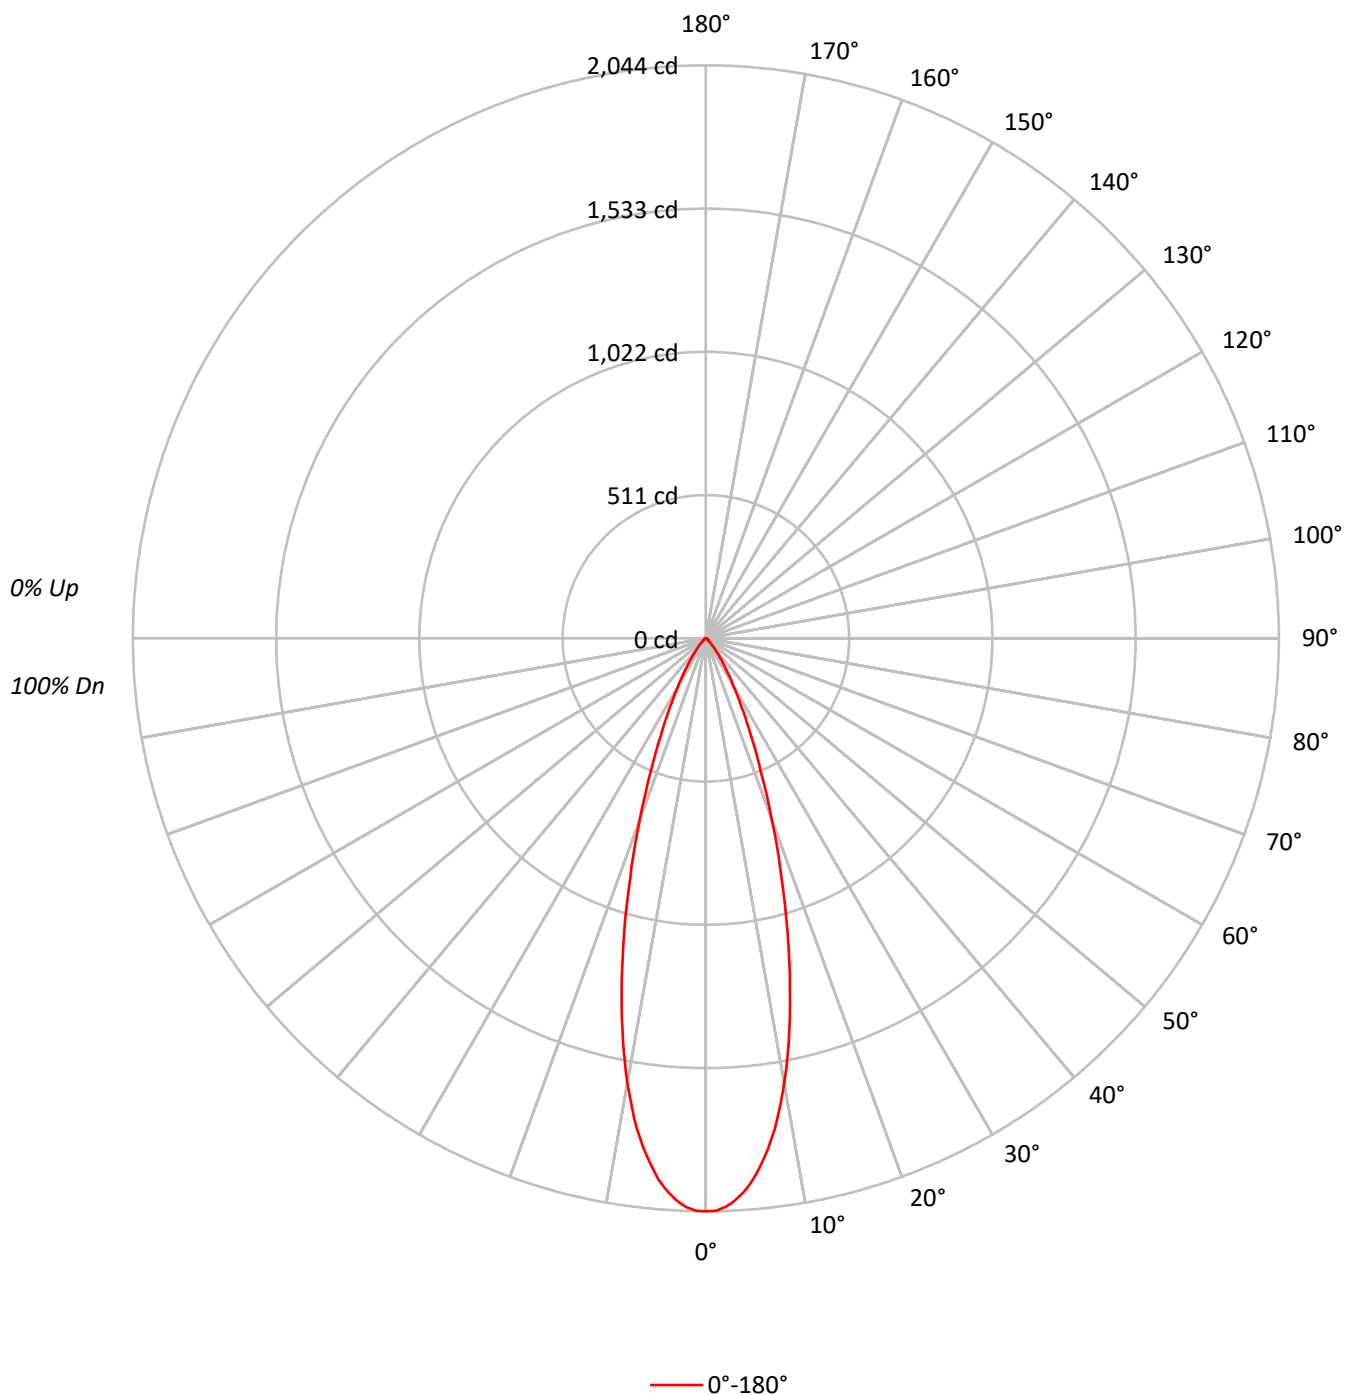

TEST NUMBER: P1274034

CATALOG NUMBER: P3AS13R309830DE010 E3DLP1WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	110	108	112	110	108	106	106	104	103		102	101	100		99
2	110	105	102	99	107	104	101	98	101	98	96		98	96	94		95
3	105	100	96	92	103	98	95	91	96	93	90		94	91	89		91
4	101	95	90	87	99	94	89	86	92	88	85		90	87	84		88
5	97	90	85	82	96	89	85	81	88	84	81		86	83	80		85
6	94	86	81	78	92	85	81	77	84	80	77		83	79	76		81
7	90	82	77	74	89	82	77	74	81	76	73		80	76	73		78
8	87	79	74	71	86	79	74	71	78	73	70		77	73	70		76
9	84	76	71	68	83	75	71	68	75	70	67		74	70	67		73
10	81	73	68	65	80	73	68	65	72	68	65		71	67	65		71

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	448144
5°	426545
10°	358778
15°	258753
20°	160501
25°	91288
30°	50691
35°	27572
40°	14542
45°	7877
50°	4196
55°	2791
60°	2544
65°	2646
70°	2308
75°	1864
80°	1894
85°	1761

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 7877 cd/sqm

TEST NUMBER: P1274034

CATALOG NUMBER: P3AS13R309830DE010 E3DLP1WH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	174.5	22.7
10°-20°	310.2	40.4
20°-30°	179.3	23.3
30°-40°	68.0	8.9
40°-50°	20.9	2.7
50°-60°	7.0	0.9
60°-70°	4.8	0.6
70°-80°	2.6	0.3
80°-90°	0.8	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	663.9	86.4
0°-40°	731.9	95.3
0°-60°	759.8	98.9
0°-90°	768.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	768.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2044	
5°	1938	174
15°	1140	310
25°	377	179
35°	103	68
45°	25	21
55°	7	7
65°	5	5
75°	2	3
85°	1	1
90°	0	

TEST NUMBER: P1274034

CATALOG NUMBER: P3AS13R309830DE010 E3DLP1WH

CANDELA DISTRIBUTION (FULL):

0°	
0°	2043.7
1°	2042.3
2°	2030.0
3°	2006.7
4°	1977.7
5°	1937.8
6°	1887.0
7°	1830.4
8°	1767.3
9°	1691.9
10°	1611.3
11°	1524.3
12°	1432.1
13°	1335.6
14°	1237.7
15°	1139.8
17.5°	898.9
20°	687.8
22.5°	510.0
25°	377.3
27.5°	274.2
30°	200.2
32.5°	144.4
35°	103.0
37.5°	71.8
40°	50.8
42.5°	35.5
45°	25.4
47.5°	17.4
50°	12.3
52.5°	8.7
55°	7.3
57.5°	6.5
60°	5.8
62.5°	5.1
65°	5.1
67.5°	4.4
70°	3.6
72.5°	2.9
75°	2.2
77.5°	2.2
80°	1.5
82.5°	1.5
85°	0.7
87.5°	0.0



TEST NUMBER: P1274034

CATALOG NUMBER: P3AS13R309830DE010 E3DLP1WH

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)