

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1274055

Luminaire Tested: P3AS13R359830DE010 E3DLD1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1274055
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-18)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R359830DE010 E3DLD1MW
Description: 3in Adjustable LED luminaire with, R35 optic, 3000K CCT AND, 98CRI , E3DLD1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 587.0 lumens
Efficiency: N/A
Efficacy: 40.5 lumens/watt
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.87
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1274055

CATALOG NUMBER: P3AS13R359830DE010 E3DLD1MW

Luminous Intensity Polar Plot

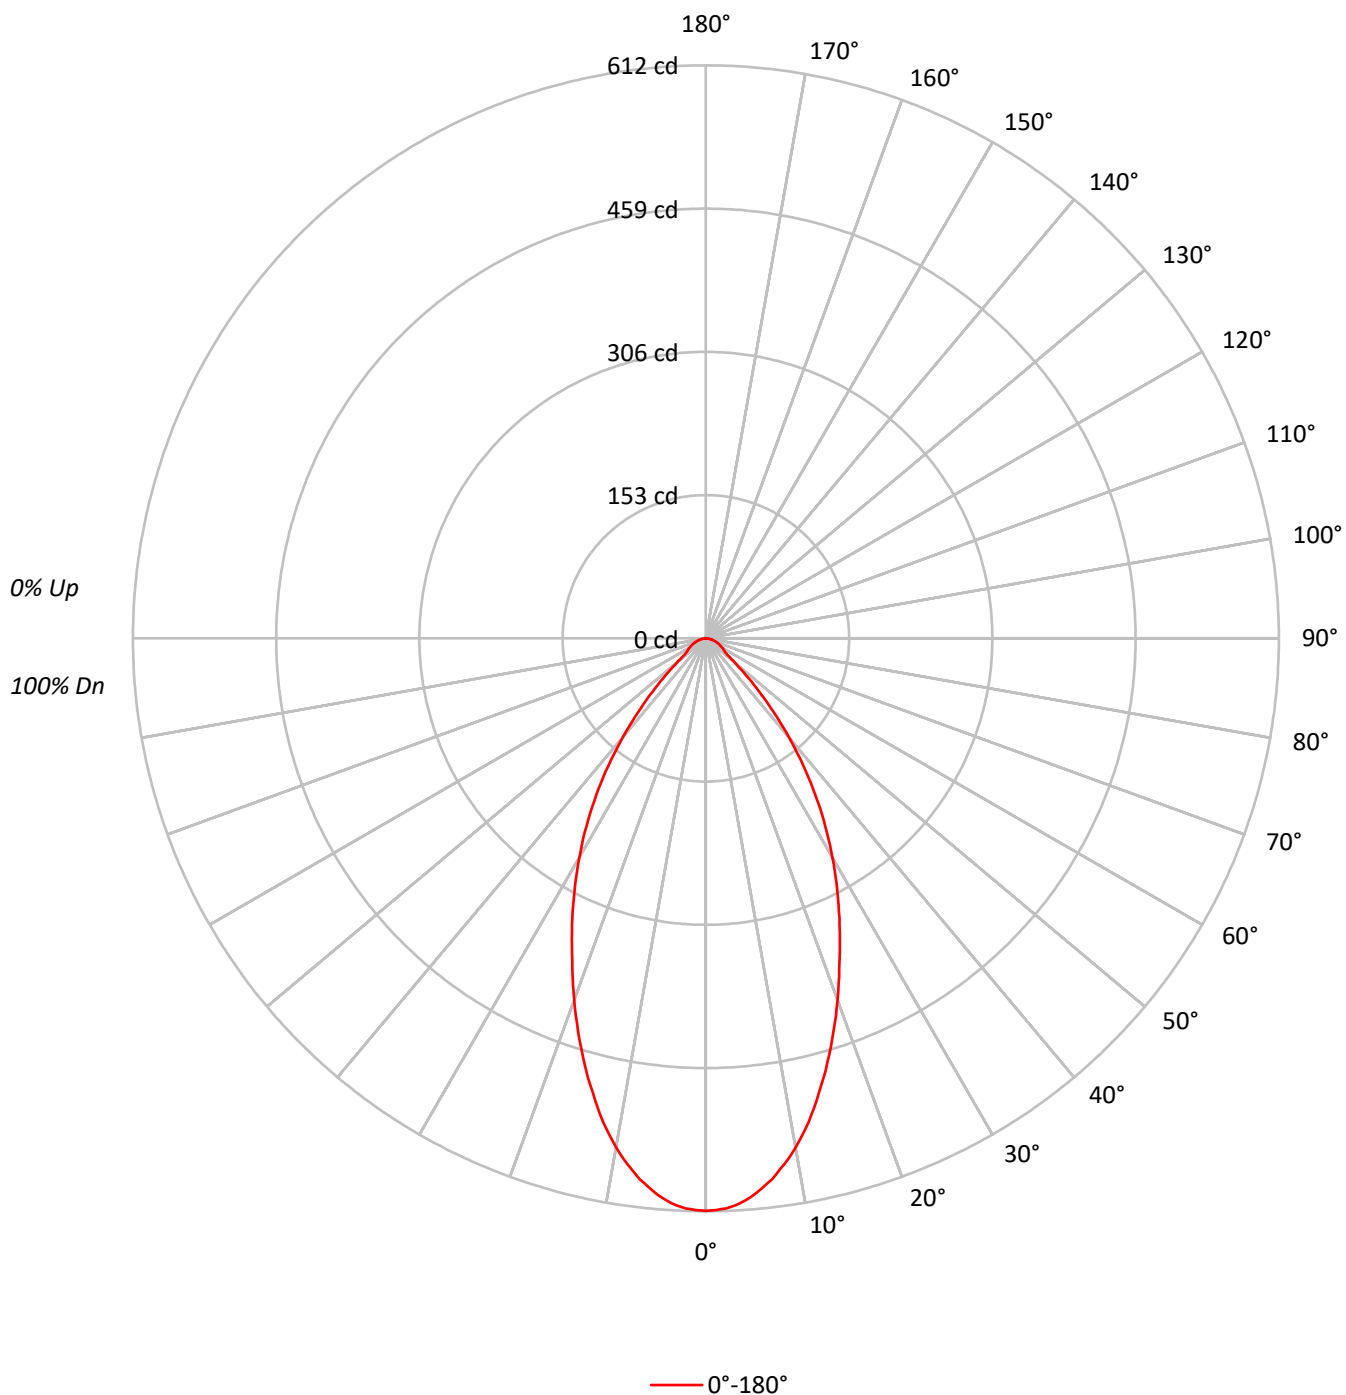

TEST NUMBER: P1274055

CATALOG NUMBER: P3AS13R359830DE010 E3DLD1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	104	110	107	104	102	103	101	99		99	98	96		96
2	106	100	96	92	104	98	94	91	95	92	89		92	89	87		89
3	100	92	87	82	98	91	86	81	88	84	80		86	82	79		83
4	94	85	79	74	92	84	78	74	82	77	73		80	75	72		78
5	89	79	73	68	87	78	72	67	76	71	67		75	70	66		73
6	84	74	67	62	82	73	67	62	71	66	61		70	65	61		68
7	79	69	62	57	78	68	62	57	67	61	57		65	60	57		64
8	75	64	58	53	74	64	57	53	63	57	53		62	56	53		61
9	71	60	54	50	70	60	54	50	59	53	49		58	53	49		57
10	67	57	51	46	66	56	50	46	56	50	46		55	50	46		54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	134090
5°	131257
10°	122910
15°	110330
20°	95978
25°	81779
30°	68517
35°	54556
40°	39445
45°	24964
50°	13611
55°	9443
60°	8903
65°	8302
70°	7886
75°	6778
80°	6440
85°	5535

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 24964 cd/sqm

TEST NUMBER: P1274055

CATALOG NUMBER: P3AS13R359830DE010 E3DLD1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	55.5	9.5
10°-20°	135.2	23.0
20°-30°	155.0	26.4
30°-40°	126.5	21.5
40°-50°	63.8	10.9
50°-60°	23.7	4.0
60°-70°	15.9	2.7
70°-80°	8.8	1.5
80°-90°	2.7	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	345.7	58.9
0°-40°	472.2	80.4
0°-60°	559.7	95.3
0°-90°	587.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	587.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	612	
5°	596	55
15°	486	135
25°	338	155
35°	204	126
45°	80	64
55°	25	24
65°	16	16
75°	8	9
85°	2	3
90°	0	

TEST NUMBER: P1274055

CATALOG NUMBER: P3AS13R359830DE010 E3DLD1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	611.5
1°	610.8
2°	609.3
3°	606.4
4°	602.1
5°	596.3
6°	589.0
7°	581.8
8°	572.3
9°	562.9
10°	552.0
11°	540.4
12°	528.1
13°	514.3
14°	499.8
15°	486.0
17.5°	449.0
20°	411.3
22.5°	372.8
25°	338.0
27.5°	303.9
30°	270.6
32.5°	237.2
35°	203.8
37.5°	170.5
40°	137.8
42.5°	107.4
45°	80.5
47.5°	58.0
50°	39.9
52.5°	29.0
55°	24.7
57.5°	22.5
60°	20.3
62.5°	18.1
65°	16.0
67.5°	13.8
70°	12.3
72.5°	10.2
75°	8.0
77.5°	6.5
80°	5.1
82.5°	3.6
85°	2.2
87.5°	1.5



TEST NUMBER: P1274055

CATALOG NUMBER: P3AS13R359830DE010 E3DLD1MW

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)