

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1274475

Luminaire Tested: P3AS17R509830DE010 E3D1WH

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1274475
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-13)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R509830DE010 E3D1WH
Description: 3in Adjustable LED luminaire with, R50 optic, 3000K CCT AND, 98CRI , E3D1WH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1632.0 lumens
Efficiency: N/A
Efficacy: 80.0 lumens/watt
Spacing Criteria (0/90/45): 0.82 / 0.82 / 0.77
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 20.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1274475

CATALOG NUMBER: P3AS17R509830DE010 E3D1WH

Luminous Intensity Polar Plot

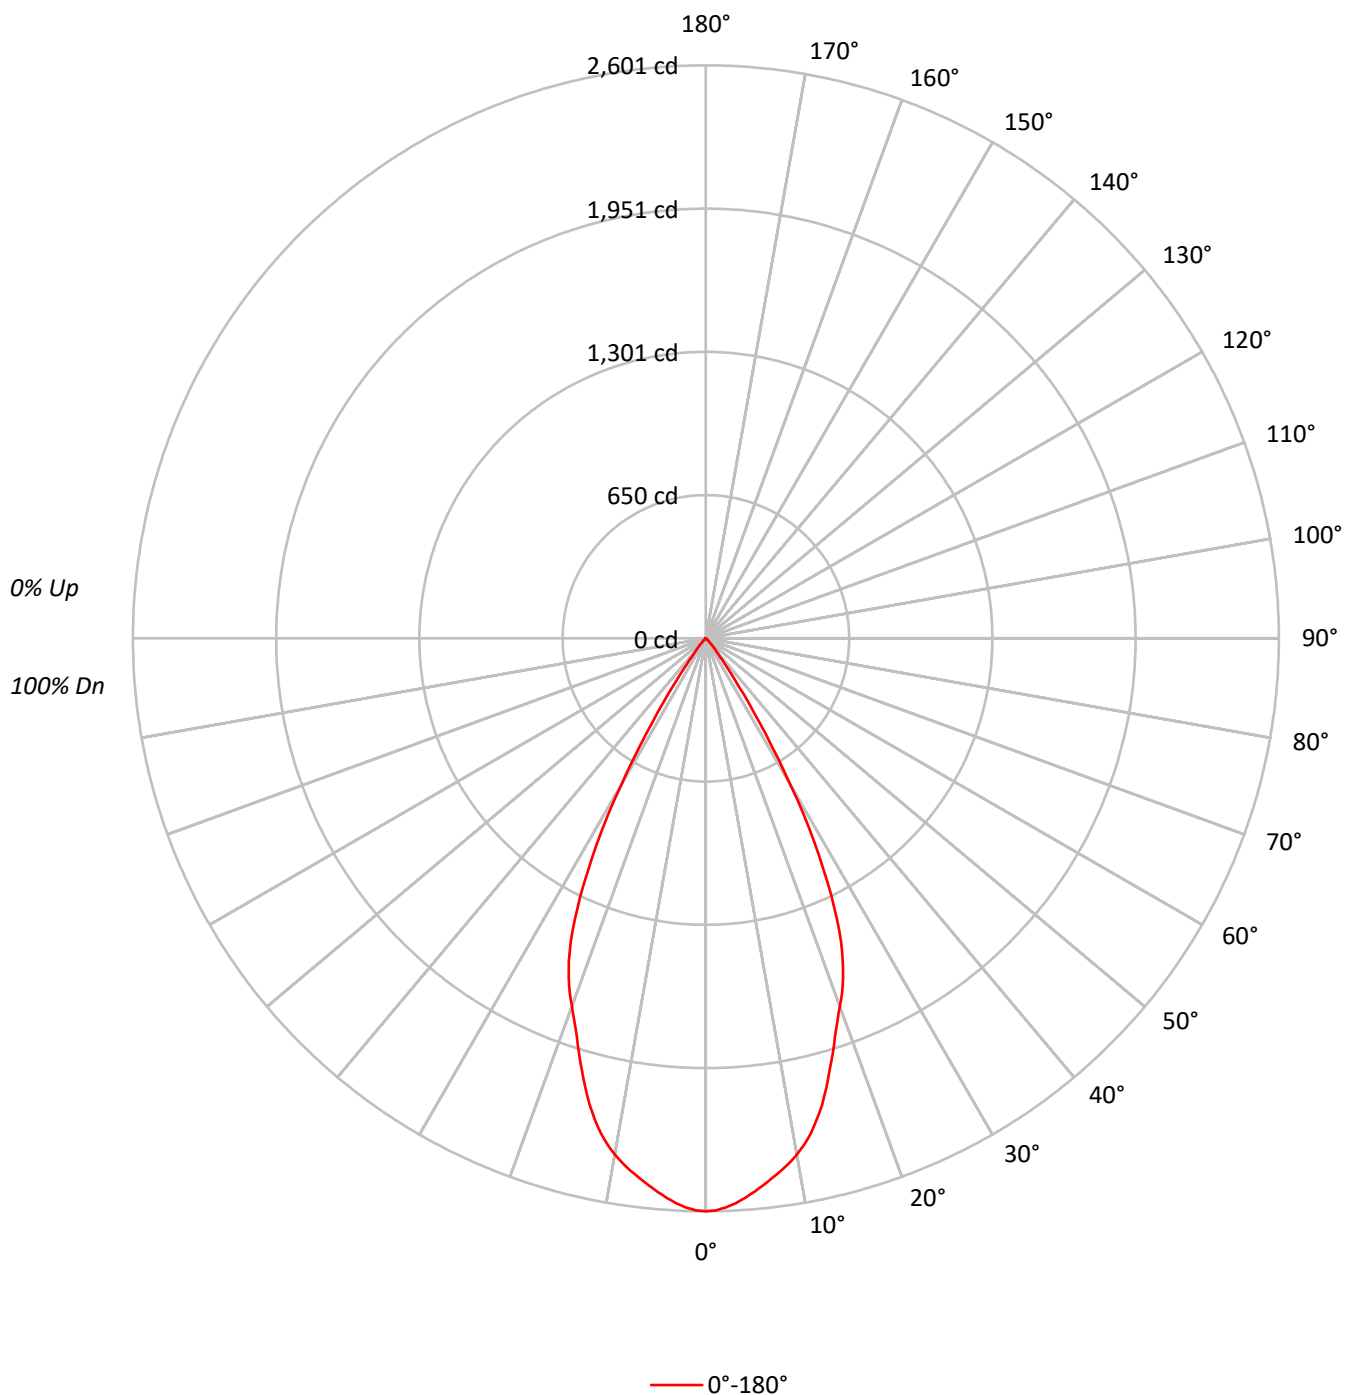

TEST NUMBER: P1274475

CATALOG NUMBER: P3AS17R509830DE010 E3D1WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	109	107	112	110	108	106	105	104	102		102	101	99		98
2	109	105	101	98	107	103	100	97	100	97	95		97	95	93		94
3	105	99	95	91	103	98	94	90	95	92	89		93	90	88		91
4	100	94	89	85	99	92	88	85	90	87	84		88	85	83		87
5	96	89	84	80	94	88	83	79	86	82	79		84	81	78		83
6	92	84	79	75	91	83	78	75	82	78	74		81	77	74		79
7	88	80	75	71	87	79	74	71	78	74	70		77	73	70		76
8	84	76	71	67	83	76	71	67	75	70	67		74	69	66		73
9	81	73	67	64	80	72	67	64	71	67	63		70	66	63		70
10	78	69	64	61	77	69	64	61	68	64	60		67	63	60		67

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	570327
5°	555138
10°	529761
15°	479594
20°	414926
25°	340350
30°	195498
35°	60739
40°	16316
45°	5706
50°	1365
55°	459
60°	263
65°	311
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 5706 cd/sqm

TEST NUMBER: P1274475

CATALOG NUMBER: P3AS17R509830DE010 E3D1WH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	236.2	14.5
10°-20°	585.4	35.9
20°-30°	615.2	37.7
30°-40°	176.1	10.8
40°-50°	17.2	1.1
50°-60°	1.4	0.1
60°-70°	0.5	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1436.8	88.0
0°-40°	1612.9	98.8
0°-60°	1631.5	100.0
0°-90°	1632.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1632.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2601	
5°	2522	236
15°	2113	585
25°	1407	615
35°	227	176
45°	18	17
55°	1	1
65°	1	1
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1274475

CATALOG NUMBER: P3AS17R509830DE010 E3D1WH

CANDELA DISTRIBUTION (FULL):

0°	
0°	2600.9
1°	2596.8
2°	2585.3
3°	2568.6
4°	2546.2
5°	2522.0
6°	2496.1
7°	2468.4
8°	2442.5
9°	2412.6
10°	2379.2
11°	2340.6
12°	2296.3
13°	2241.0
14°	2181.1
15°	2112.6
16°	2040.0
17°	1969.8
18°	1897.8
19°	1834.5
20°	1778.1
21°	1723.9
22°	1662.3
23°	1591.5
24°	1508.6
25°	1406.7
26°	1296.1
27°	1172.9
28°	1050.2
29°	917.8
30°	772.1
31°	635.7
32°	510.2
32.5°	455.5
33°	400.2
34°	306.9
35°	226.9
36°	166.4
37°	123.8
37.5°	107.1
38°	92.7
39°	72.0
40°	57.0
42.5°	32.2
45°	18.4



TEST NUMBER: P1274475

CATALOG NUMBER: P3AS17R509830DE010 E3D1WH

CANDELA DISTRIBUTION (continued):

	0°
47.5°	10.4
50°	4.0
52.5°	1.7
55°	1.2
57.5°	1.2
60°	0.6
62.5°	0.6
65°	0.6
67.5°	0.6
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)