

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1274531

Luminaire Tested: P3AS17R609830DE010 E3D1LI

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1274531
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-15)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R609830DE010 E3D1LI
Description: 3in Adjustable LED luminaire with, R60 optic, 3000K CCT AND, 98CRI , E3D1LI TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1408.1 lumens
Efficiency: N/A
Efficacy: 69.0 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.88
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 20.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1274531

CATALOG NUMBER: P3AS17R609830DE010 E3D1LI

Luminous Intensity Polar Plot

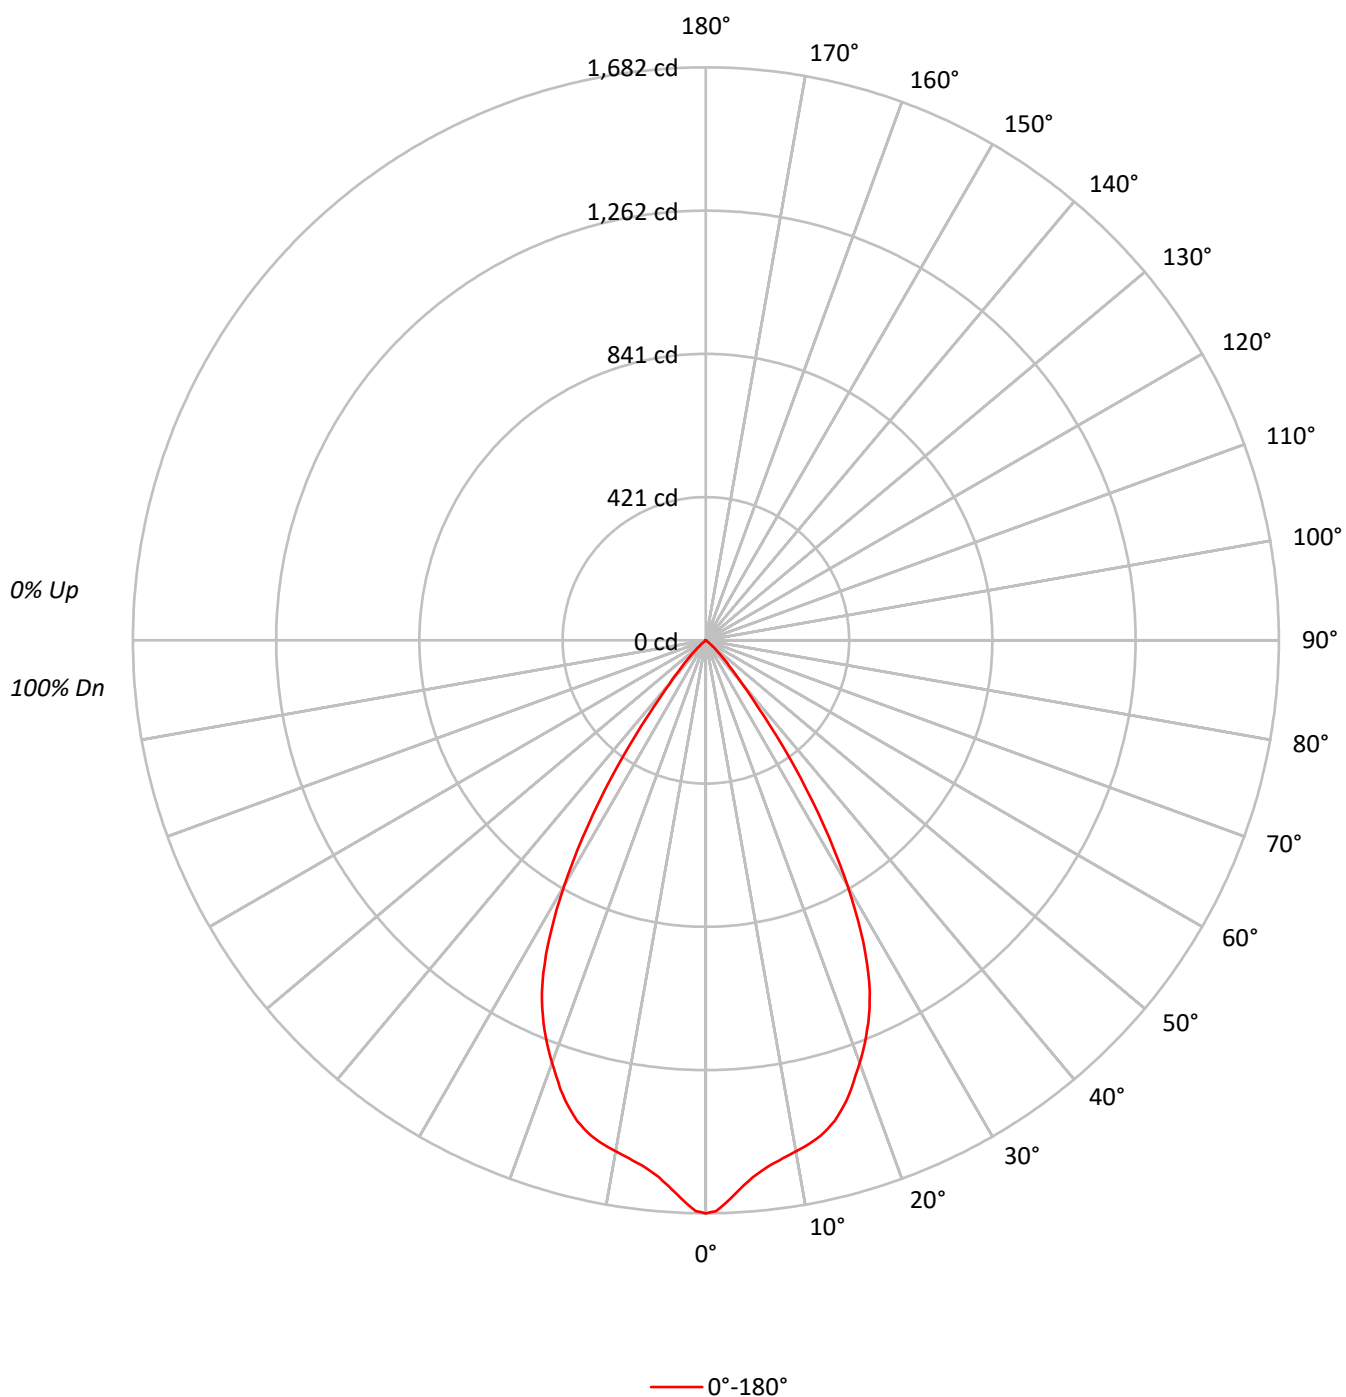



TEST NUMBER: P1274531

CATALOG NUMBER: P3AS17R609830DE010 E3D1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	106	111	109	107	105	105	103	102		101	100	99		98	97	96	94
2	108	104	100	96	106	102	98	95	99	96	93		96	93	91		93	91	89	88
3	103	97	92	88	101	96	91	88	93	89	86		91	87	85		88	86	84	82
4	98	91	85	81	96	90	85	81	88	83	80		86	82	79		84	81	78	77
5	93	85	80	75	92	84	79	75	83	78	74		81	77	74		79	76	73	72
6	89	80	74	70	87	79	74	70	78	73	70		77	72	69		75	71	69	67
7	85	76	70	66	83	75	69	65	74	69	65		72	68	65		71	67	64	63
8	81	71	65	61	79	71	65	61	70	65	61		69	64	61		68	64	61	59
9	77	67	62	58	76	67	61	58	66	61	57		65	61	57		64	60	57	56
10	73	64	58	54	72	63	58	54	63	58	54		62	57	54		61	57	54	53

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	368918
5°	348271
10°	339205
15°	331466
20°	308190
25°	275508
30°	210437
35°	121506
40°	47145
45°	19661
50°	4332
55°	650
60°	526
65°	311
70°	385
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 19661 cd/sqm

TEST NUMBER: P1274531

CATALOG NUMBER: P3AS17R609830DE010 E3D1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	149.4	10.6
10°-20°	406.7	28.9
20°-30°	509.4	36.2
30°-40°	284.8	20.2
40°-50°	54.1	3.8
50°-60°	2.8	0.2
60°-70°	0.7	0.0
70°-80°	0.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1065.5	75.7
0°-40°	1350.2	95.9
0°-60°	1407.1	99.9
0°-90°	1408.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1408.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1682	
5°	1582	149
15°	1460	407
25°	1139	509
35°	454	285
45°	63	54
55°	2	3
65°	1	1
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1274531

CATALOG NUMBER: P3AS17R609830DE010 E3D1LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	1682.4
1°	1675.5
2°	1653.6
3°	1627.7
4°	1603.5
5°	1582.2
6°	1566.0
7°	1552.2
8°	1541.9
9°	1532.1
10°	1523.4
11°	1514.8
12°	1505.0
13°	1492.9
14°	1478.5
15°	1460.1
16°	1437.6
17°	1412.3
18°	1383.5
19°	1350.6
20°	1320.7
21°	1288.4
22°	1255.0
23°	1219.9
24°	1181.3
25°	1138.7
26°	1088.6
27°	1032.7
28°	969.9
29°	903.1
30°	831.1
31°	758.5
32°	683.7
32.5°	642.8
33°	605.9
34°	529.3
35°	453.9
36°	385.9
37°	313.9
37.5°	281.1
38°	248.8
39°	200.4
40°	164.7
42.5°	100.2
45°	63.4



TEST NUMBER: P1274531

CATALOG NUMBER: P3AS17R609830DE010 E3D1LI

CANDELA DISTRIBUTION (continued):

	0°
47.5°	35.1
50°	12.7
52.5°	2.9
55°	1.7
57.5°	1.2
60°	1.2
62.5°	0.6
65°	0.6
67.5°	0.6
70°	0.6
72.5°	0.6
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)