

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1274535

Luminaire Tested: P3AS17R609830DE010 E3DL1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1274535
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-39)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R609830DE010 E3DL1GPH
Description: 3in Adjustable LED luminaire with, R60 optic, 3000K CCT AND, 98CRI , E3DL1GPH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 606.0 lumens
Efficiency: N/A
Efficacy: 29.7 lumens/watt
Spacing Criteria (0/90/45): 0.87 / 0.87 / 0.87
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 20.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1274535
CATALOG NUMBER: P3AS17R609830DE010 E3DL1GPH

Luminous Intensity Polar Plot

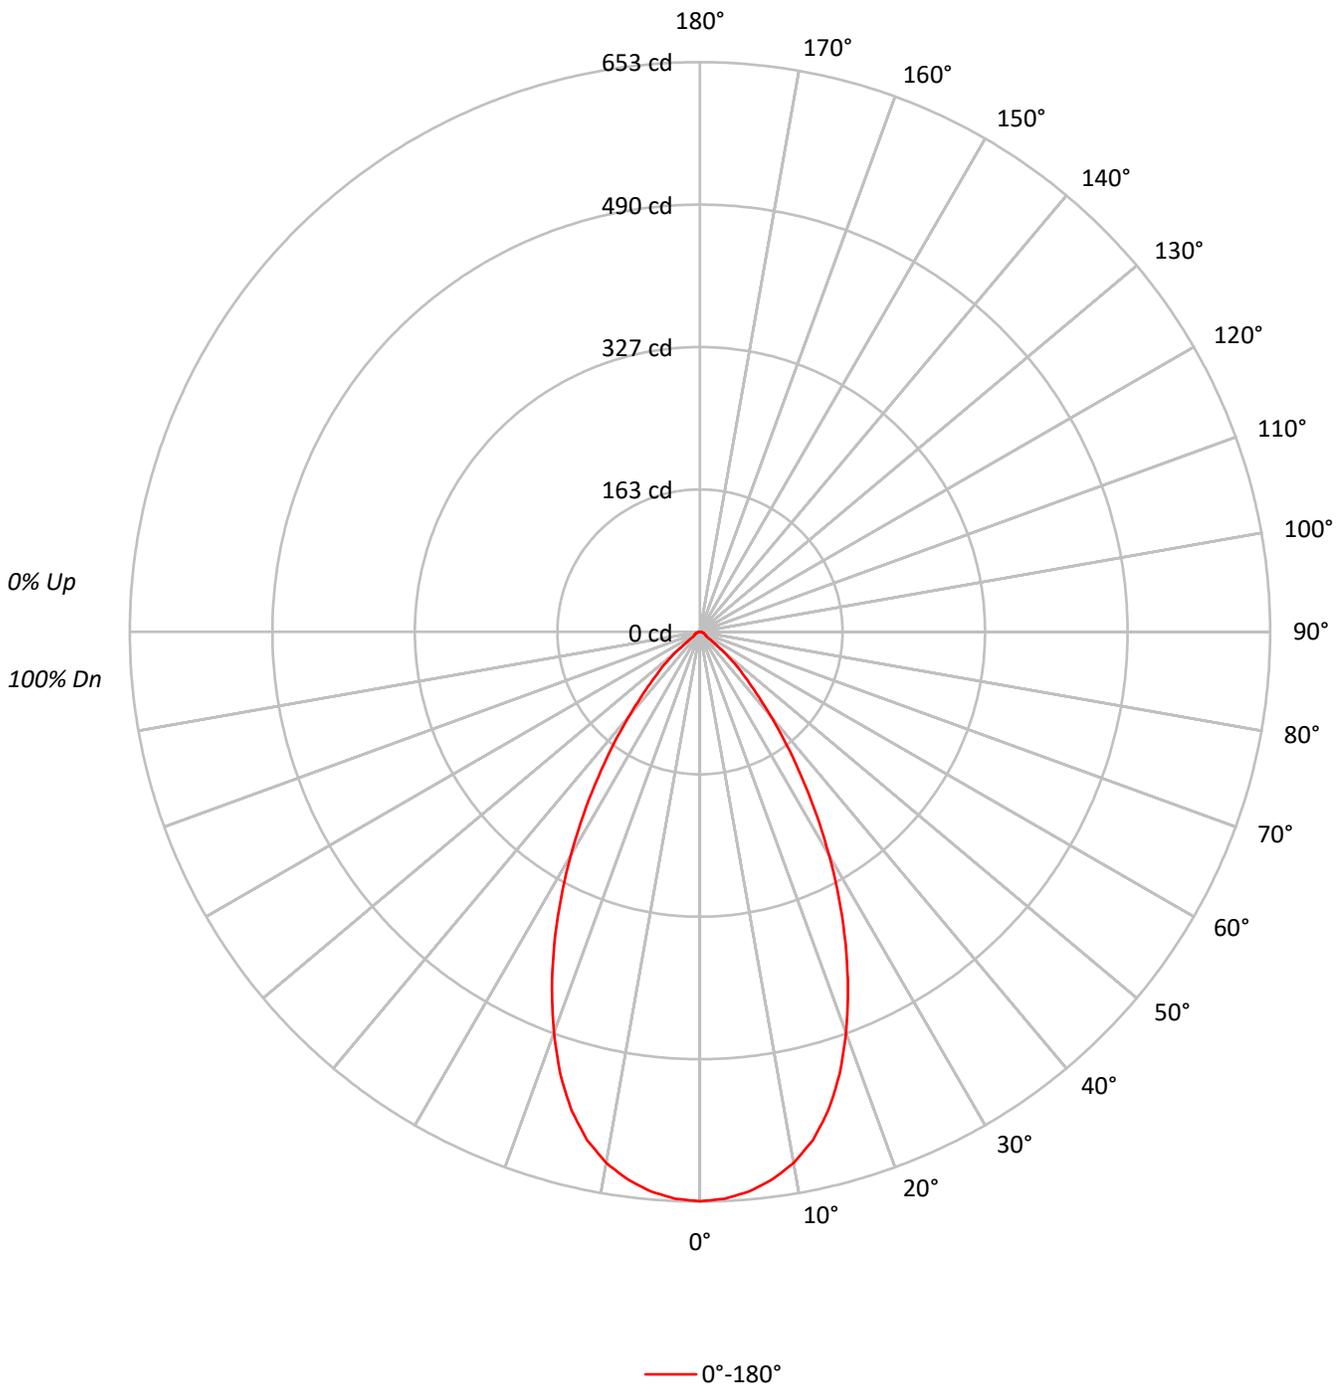



TEST NUMBER: P1274535
 CATALOG NUMBER: P3AS17R609830DE010 E3DL1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	113	110	108	105	111	108	106	103	104	102	100	100	99	97	97	96	94	93				93
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	85				85
3	101	95	89	85	99	93	88	84	91	86	83	88	85	82	86	83	80	79				79
4	96	88	82	78	94	87	81	77	85	80	76	83	79	75	81	77	75	73				73
5	91	82	76	71	89	81	75	71	79	74	70	78	73	70	76	72	69	68				68
6	86	77	70	66	84	76	70	66	74	69	65	73	68	65	72	68	64	63				63
7	82	72	66	61	80	71	65	61	70	65	61	69	64	60	67	63	60	59				59
8	77	68	61	57	76	67	61	57	66	60	57	65	60	56	64	59	56	55				55
9	74	64	57	53	72	63	57	53	62	57	53	61	56	53	60	56	53	51				51
10	70	60	54	50	69	60	54	50	59	53	50	58	53	50	57	53	49	48				48

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	143103
5°	141734
10°	137606
15°	128922
20°	114110
25°	95449
30°	74822
35°	54261
40°	36096
45°	22514
50°	12179
55°	3517
60°	3289
65°	3009
70°	2949
75°	2965
80°	2904
85°	3019

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 22514 cd/sqm



TEST NUMBER: P1274535
 CATALOG NUMBER: P3AS17R609830DE010 E3DL1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	60.6	10.0
10°-20°	157.6	26.0
20°-30°	179.6	29.6
30°-40°	127.3	21.0
40°-50°	57.8	9.5
50°-60°	12.3	2.0
60°-70°	5.9	1.0
70°-80°	3.7	0.6
80°-90°	1.3	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	397.8	65.6
0°-40°	525.1	86.7
0°-60°	595.2	98.2
0°-90°	606.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	606.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	653	
5°	644	61
15°	568	158
25°	394	180
35°	203	127
45°	73	58
55°	9	12
65°	6	6
75°	4	4
85°	1	1
90°	0	



TEST NUMBER: P1274535
CATALOG NUMBER: P3AS17R609830DE010 E3DL1GPH

CANDELA DISTRIBUTION (FULL):

	0°
0°	652.6
2.5°	650.3
5°	643.9
7.5°	633.0
10°	618.0
12.5°	596.7
15°	567.9
17.5°	531.6
20°	489.0
22.5°	442.9
25°	394.5
27.5°	345.0
30°	295.5
32.5°	248.2
35°	202.7
37.5°	162.4
40°	126.1
42.5°	95.6
45°	72.6
47.5°	54.1
50°	35.7
52.5°	16.7
55°	9.2
57.5°	8.1
60°	7.5
62.5°	6.9
65°	5.8
67.5°	5.2
70°	4.6
72.5°	4.0
75°	3.5
77.5°	2.9
80°	2.3
82.5°	1.7
85°	1.2
87.5°	0.6
90°	0.0

(END OF REPORT)